

# ROBOMATIS



## PACKING MACHINES AND MATERIALS

PRODUCT CATALOG 2026





# ABOUT US

**More than 30 years of experience with packing solutions – we make the packing process safe and easy.**

Robomatis d.o.o. is a European provider of packing solutions and workflow automation for small and medium-sized companies. We have served more than a thousand customers across Europe – manufacturers, warehouses, logistics, wholesale and transport companies that handle physical products every day.

Our range covers everything a packing line needs: battery and pneumatic strapping tools, strapping machines, pallet wrapping machines, carton sealers, shrink wrapping, balers, material handling and the consumables that go with them. Every product in this catalog is sold in our web shop with delivery across Europe, and our service team supports you after the sale.

**214**

products in this catalog

**15**

product groups

**EU**delivery and service across  
Europe

**Vision.** By innovating and using new technologies, we are the leading provider of workflow optimisation solutions for small and medium-sized enterprises in Europe, enabling them to automate, digitalise and optimise their processes.

**Mission.** We improve work processes in companies by automating routine tasks and introducing new technologies, so that employees can focus on productive work.

**How to use this catalog.** Every product has an article number and a QR code. Scan the code to see the current price, stock and full documentation in our web shop, or send us the article numbers and we will prepare an offer.

**Robomatis d.o.o.** · Prešernova cesta 8, 3320 Velenje, Slovenia

Phone +386 70 450 773 · [sales@robomatis.com](mailto:sales@robomatis.com) · [www.batterystrapping.com](http://www.batterystrapping.com)



# PRODUCTS

|           |                                                            |            |
|-----------|------------------------------------------------------------|------------|
| <b>01</b> | <b>Battery strapping tools</b> 19 products                 | <b>5</b>   |
| <b>02</b> | <b>Pneumatic &amp; manual strapping tools</b> 9 products   | <b>15</b>  |
| <b>03</b> | <b>Strapping kits</b> 18 products                          | <b>20</b>  |
| <b>04</b> | <b>Strapping bands, seals &amp; dispensers</b> 24 products | <b>30</b>  |
| <b>05</b> | <b>Strapping &amp; banding machines</b> 14 products        | <b>43</b>  |
| <b>06</b> | <b>Pallet wrapping machines</b> 17 products                | <b>51</b>  |
| <b>07</b> | <b>Carton sealers &amp; case erectors</b> 8 products       | <b>60</b>  |
| <b>08</b> | <b>Shrink wrapping machines</b> 8 products                 | <b>65</b>  |
| <b>09</b> | <b>Sealing, labelling &amp; coding</b> 15 products         | <b>70</b>  |
| <b>10</b> | <b>Conveyors &amp; packing lines</b> 6 products            | <b>78</b>  |
| <b>11</b> | <b>Packing materials</b> 9 products                        | <b>82</b>  |
| <b>12</b> | <b>Balers &amp; cardboard shredders</b> 20 products        | <b>87</b>  |
| <b>13</b> | <b>Pallet trucks, stackers &amp; forklifts</b> 15 products | <b>98</b>  |
| <b>14</b> | <b>Industrial equipment</b> 19 products                    | <b>106</b> |
| <b>15</b> | <b>Spare parts &amp; accessories</b> 13 products           | <b>116</b> |



01



### NEO 9-16mm PET/PP battery strapping tool including battery and charger

Art. no. **110010**



Price & details

- Affordable & low maintenance
- Ergonomic – weights only 3.4kg
- Maximum tension force is 2800N
- Battery capacity is 6000mAh (Lithium battery)
- For up to 800 straps with one charge
- For PET and PP straps 9-16mm
- Easy to use and simple to be adjusted

#### TECHNICAL DATA

|                       |                                                                             |                     |                                                                       |
|-----------------------|-----------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------|
| Weight                | <b>3.4KG</b>                                                                | Machine dimensions  | <b>350*140*120MM</b>                                                  |
| Maximum tension force | <b>2800N</b>                                                                | Strap sealing form  | <b>friction welding</b>                                               |
| Application straps    | <b>PP/PET belts</b>                                                         | Strap width         | <b>9-16MM</b>                                                         |
| Strapping thickness   | <b>0.5-1.2MM</b>                                                            | Battery capacity    | <b>Lithium battery (DC14.4V、6000MAH)</b>                              |
| Charger               | <b>input voltage (AC100-245V、50-60HZ)<br/>output voltage (DC16.8V-3....</b> | Battery life        | <b>Up to 2000 times</b>                                               |
| accessories           | <b>A set of commonly used tools and gear washers.</b>                       | After-sales service | <b>The whole machine is guaranteed for 1 year, except for wear...</b> |



## Battery Powered Strapping Tool NEO2 9-16mm PET/PP incl. Battery & Charger

Art. no. **110012**



Price & details



- NEO2 9-16mm Battery Strapping Tool supports PET and PP straps
- Powerful lithium battery provides up to 600 strapping cycles
- Adjustable tension ranges from 500 to 3200N for various loads
- Compact dimensions 315mm x 140mm x 120mm for better handling
- Operates in both semi-automatic and automatic modes seamlessly
- Digital display ensures precise tension and bonding adjustments
- Brushless motor offers extended lifespan and reduced maintenance

### TECHNICAL DATA

|                     |                                                |                           |                               |
|---------------------|------------------------------------------------|---------------------------|-------------------------------|
| Operating Modes     | Semi-automatic and automatic                   | Battery Type              | Lithium-ion, 5000mAh capacity |
| Battery Cycles      | Up to 600 per charge                           | Tension Range             | 500 to 3200N                  |
| Strap Compatibility | PET and PP (9-16mm width, 0.5-1.2mm thickness) | Dimensions                | 315mm x 140mm x 120mm         |
| Weight              | 2.8kg (tool only), 620g (battery)              | Friction Welding Strength | Approx. 75% of strap strength |
| Charging Time       | 45-60 minutes                                  | Motor Type                | Brushless motor               |
| Display             | Digital display for adjustments                | Ambient Temperature       | 5°C to 45°C                   |

## NEO Plus 16-19mm (5/8"-3/4") Battery Strapping Tool for PET/PP strap incl. 2 batteries & charger

Art. no. **110020**



Price & details



- Easy-to-use and highly efficient automatic battery hand strapping tool
- Suitable for PET and PP plastic strap
- Strap width: 16mm – 19mm
- Adjustable tension force: 600N – 4000N
- Maximum tensioning speed : 225mm/min
- Joint type: friction-weld seal
- The lightest tool on the market: 3,8 kg including battery

### TECHNICAL DATA

|                                      |                                                    |                         |                           |
|--------------------------------------|----------------------------------------------------|-------------------------|---------------------------|
| Weight                               | 3.8kg (incl. battery)                              | Dimensions (L x W x H)  | 360mm x 135mm x 130mm     |
| Tension force                        | 600N – 4000N                                       | Tensioning speed        | 225mm/s                   |
| Sealing                              | Friction welding                                   | Battery charger voltage | 100/220V                  |
| Battery                              | 14.4V/4.0Ah Li-Ion                                 | Charging time           | 60min                     |
| Maximum number of straps/fully ch... | 400-500 times depending on strap and tension force | Battery performance     | 'Rechargeable 2000        |
| Strap                                | PP/PET                                             | Strap width             | 16mm (5/8)" – (3/4)" 19mm |
| Strap thickness                      | PP (0.6-1.0mm)/PET(0.5-1.0mm)                      |                         |                           |



## TES Plus 16-19mm (5/8"-6/8") Battery Strapping Tool PET/PP strap incl. 2 Batteries & Charger

Art. no. **110050**



Price & details

- Affordable price
- Very strong – tension force up to 4000N
- For heavy-duty strapping
- 2x batteries + charger
- high-grade friction weld seal
- Strap thickness: 0.5 – 1.2 mm
- Strap width: from 16mm to 19 mm

### TECHNICAL DATA

|                 |                                                                |                            |                                    |
|-----------------|----------------------------------------------------------------|----------------------------|------------------------------------|
| Usage           | Battery strapping tool TES Plus 16-19mm is widely used in t... | Size of the strapping tool | 350 x 135 x 170 mm                 |
| Weight          | 4,3 kg                                                         | Strap width                | from 16 to 19 mm                   |
| Strap thickness | 0.5 – 1.2 mm                                                   | Apply straps               | PET and PP strap                   |
| Seal            | high-grade friction weld seal                                  | Maximum tension force      | 60-4000N                           |
| Battery         | Two batteries per set ( 14.8V-4000mAh 59.2Wh )                 | Charger                    | 110 – 240V – 50-60Hz DC12.6V=4,0Ah |
| Charging time   | 90 minutes – 150 and 220 seals                                 |                            |                                    |



## Battery-powered automatic strapping tool TES EXTREME 19-25mm – DD25A/0.5 to 1.2mm – 5000N (3.0Ah Lith.) 1x charger 2x battery

Art. no. **110055**



Price & details

- Supports 19-25mm PET and PP straps seamlessly
- High Tension : Adjustable tension range from 400 to 5000 N
- Fast Operation : Tensioning speed of 180 mm/sec for quick strapping
- Powerful Battery : 14.8V lithium-ion battery with 90-minute recharge time
- Compact Design : Lightweight at 4.32 kg, easy to handle
- Versatile Use : Suitable for logistics, manufacturing, and agriculture applications
- Enhanced Safety : PET straps prevent damage and ensure operator safety

### TECHNICAL DATA

|                    |                                |                               |                                            |
|--------------------|--------------------------------|-------------------------------|--------------------------------------------|
| Strap Type         | PET/PP                         | Strap Width                   | 19 – 25 mm                                 |
| Strap Thickness    | 0.8 – 1.2 mm                   | Tension Range                 | 400 – 5000 N, Adjustable                   |
| Tensioning Speed   | 180 mm/sec                     | Adhesion Strength             | Up to 75% (Dependent on Strap Quality)     |
| Adhesion Method    | Friction Weld                  | Battery                       | 14.8 V – 4.0 Ah Lithium-ion Battery        |
| Charging Time      | 90 Minutes                     | Charging Voltage              | 100 – 240 VAC, 50/60 Hz, DC 16.8 V – 3.0 A |
| Machine Dimensions | L 350 mm × W 135 mm × H 170 mm | Machine Weight (with Battery) | 4.32 kg                                    |
| Package Dimensions | L 440 mm × W 280 mm × H 185 mm | Gross Weight                  | 7 kg                                       |



## Battery Operated Strapping Tool TES PRO 12-16mm (1/2"-5/8") for PP/PET Strap incl. 2 Batteries & Charger

Art. no. **T10060**



Price & details

- TES PRO 12-16mm battery powered strapping tool improves operations
- Compact design ensures easy handling and high portability
- Digital display provides precise control for tension and welding settings
- Brushless motor enhances efficiency and reduces maintenance requirements
- Compatible with PP and PET straps of 12-16mm width
- Adjustable tension force between 900 and 3200N for versatility
- Friction-welding mechanism ensures secure seals with 75% strap strength

### TECHNICAL DATA

|                     |                                    |                     |                                      |
|---------------------|------------------------------------|---------------------|--------------------------------------|
| Tool Dimensions     | 380mm x 130mm x 130mm              | Tool Weight         | 3.1 kg                               |
| Battery Type        | Lithium                            | Battery Voltage     | 14.4V                                |
| Battery Capacity    | 4.0Ah                              | Strap Material      | PP (polypropylene) / PET (polyester) |
| Strap Size          | 12-16mm width, 0.4-1.2mm thickness | Tensioning Force    | 900-3200N                            |
| Tensioning Speed    | 100-200mm/s                        | Welding Time        | Adjustable, 1.0-5.0 seconds          |
| Sealing Strength    | Approx. 75% of strap strength      | Working Temperature | 5°C to 45°C                          |
| Optimal Temperature | 15°C to 20°C                       |                     |                                      |



## Battery Powered PET Strapping Tool GT ONE 10-16mm (3/8"-5/8") for PET/PP Strap w/ Battery & Charger

Art. no. **T10070**



Price & details

- For plastic PET and PP strap width 10-16 mm
- Automatic, Semi-automatic and Manual mode
- Adjustable tightening force: 500-2750N
- Can perform up to 400 strappings with one charge
- Lightweight – weighs only 3.7 kg
- Battery (4000 mAh 50/60HZ 75W) and charger are included
- Made in Italy

### TECHNICAL DATA

|                 |                                                                |                            |                                      |
|-----------------|----------------------------------------------------------------|----------------------------|--------------------------------------|
| Usage           | Battery strapping tool GT ONE 10-16mm al sorts of industrie... | Size of the strapping tool | L320mm x D100mm x H160mm             |
| Weight          | 3.7 Kg (inc. battery)                                          | Strap width                | from 10-16mm (3/8" to 5/8")          |
| Strap thickness | 0.5 – 1.1 mm                                                   | Appy straps                | PET and PP strap                     |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: 2750N / Soft Mode: 500N |
| Battery         | Battery Akku Power SP3 14.4 Vdc – 4.0 Ah Li-Ion                | Charger                    | 220V                                 |
| Charging time   | 30 minutes – 200/400 strapping                                 |                            |                                      |



## Battery Strapping Tool SIAT VIPER 9-16mm (3/8"-5/8")

Art. no. **110072**



Price & details

- SIAT VIPER battery powered banding tool for PP and PET
- Operates with 9 to 16 mm wide plastic straps
- Delivers tension force up to 2700 N for secure load
- Equipped with brushless motor for longer lifetime
- Includes Makita 18V 3Ah battery with fast charging
- Provides 250 to 550 cycles per full charge
- Features touchscreen control with eight programmable settings

### TECHNICAL DATA

|                          |                                               |                        |                                     |
|--------------------------|-----------------------------------------------|------------------------|-------------------------------------|
| Strap Type               | PP / PET                                      | Strap Width            | 9 – 12 – 16 mm (3/8 – 1/2 – 5/8 in) |
| Strap Thickness          | 0.5 – 1.1 mm                                  | Operating Modes        | Automatic / Semi-Automatic / Manual |
| Tension Force (Standard) | 1,200 – 2,700 N                               | Tension Force (Soft)   | 500 – 1,500 N                       |
| Max Tension Speed        | 200 mm/s                                      | Sealing Efficiency     | 75 – 85 %                           |
| Weight (incl. Battery)   | 3.9 kg                                        | Dimensions (L × W × H) | 369 × 165 × 123 mm                  |
| Battery                  | Makita Li-Ion 18 V – 3.0 Ah / 5.0 Ah optional | Charging Time          | ≈ 20 minutes                        |
| Cycles per Charge        | 250–350 (3 Ah) / 400–550 (5 Ah)               | Noise Level            | ≈ 96 dB(A)                          |



## Battery Powered Strapping Tool PET GT SMART Plus 9-16mm (3/8"-5/8") for PET/PP Strap w/ Battery & Charger

Art. no. **110080**



Price & details

- Battery strapping tool GT SMART Plus + battery + charger
- Max tension: 1800N
- Weight: 3.2kg without battery (the lightest tool in the market)
- Functioning mode: manual/soft
- Max. tension speed: 14m/min
- Battery SP3 (Akku Power) 14.4V – 4.0Ah Li-Ion
- Brushless motor

### TECHNICAL DATA

|                   |                                      |                   |                                       |
|-------------------|--------------------------------------|-------------------|---------------------------------------|
| Strap             | PP/PET                               | Strap width       | 9-16mm                                |
| Strap thickness   | 0.4-0.85mm                           | Seal efficiency   | 75-85%                                |
| Max tension       | Max. 1800N                           | Max tension speed | 14 m/min                              |
| Weight            | 3.2kg (without battery)              | Battery           | SP3 14.4V – 4.0Ah Li-Ion (Akku Power) |
| Cycles per charge | up to 300 (depending on application) | Charger           | AP I 2830 MV                          |
| Charging time     | 20min                                |                   |                                       |



## GT-XTREME 16-19mm Battery Strapping Tool for PET/PP strap

Art. no. **110090**

- Easy-to-use and highly efficient automatic battery strapping tool
- Adjustable operating mode: automatic, semi-automatic, manual, soft
- Horizontal and vertical strapping
- Strap type: PP/PET
- Strap width: 16mm/19mm
- Maximum tensioning speed: 9,0 mt/min
- Joint type: friction weld



Price & details

### TECHNICAL DATA

|              |                                      |                 |                                         |
|--------------|--------------------------------------|-----------------|-----------------------------------------|
| Power source | Battery                              | Operating modes | Automatic, Semi-automatic, Manual, Soft |
| Strap type   | PP/PET                               | Joint type      | Friction weld                           |
| Battery      | Battery power SP5 18 Vdc 5 Ah Li-Ion |                 |                                         |

## Electric Strapping Tool Messersi MB620 12-16mm (1/2"-5/8") PET/PP Strap incl. Battery & Charger

Art. no. **110100**



- Fully automatic battery strapping banding tool
- Ergonomic – perfectly balanced in all directions
- strapping tension can be adjusted from 10N to 2500N (2-560 lbs)
- Super light and safe to use battery banding machine
- battery lasts for up to 400 seals
- Digital display with always visible parameters and simple to adjust
- For wide 12-16mm (1/2" to 5/8") polyester (PET) and polypropylene (PP) straps



Price & details

### TECHNICAL DATA

|                 |                                                                |                            |                                          |
|-----------------|----------------------------------------------------------------|----------------------------|------------------------------------------|
| Usage           | Messersi MB620 battery hand tool 12-16mm (1/2" to 5/8") bat... | Size of the strapping tool | 330x150x130 mm                           |
| Weight          | 3.4 Kg (inc. battery)                                          | Strap width                | from 12-16mm (1/2" to 5/8")              |
| Strap thickness | 0.65 – 1.0 mm                                                  | Apply straps               | PET and PP strap                         |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: from 10N – 2500N (9-900lbs) |
| Battery         | Battery 14,8 V /2,0 A Li-Po complies with UN28.3 requiremen... | Charger                    | 220V                                     |
| Charging time   | 15-30 minutes – up to 400 strappings                           |                            |                                          |



## MB820 Battery Hand Tool 16-19mm (5/8" to 3/4") Battery Strapping Tool PET/PP strap incl. Battery & Charger

Art. no. **T10110**



Price & details

- Fully automatic battery strapping banding tool
- Fully charged Li-Ion battery supports up to max 400 cycles
- Ergonomic – perfectly balanced in all directions
- strapping tension can be adjusted from 40N to 4000N (9-900 lbs) .
- Super light and safe to use battery banding machine
- Digital display with always visible parameters and simple to adjust
- For wide 16-19mm polyester (PET) and polypropylene (PP) straps

### TECHNICAL DATA

|                 |                                                                |                            |                                          |
|-----------------|----------------------------------------------------------------|----------------------------|------------------------------------------|
| Usage           | MB820 battery hand tool 16-19mm (5/8" to 3/4") battery stra... | Size of the strapping tool | 330x150x130 mm                           |
| Weight          | 3.4 Kg (inc. battery)                                          | Strap width                | from 16-19mm (5/8" to 3/4")              |
| Strap thickness | 0.7 – 1.27 mm                                                  | Apply straps               | PET and PP strap                         |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: from 40N – 4000N (9-900lbs) |
| Battery         | Battery 14,8 V /2,0 A Li-Po complies with UN28.3 requiremen... | Charger                    | 220V                                     |
| Charging time   | 15-30 minutes – up to 400 strappings                           |                            |                                          |



## JET Battery Strapping Tool for 12-16mm (1/2"-5/8") PET/PP strap incl. Battery & Charger

Art. no. **T10120**



Price & details

- Customizable strapping tension – can be set to up to 2100 N
- Weights only 2.7kg with a battery
- With a Lithium battery, which has a capacity 3000mAh
- More than 300 strapping cycles with one single charge
- JET Battery Strapping Tool for 12-16mm (1/2"-5/8") PET/PP + Battery & Charger
- Warranty
- Fast Free Delivery

### TECHNICAL DATA

|                       |                                         |                             |                                          |
|-----------------------|-----------------------------------------|-----------------------------|------------------------------------------|
| Dimensions (L*W*H)    | 370*140*120 mm                          | Weight                      | 2,75kg (incl. battery)                   |
| Power                 | Lithium battery (DC14.4V, 3000MaH, 10C) | Tension Range               | 60-2100N or 6-214kg – adjustable         |
| Sealing time          | 1-3 seconds – adjustable                | Strapping width             | 12-16mm                                  |
| Strapping thickness   | 0.6-1mm                                 | Applicable straps           | Polypropylene (PP) and Polyester (PET)   |
| Strap sealing form    | Friction weld sealing                   | Endurance after full charge | About 300 strapping cycles               |
| Battery Charger       | Input voltage: 100-245V(AC), 50-60HZ,   |                             | Output voltage/current: 16.8V(DC)/3A(DC) |
| Battery charging time | About 70 minutes                        | Joint                       | Friction welding                         |



## Signode BXT3 9-19mm (3/8", 3/4") Battery Powered Strapping Tool

Several variants – see below

- Industry-proven high-quality tool and parts – Swiss made for reliability, durability and lowest cost of ownership over the t...
- Very strong – tension force up to 4500N
- Battery + charger
- High-grade friction weld seal
- Strap thickness: 0.4 – 1.2 mm
- Strap width: from 9mm to 19 mm
- Improved performance offers up 800 cycles per charge



Price & details

### VARIANTS · STRAP WIDTH

**110130** BXT3-13: 9-13mm

**110140** BXT3-16: 12-16mm

**110150** BXT3-19: 15-19 mm

### TECHNICAL DATA

| Strapping tool               | BXT3-13              | BXT3-16              | BXT3-19              |
|------------------------------|----------------------|----------------------|----------------------|
| Operation mode               | auto / semi / manual | auto / semi / manual | auto / semi / manual |
| Variable tension speed range | 0 – 290 mm / s       | 0 – 220 mm / s       | 0 – 120 mm / s       |
| Weight (incl. battery)       | 3,6 kg               | 3,8 kg               | 4,3 kg               |
| Relative humidity            | up 90%               | up 90%               | up 90%               |
| Battery / charger            | BXT3-13              | BXT3-16              | BXT3-19              |
| Charger type                 | Bosch                | Bosch                | Bosch                |
| Battery charger voltage      | 100 or 110 or 230 V  | 100 or 110 ok 230 V  | 100 ok 110 ok 230 V  |
| Charging time                | 15-30 min            | 15-30 min            | 25-35 min            |

## ARGON 10-16mm (3/8"-5/8") Battery Strapping Tool for PET/PP strap + Battery + Charger

Art. no. **110160**



Price & details



- ARGON battery strapping tool for plastic strap for PET/PP strap width 10-16mm
- Digital LED liquid crystal display
- Plastic strap width 10-16mm, thickness 0,5-1,2mm
- Battery capacity : 4000 mAH 50/60HZ 75W, can perform up to 700 straps per charge
- Automatic, semi-automatic and manual mode
- Adjustable tension force: 400-3800N
- ARGON battery strapping tool for plastic strap + battery + charger

### TECHNICAL DATA

|                            |                                           |                          |                                         |
|----------------------------|-------------------------------------------|--------------------------|-----------------------------------------|
| Colour                     | Red                                       | Applicable strap width   | 10-16mm                                 |
| Applicable strap thickness | 0.6-1.2mm                                 | Rechargeable battery     | Lithium battery 18V/5.0Ah               |
| Charging time              | A 90-minute charge can perform 700 straps | Charger (Optional)       | Voltage 110/220V                        |
| Battery weight             | 0.6kg                                     | Applicable strap type    | PP/PET                                  |
| Maximum tension force (N)  | 4000N                                     | Tensioning speed (m/min) | 11m/min                                 |
| Welding time (s)           | 1.1-1.4s                                  | Cooling time(en)         | 2.5 s (adjustable)                      |
| Control system             | Button + Digital display                  | Mode selection           | Fully automatic, semi-automatic, manual |



## Strapping Tool Battery Powered ARGON PLUS 13-19mm for PET/PP Strap

Art. no. 110170



Price & details



- Adjustable operating mode: automatic , semi-automatic, manual
- Powered by a long-life battery enabling up to 500 straps per charge
- Strap type: PP/PET
- Strap width: 13mm – 19mm / 0,4mm – 1,2mm
- Tension force: 400 – 4200 N adjustable
- Tensioning speed: 100 – 200 mm/s
- Sealing strength: approx. 75% of plastic straps

### TECHNICAL DATA

|              |         |                |                                   |
|--------------|---------|----------------|-----------------------------------|
| Power source | Battery | Operating mode | Automatic, Semi-automatic, Manual |
| Strap type   | PP/PET  | Joint type     | Friction weld seal                |

## Cordless strapping tool ITI 71 for 16-40mm textile/composite strap – 2x Battery & Charger

Art. no. 111001




Price & details



- Battery strapping tool for 16-40mm textile/composite strap ITI 71 – 2x battery & charger
- Straps up to 40mm wide corded and textile strap with ease
- Adjustable tension for secure strapping up to 11,000 N
- Integrated cutting unit for neat results
- Durable aluminum cast body
- Fast 40-minute battery recharge
- Quick 6.5 mt/m tensioning speed

### TECHNICAL DATA

|                      |                                                                |                         |                                                       |
|----------------------|----------------------------------------------------------------|-------------------------|-------------------------------------------------------|
| Dimensions           | 400 x 135 x 190 mm                                             | Weight (with battery)   | 5 kg (11 lbs)                                         |
| Power Supply         | Battery – Li-Ion, 18V, 5Ah                                     | Battery Performance     | 2x batteries and a charger are included with the tool |
| – Number of Cycles   | Approx. 400 cycles (varies based on factors like tension an... | – Battery Recharge Time | Approx. 40 minutes                                    |
| – Max. Tension Force | 11,000 N                                                       | – Tensioning Speed      | 6.5 meters per minute                                 |
| – Sealing            | Not applicable                                                 | – Joint Strength        | Not applicable                                        |
| – Type               | Textile (Woven & Composite)                                    | – Width Range           | 16 mm to 40 mm                                        |
| – Thickness Range    | 0.5 mm to 1.5 mm                                               |                         |                                                       |

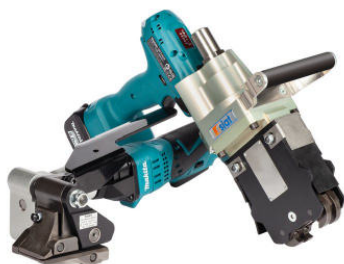

## ELECTRA™ M SERIES battery powered Tensioner and Sealer for Steel Strapping

Art. no. **112001**



Price & details

- Tensioner and Sealer for Steel Strapping ELECTRA™ M SERIES
- Battery-operated, versatile solution for steel strapping tensioning and sealing
- Tensions up to 7500 N
- Suits 19mm, 25mm, and 32mm widths steel strap
- Quick 3m/min tension speed, efficient for various strapping applications
- A lightweight – weight only 5 kg with a battery
- Compact design ensures easy handling and maneuverability

### TECHNICAL DATA

|                            |                                                                |                          |                                                                |
|----------------------------|----------------------------------------------------------------|--------------------------|----------------------------------------------------------------|
| Manufacturer               | SIAT                                                           | Application              | Tensioning and double-notch sealing steel strapping for reg... |
| Compatibility              | Works with steel strapping widths: 19 mm, 25 mm, 32 mm Stra... | Strapping Tension        | Up to 7500 N                                                   |
| Tension Speed              | 3 meters per minute (10 feet per minute)                       | Dimensions (L x W x H)   | 490 mm x 134 mm x 165 mm (19.2" x 5.3" x 6.5")                 |
| Weight (with Battery)      | 5 kg (11 lbs)                                                  | Battery Type             | Lithium-ion battery from Makita                                |
| Battery Voltage / Capacity | 18 V / 3 Ah                                                    | Battery Charging Time    | Fully charged in 20 minutes                                    |
| Battery Power              | 44 Wh                                                          | Battery Charge Indicator | Yes                                                            |

## AKU-STEEL DUO Battery-powered strapping tool and tensioner for 19-32mm steel strap

Art. no. **112004**



Price & details



- Battery-powered tool for industrial steel strapping, 19-32mm wide straps.
- Handles steel straps 0.8-1.2mm thick for robust, durable bundling.
- Offers tensioning and sealing functionalities for complete strapping cycles.
- Rapid charge time: Only 50-60 minutes, ensuring minimal downtime.
- Cycles per charge: Sealer performs  $\geq 1200$ ; tensioner performs  $\geq 220$ .
- Provides tension stress: Sealer  $\geq 16.8\text{kN}$ ; tensioner  $\geq 6\text{kN}$ .
- Weight: Lightweight sealer 3.9kg; ergonomic tensioner 4.8kg.

### VARIANTS · STRAP WIDTH

**112004** 19mm

**112005** 25mm

**112006** 32mm



### AIR DUO32 pneumatic steel strap tensioner and sealer

Several variants – see below

- Steel Strap Width: 19-32mm
- Steel Strap Thickness: 0.8-1.2mm
- Tension Force:  $\geq 16.8$  KN
- Easy to use , lightweight, high safety performance
- The high degree of automation , convenient to move , suitable for all kinds of fields and all kinds of package sizes
- The body and parts of the item are made of high-strength alloy, high durability
- High tensioning force results in high connection reliability



Price & details

#### VARIANTS · STRAP WIDTH

**120450** 19mm

**120451** 25mm

**120452** 32mm

#### TECHNICAL DATA

|                       |                                                         |                   |                                  |
|-----------------------|---------------------------------------------------------|-------------------|----------------------------------|
| Model No.             | <b>AIR DUO32 pneumatic steel tensioner &amp; sealer</b> | Steel Strap Width | <b>19-32mm</b>                   |
| Steel Strap Thickness | <b>0.8-1.2mm</b>                                        | Air Pressure      | <b>0.4-0.6Mpa</b>                |
| Seal Type             | <b>Single Strapping Buckles</b>                         | Tension Force     | <b><math>\geq 16.8</math> KN</b> |
| Weight                | <b>5.0 KGS</b>                                          |                   |                                  |



### Pallet threading tool B190cm

Art. no. 123


- Pallet strap feeder is an innovative tool for efficient pallet strapping operations
- 1900mm highly flexible fiber rod for smooth threading
- Durable polyurethane clip to hold straps securely
- Ergonomic design for standing operation, reducing strain
- Compatible with PP, PET straps up to 25mm width, 1.5mm thickness
- Lightweight construction for ease of handling
- Curved head design prevents straps from getting stuck



Price & details

#### TECHNICAL DATA

|                  |                                      |                     |                           |
|------------------|--------------------------------------|---------------------|---------------------------|
| Dimension        | 190 cm × 4.3 cm × 6.8 cm (L × H × W) | Gross Weight        | 570 g                     |
| Net Weight       | 185 g                                | Clip Head Dimension | 12.8 cm × 4.3 cm × 6.8 cm |
| Carton Dimension | 75 cm × 41 cm × 5.5 cm               | Rod Material        | Highly flexible fiber rod |
| Clip Material    | Durable and flexible polyurethane    |                     |                           |

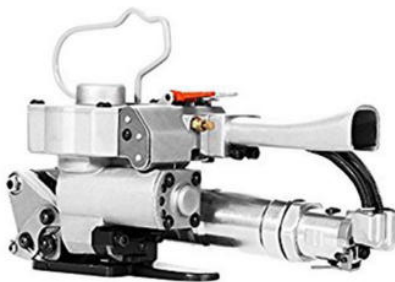

### AIR19 Pneumatic Strapping Tool 13-19mm (1/2" to 3/4") Banding Tool for plastic PET and PP strap

Art. no. 130010

- Pneumatically powered, very reliable and maintenance-friendly
- Ergonomic – perfectly balanced in all directions
- This tool is ideal for a wide variety of vertical and horizontal strapping positions,
- Lightweight
- For 13-19mm (1/2" to 3/4") wide polyester (PET) and polypropylene (PP) straps



Price & details

#### TECHNICAL DATA

|                 |                                                                |                            |                                  |
|-----------------|----------------------------------------------------------------|----------------------------|----------------------------------|
| Usage           | AIR19 pneumatic strapping tool 13-19mm (1/2" to 3/4") batte... | Size of the strapping tool | 280x160x180 mm (11" x 6.3" x 7") |
| Weight          | 3.82 Kg                                                        | Strap width                | from 13-19mm (1/2" to 3/4")      |
| Strap thickness | 0.5 – 1.2 mm                                                   | Appy straps                | PET and PP strap                 |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: 3500N (786lbs)      |
| Air pressure    | 0.5-0.8 MPa                                                    |                            |                                  |



## AIR Metal 19-32mm (3/4" – 1 1/2") – Pneumatic steel strapping tool with seal joint

Several variants – see below

- Air pressure: 0.35-0.6Mpa
- Straps specification: (19-32) × (0.8-1.2) mm
- Steel strip tension speed: 5.3 m/min
- Tension force: ≥9.8 KN/0.6Mpa
- Easy to operate
- The ergonomic design makes it easy to maneuver when suspended, helping to reduce operator fatigue. The simple one-lever oper...
- Simple to maintain



Price & details

### VARIANTS · STRAP WIDTH:

**130040** : 32mm

**130041** : 16-19mm

### TECHNICAL DATA

|                      |                        |                           |             |
|----------------------|------------------------|---------------------------|-------------|
| Apply straps         | Steel strip            | Air pressure              | 0.35-0.6Mpa |
| Straps specification | (19-32) × (0.8-1.2) mm | Steel strip tension speed | 5.3 m/min   |
| Tension force        | ≥9.8 KN/0.6Mpa         | Machine weight            | 4.5 kg      |



## Manual strapping tool PPST-13/16 for PP strap 12/13mm and 15/16mm

Art. no. **140010**

- One of the most quality manual strapping tools for PP strapping,
- Lightweight,
- 3 in 1 solution (tensioning strap + deformation buckle + cut the strap),
- PP strap 12-13mm and PP strap 15-16mm



Price & details

### TECHNICAL DATA

|                  |                                                      |                |                             |
|------------------|------------------------------------------------------|----------------|-----------------------------|
| Function devices | Tensioning strap + deformation buckle, cut the strap | Type of strap  | PP – polypropylene          |
| Strap width      | 12-13 mm, 15-16mm                                    | Type of buckle | metal – 12-13 mm or 15-16mm |
| Weight           | 2,75 kg                                              |                |                             |



## BO-51 Manual sealless steel strapping tools 13-20mm

Art. no. **140100**

- If you're looking for a high-quality and reliable solution for strapping, the BO-51 Manual Sealless Steel Strapping Tools ar...
- Designed for professional use, these tools are suitable for strapping steel bands with a width of 13-20mm, making them versa...
- Built to last, the BO-51 Manual Sealless Steel Strapping Tools are made from durable materials, ensuring long-lasting perfor...



Price & details

### TECHNICAL DATA

|                       |                                                                |              |                     |
|-----------------------|----------------------------------------------------------------|--------------|---------------------|
| Function              | It has the features of no external power required, no faste... | Thickness    | 0.38-0.6mm          |
| Apply straps          | Steel strip                                                    | Padlock form | Yin and yang buckle |
| Weight                | 3.9 kg                                                         | Size         | 387×168×308mm       |
| Maximum tension force | Steel strip on the maximum tension between 70% and 80%         |              |                     |



## A3 sealless steel strapping tool 13-19mm

Art. no. **140110**


- Strapping width: 12.7-19mm
- Strapping thickness: 0.38-0.58mm
- For steel strap
- Tensile strengths ranging: 700-850N/mm<sup>2</sup>/100,000-123,000psi
- All the engine body and components of this steel strapping are made of high-strength alloy material
- The sealless combination tool features non-buckle design for saving cost , no need to use another steel buckle
- This manual tensioner comes with high connection reliability, no fasteners, a double power structure, and can easily complet...



Price & details

### TECHNICAL DATA

|                       |                                                                |              |                     |
|-----------------------|----------------------------------------------------------------|--------------|---------------------|
| Function              | It has the features of no external power required, no faste... | Thickness    | 0.38-0.7mm          |
| Apply straps          | Steel strip                                                    | Padlock form | Yin and yang buckle |
| Weight                | 3.9 kg                                                         | Size         | 387×168×308mm       |
| Maximum tension force | Steel strip on the maximum tension between 70% and 80%         |              |                     |

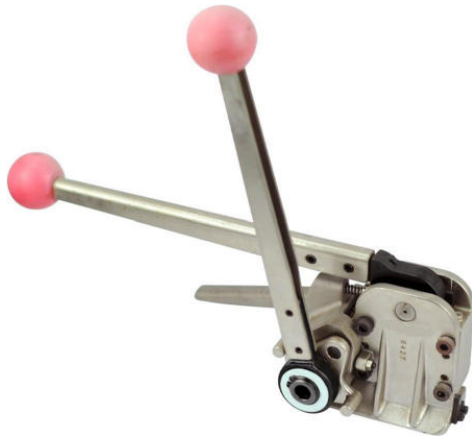

## A4 sealless steel strapping tool 25-32mm – Buckle-free

Art. no. **140112**

- A4 Sealless Steel Strapping Tool 25-32mm ensures high performance
- Eliminates steel buckles for reduced material costs
- Weighs only 4.2kg for easy handling during extended use
- Compatible with 25mm to 32mm wide steel straps
- Fits strap thickness from 0.55mm to 0.75mm
- Maximum tension 8000N secures heavy loads reliably
- Joint strength reaches 80-85% of strap's tensile strength



Price & details

### TECHNICAL DATA

|         |                                       |            |                                          |
|---------|---------------------------------------|------------|------------------------------------------|
| Type    | sealless steel strapping tool, manual | Strap      | steel, 25–32 mm wide, 0.55–0.75 mm thick |
| Tension | up to about 8000 N                    | Joint      | sealless, 80–85 % of the strap strength  |
| Weight  | 4.2 kg                                | Dimensions | 40 × 10 × 33 cm                          |
| Package | 54 × 16 × 23.5 cm, 5 kg               |            |                                          |



## Manual strapping tool for textile & composite/corded strap – 13-50 mm

Several variants – see below

- Manual strapping tool for textile & composite/corded strap for different textile & composite/corded strap width.



Price & details

### VARIANTS • SELECT WIDTH

**140200** 13-19mm

**140201** 19-25mm

**140202** 25-50mm

### TECHNICAL DATA

WIDTH 13-19mm 19-25mm 25-50mm



03



**Polyester strapping kit NEO 9-16mm  
PET/PP incl. Battery & Charger + PET strap  
15.5mm – strapping cart**

Art. no. **120010**

- Battery strapping tool NEO 9-16mm PET/PP
- Lithium battery DC14.4V, 6000MAH ) and a charger
- PET strap 15.5mm x 0.9mm
- Dispenser cart for PP or PET strap



Price & details



### Strapping tool kit NEO 9-16mm PET/PP incl. Battery & Charger + PP strap 15.5mm – strapping cart

Art. no. 120011

- Battery strapping tool NEO 9-16mm PET/PP
- Lithium battery DC14.4V, 6000MAH ) and a charger
- PP strap 15.5mm x 0.7mm
- Dispenser cart for PP or PET strap



Price & details



### PET Strapping Starter Kit NEO2 9-16mm PET/PP incl. Battery & Charger + PET strap – strapping cart

Several variants – see below

- Polyester strapping kit NEO2 battery powered PET PP strapping system
- Supports PET straps from 9 mm to 16 mm
- Electronically controlled tension for consistent load securing
- Friction weld sealing without metal seals
- Maximum tension up to 3200 N
- Lithium ion battery up to 600 cycles per charge
- Fast charging approximately 45 to 60 minutes



Price & details

#### VARIANTS · STRAP WIDTH

**120014** 15.5×0.9mm/406/1250m

**120015** 15.5×0.7mm/406/1750m

**120016** 12×0,6mm/406/2500m

#### TECHNICAL DATA

|                              |                                                                |                        |                                              |
|------------------------------|----------------------------------------------------------------|------------------------|----------------------------------------------|
| System Type                  | Battery-powered polyester strapping kit with mobile dispens... | Strapping Tool Model   | NEO2 9-16mm PET battery strapping tool       |
| Tool Dimensions (L × W × H)  | 315 mm × 140 mm × 120 mm                                       | Tool Weight            | 2.8 kg (tool only); approx. 620 g (battery)  |
| Strap Material Compatibility | PET polyester strapping                                        | Supported Strap Widths | 9 mm to 16 mm                                |
| Strap Thickness Range        | 0.5 mm to 1.2 mm                                               | Battery Type           | Lithium-ion rechargeable battery (DC 14.4 V) |
| Battery Capacity             | 5000 mAh (approx.) / ~6000 mAh specification depending on k... | Battery Performance    | Up to 600 strapping cycles per charge        |



### Cordless PP strapping kit NEO2 9-16mm incl. Battery & Charger + PP strap – strapping cart

Several variants – see below

- Polyester strapping kit NEO2 complete mobile PET and PP strapping system
- Supports strap widths 9–16 mm for flexible industrial applications
- Battery powered strapping tool with automatic tension sealing cutting
- Electronic tension control for consistent and repeatable joint quality
- Friction weld sealing ensures reliable load securing
- Rechargeable lithium ion battery with dedicated charger included
- Includes PP plastic strap suitable for daily industrial use



Price & details

#### VARIANTS · STRAP WIDTH

**120017** 12×0,8mm/406mm – 2000m

**120018** 15×0,8mm/406mm – 1800m

#### TECHNICAL DATA

|            |                                                 |             |                                              |
|------------|-------------------------------------------------|-------------|----------------------------------------------|
| Kit        | NEO2 tool, battery, charger, PP strapping, cart | Tool        | NEO2 battery strapping tool, brushless motor |
| Strap type | PET and PP                                      | Strap width | 9–16 mm                                      |
| Tension    | up to 3200 N, adjustable                        | Seal        | friction weld                                |
| Cycle      | fully automatic: tension, weld, cut             | Battery     | 18 V / 5000 mAh lithium                      |
| Charger    | included, one battery included                  | Tool weight | 3.9 kg                                       |
| Cart       | mobile, for the coil and the tool               | Warranty    | 12 months, service in the EU                 |



### Battery PET Strapping Kit GT-ONE 10-16mm (3/8"- 5/8") – Battery & Charger – PET strap 12mm or 15,5mm – dispenser cart

Several variants – see below

- GT-ONE 10-16mm (3/8"- 5/8") Single button operation in automatic mode Can be set up to 2750 N (620 lbs) Quality Bosch Brushl...
- Single button operation in automatic mode
- Can be set up to 2750 N (620 lbs)
- Quality Bosch Brushless Motor
- Digital display with always visible parameters
- Easy to use and simple to adjust
- 12-month Warranty , fast free Shipping inside EU



Price & details

#### VARIANTS · SELECT WIDTH

**120020** 15,5×0,7mm/1750m

**120021** 12×0,6mm/2000m

#### TECHNICAL DATA

|                 |                                                                |                            |                                      |
|-----------------|----------------------------------------------------------------|----------------------------|--------------------------------------|
| Usage           | Battery strapping tool GT ONE 10-16mm al sorts of industrie... | Size of the strapping tool | L320mm × D100mm × H160mm             |
| Weight          | 3.7 Kg (inc. battery)                                          | Strap width                | from 10-16mm (3/8" to 5/8")          |
| Strap thickness | 0.5 – 1.1 mm                                                   | Appy straps                | PET and PP strap                     |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: 2750N / Soft Mode: 500N |
| Battery         | Battery Akku Power SP3 14.4 Vdc – 4.0 Ah Li-Ion                | Charger                    | 220V                                 |
| Charging time   | 30 minutes – 200/400 strapping                                 |                            |                                      |



### PP Banding Kit | GT-ONE 10-16mm (3/8"- 5/8") – Battery & Charger – PP strap 12mm or 15.5mm – dispenser cart

Several variants – see below

- In battery strapping set for packing with PP strap is included: GT-ONE 10-16mm (3/8"- 5/8") & Battery & Charger & PP strap 1...
- Single button operation in automatic mode
- Can be set up to 2750 N (620 lbs)
- Quality Bosch Brushless Motor
- Digital display with always visible parameters
- Easy to use and simple to adjust
- 12-month Warranty , fast free Shipping inside EU



Price & details

#### VARIANTS · SELECT WIDTH

**120022** 15,5 x 0,7 mm/2000m

**120023** 12 x 0,8 mm/2000m

#### TECHNICAL DATA

WIDTH 12 x 0,8mm/2000m 15,5 x 0,7mm/2000m



### Battery strapping set TES PRO 12-16mm incl. 2xBattery & Charger + PET strap – strapping cart

Art. no. **120034**

- Battery strapping set TES PRO for PET strapping 12–16 mm
- Battery powered strapping tool with electronic tension control
- Friction weld sealing system for consistent joint strength
- Includes two lithium ion batteries for continuous operation
- Fast battery charging with dedicated intelligent charger
- PET polyester strap with controlled elongation
- Suitable for medium and heavy palletized loads



Price & details

#### VARIANTS · STRAP WIDTH

**120032** 15.5×0.7mm/406mm – 1750m

**120033** 12×0,6mm/406mm – 2500m

**120034** 15.5×0.9mm/406mm – 1250m/600kg

#### TECHNICAL DATA

|                    |                           |                       |                                  |
|--------------------|---------------------------|-----------------------|----------------------------------|
| Strap Type         | PET Polyester Strap       | Supported Strap Width | 12–16 mm                         |
| Strap Thickness    | 0.6–1.0 mm                | Tensioning System     | Electronic Motor-Controlled      |
| Sealing Method     | Friction Weld Seal        | Power Supply          | Rechargeable Lithium-Ion Battery |
| Included Batteries | 2x Rechargeable Batteries | Operation Mode        | Automatic / Semi-Automatic       |
| Mobility           | Strapping Cart            |                       |                                  |



### Battery Strapping Set | TES Plus 16-19mm (5/8" to 6/8") – 2 Batteries & Charger – PET strap 15,5mm or 19mm – PET/PP dispenser cart



Price &amp; details

[Several variants – see below](#)

- High-quality battery strapping tool TES Plus 15,5-19mm (5/8" to 6/8") Adjustable tension force: 400N-5000N high-grade fricti...
- Adjustable tension force: 400N-5000N
- high-grade friction weld seal
- for PET and PP pallet strapping
- Two Batteries & Charger 14.4V Li-ion battery for up to 220 seals
- 14.4V Li-ion battery for up to 220 seals
- PET polyester strap 15,5mm or 19mm (Ø406mm) – 1 unit

#### VARIANTS · SELECT WIDTH

**120040** 19×1,0mm/1000m**120041** 15,5×0,7mm/1750m

#### TECHNICAL DATA

|       |                                 |
|-------|---------------------------------|
| WIDTH | 15,5×0,7mm/1750m 19×1,0mm/1000m |
|-------|---------------------------------|



### Battery Operated PET Strapping Kit MB620 12-16mm – Battery & Charger – PET strap 12mm or 15.5mm – PET/PP dispenser cart



Price &amp; details

[Several variants – see below](#)

- High-quality battery strapping tool MB620 12-16mm (1/2" - 5/8") Automatic welding – Digital display Super light for PET and P...
- Automatic welding – Digital display
- Super light
- for PET and PP pallet strapping
- Battery & Charger
- PET polyester strap 12mm or 15.5mm – 1 unit – Ø406mm
- Cart Dispenser suitable for PP/PET strap

#### VARIANTS · SELECT WIDTH

**120050** 15,5 × 0,7mm/1750m**120051** 12 × 0,6mm/2000m

#### TECHNICAL DATA

|                 |                                                                |                            |                                          |
|-----------------|----------------------------------------------------------------|----------------------------|------------------------------------------|
| Usage           | Messersi MB620 battery hand tool 12-16mm (1/2" to 5/8") bat... | Size of the strapping tool | 330x150x130 mm                           |
| Weight          | 3.4 Kg (inc. battery)                                          | Strap width                | from 12-16mm (1/2" to 5/8")              |
| Strap thickness | 0.65 – 1.0 mm                                                  | Appy straps                | PET and PP strap                         |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: from 10N – 2500N (9-900lbs) |
| Battery         | Battery 14,8 V /2,0 A Li-Po complies with UN28.3 requiremen... | Charger                    | 220V                                     |
| Charging time   | 15-30 minutes – up to 400 strappings                           |                            |                                          |



### Battery Strapping kit | MB620 12-16mm (1/2"- 5/8") – Battery & Charger – PP strap 12mm or 16mm – dispenser cart

Several variants – see below

- High-quality battery strapping tool MB620 12-16mm (1/2"- 5/8") Full Touch Display Super light for PET and PP pallet strapping
- Full Touch Display
- Super light
- for PET and PP pallet strapping
- Battery & Charger
- PP polypropylene strap 12mm or 16mm – 1 unit
- Cart Dispenser suitable for PP/PET strap



Price & details

#### VARIANTS · SELECT WIDTH

**120052** 15,5 x 0,7mm/2000m

**120053** 12 x 0,8mm/2000m

#### TECHNICAL DATA

|                 |                                                                |                            |                                          |
|-----------------|----------------------------------------------------------------|----------------------------|------------------------------------------|
| Usage           | Messersi MB620 battery hand tool 12-16mm (1/2" to 5/8") bat... | Size of the strapping tool | 330x150x130 mm                           |
| Weight          | 3,4 Kg (inc. battery)                                          | Strap width                | from 12-16mm (1/2" to 5/8")              |
| Strap thickness | 0.65 – 1.0 mm                                                  | Apply straps               | PET and PP strap                         |
| Seal            | high-grade friction weld seal, vibration welding (heating b... | Maximum tension force      | Max Tension: from 10N – 2500N (9-900lbs) |
| Battery         | Battery 14,8 V /2,0 A Li-Po complies with UN28.3 requiremen... | Charger                    | 220V                                     |
| Charging time   | 15-30 minutes – up to 400 strappings                           |                            |                                          |



### Plastic Banding Kit ARGON 10-16mm PET/PP incl. Battery & Charger + PET strap 12mm – strapping cart

Art. no. 120060

- Battery Powered Strapping Tool ARGON 10-16mm (3/8"-5/8") for PET/PP Strap
- Lithium battery 18V/5.0Ah and a charger
- PET strap 12mm x 0.6mm
- Dispenser cart for PP or PET strap



Price & details



### PP strapping kit with battery tool and cart ARGON 10-16mm PET/PP incl. Battery & Charger + PP strap 12mm

Art. no. 120061

- Battery Powered Strapping Tool ARGON 10-16mm (3/8"-5/8") for PET/PP Strap
- Lithium battery 18V/5.0Ah and a charger
- PP strap 12mm x 0.8mm
- Dispenser cart for PP or PET strap



Price & details



### Pallet banding kit JET 12-16 mm PET/PP incl. Battery & Charger + PET strap 12 mm – strapping cart

Art. no. 120120

- Battery Powered Strapping Tool JET 12-16 mm (1/2"-5/8") for PET/PP Strap
- Lithium battery (DC14.4V, 3000MaH, 10C) and a charger
- PET strap 12 mm x 0.6 mm
- Dispenser cart for PP or PET strap



Price & details



### Plastic banding kit JET 12-16 mm PET/PP incl. Battery & Charger + PP strap 12 mm – strapping cart

Art. no. **120121**

- Battery Powered Strapping Tool JET 12-16 mm (1/2"-5/8") for PET/PP Strap
- Lithium battery (DC14.4V, 3000MaH, 10C) and a charger
- PP strap 12 mm x 0.6 mm
- Dispenser cart for PP or PET strap



Price & details



### Pneumatic banding kit AIR19 13-19 mm PET/PP + PET strap 15,5mm – strapping cart

Art. no. **120400**

- Pneumatic strapping tool AIR19 13-19mm PET/PP
- PET strap 15.5mm x 0.7mm
- Dispenser cart for PP or PET strap



Price & details



### Poly banding kit PPST13 + PP strap 12mm – seals – strapping cart

Art. no. 120500

- Manual strapping tool PPST13 for 12mm PP Strap
- Seals 12 mm (1000 units)
- PP strap 12 mm x 0.8 mm / 2000m
- Dispenser cart for PP or PET strap



Price & details



### Strapping banding kit PPST16 + PP strap 15,5 mm – seals – strapping cart

Art. no. 120510

- Manual strapping tool PPST16 for 15,5 mm PP Strap
- Seals 15,5 mm (800 units)
- PP strap 15,5 mm x 0.7 mm / 1800m
- Dispenser cart for PP or PET strap



Price & details



**Cord strapping kit – Manual strapping tool  
CORD 13-19 mm – 2 units composite strap  
16 mm – strapping cart**

Art. no. **120800**

- Manual strapping tool CORD 13-19 mm
- Cord, composite strap 16mm/600m
- Dispenser cart for textile/composite/cord strap



Price & details



04



**PET straps 12 x 0.6mm/406 – 2500m – strength 310kg – flooded – 91 units**

Art. no. **00003**

- We are offering 91 units of flooded PET strap at a discounted price.
- While these straps have been exposed to flooding, they remain functional and may be suitable for various industrial applicat...



Price & details



## PET strap – 12mm or 15,5mm, 19mm, 25mm or 32mm

Several variants – see below

- High-quality polyester strapping for secure and reliable packaging
- All PET bands have inner diameter Ø406mm
- PET straps: 12 x 0.6mm/406 – 2500m – strength 310kg
- Polyester straps: 15.5 x 0.7mm/406/1750m – strength 440kg
- Polyester straps: 15.5 x 0.9mm/406/1250m – strength 540kg
- PET polyester straps: 19 x 1.0mm/406/1000m – strength 820kg
- Polyester straps: 25 x 1.2mm/406/600m – strength 1260kg



Price & details

### VARIANTS · SELECT WIDTH

**550100** 12×0,6mm/2500m

**550120** 19×1,0mm/1000m

**550110** 15,5×0,7mm/1750m

**550140** 25×1,2mm/600m

**550111** 15,5×0,9mm/1250m

**550150** 32×1,2mm/500m



## PET strap 12-32 mm pallet – 60 units

Several variants – see below

- PET strap 12 x 0,6mm/406 – 2500m – strength 310kg
- PET polyester strap 15.5 x 0.7mm/406/1750m – strength 440kg
- Polyester strap 15,5 x 0,9mm/406/1250m – strength 540kg
- PET polyester strap 19 x 1,0mm/406/1000m – strength 820kg
- Polyester strap 25 x 1,2mm/406/600m – strength 1260kg
- Cost savings : Buying a whole pallet of PET straps typically results in a lower cost per unit
- Cheap transport per unit



Price & details

### VARIANTS · DIMENSIONS:

**550100\_01** : 12 x 0,6mm/406mm – 2500m/310kg

**550120\_01** : 19 x 1,0mm/406/1000m/820kg

**550110\_01** : 15.5 x 0.7mm/406mm – 1750m/440...

**550140\_01** : 25 x 1,2mm/406mm – 600m/1260kg

**550111\_01** : 15,5 x 0,9mm/406mm – 1250m/540...

**550150\_01** : 32 x 1,2mm/406mm – 500m/1600kg



## Plastic PP polypropylene strap – 12mm or 15,5mm

Several variants – see below

- We are selling three different widths of PP straps.
- The core of 406 mm in diameter.



Price & details

### VARIANTS • SELECT WIDTH

**550206** 12×0,55mm/3000m

**550208** 12×0,8mm/2000m

**550210** 15,5×0,7mm/2000m



## Textile strap for waste bales 16mm – 340m – 4 units

Art. no. **550301**

- High-quality textile strap for connecting waste bales
- Each package contains 4 units (4 x 340 meters) of the textile strap
- 16 mm in width and 340 meters per roll
- Can be simply tied with your hands
- Durable and reliable, made from top-quality materials
- The outer diameter of 180 mm and an inner diameter of 140 mm
- Suitable for household, commercial, and industrial waste management



Price & details

### TECHNICAL DATA

|                |                                           |                 |                                                                |
|----------------|-------------------------------------------|-----------------|----------------------------------------------------------------|
| Width          | 16mm                                      | Length          | 340 meters per roll                                            |
| Outer diameter | 180mm                                     | Inner diameter  | 140mm                                                          |
| Material       | Top-quality textile                       | Strength        | Durable and reliable                                           |
| Versatility    | Suitable for a wide range of applications | Ease of use     | Can be simply tied with your hands                             |
| Quantity       | 4 units in one package (4 x 340 meters)   | Recommended use | Securing and connecting waste bales                            |
| Benefits       | Strong, durable, and easy to use.         | Applications    | Ideal for household, commercial, and industrial waste manag... |



## Woven Polyester Strap 16mm or 19mm – Ø76mm

Several variants – see below

- Unlike steel, the textile strap is safer to use
- Costs are lower
- Do not damage the tied goods
- They can withstand high tension and have high absorption power
- We can print on them
- Are easier to carry
- They are more resistant to chemical and weather influences (do not rust or rot)



Price & details

### VARIANTS · WIDTH

**550310\_02** 2 × 16mm/850m – Ø76mm

**550330\_02** 2 × 19mm/600m – Ø76mm



## Cord strap 13 – 32 mm – 54 units – pallet

Several variants – see below

- We offer various types of Cord Strap: 13mm, 16mm, 19mm, 25mm, and 32mm
- Strength: from 485kg to 2360kg
- Cost-effective : Buying cord straps in bulk is a cost-effective option for customers because it results in lower per-unit co...
- Cheap shipping cost of cord strap per unit : Shipping costs per unit are significantly lower than when buying small quanti...
- The best solution for heavy cargo and safe transportation
- The composite strap is cost-effective compared to the steel strap
- Reusable for multiple shipments, reducing costs over time



Price & details

### VARIANTS · WIDTH:

**550390\_01** : 13mm – 1100m/485kg

**550420\_01** : 25mm – 500m/1280kg

**550400\_01** : 16mm – 850m/680kg

**550430\_01** : 32mm – 250m/2360kg

**550410\_01** : 19mm – 500m/800kg



## Cord strapping WG 13mm, 16mm, 19mm, 25mm or 32mm – Ø200mm – 2 units (1box)

Several variants – see below

- Cord strap variables include 13mm, 16mm, 19mm, 25mm, and 32mm
- Strength ranges from 485kg to 2360kg
- Minimum order quantity of cord strap is 2 units
- All cord straps have inner diameter Ø200mm
- Bulk purchasing for lower per-unit costs
- Reduced shipping costs for larger quantities
- Ideal for heavy cargo and safe transportation



Price & details

### VARIANTS · SELECT WIDTH

**550390\_02** 2x WGC 13mm/1100m

**550420\_02** 2x WGC 25mm/500m

**550400\_02** 2x WGC 16mm/850m

**550430\_02** 2x WGC 32mm/250m

**550410\_02** 2x WGC 19mm/500m

### TECHNICAL DATA

| Product Name       | Width (mm) | Length (m) | Strength (kg) | Inner Diameter (mm) |
|--------------------|------------|------------|---------------|---------------------|
| Cord WG strap 13mm | 13mm       | 1100m      | 485kg         | Ø200mm              |
| Cord WG strap 16mm | 16mm       | 850m       | 680kg         | Ø200mm              |
| Cord WG strap 19mm | 19mm       | 500m       | 800kg         | Ø200mm              |
| Cord WG strap 25mm | 25mm       | 500m       | 1280kg        | Ø200mm              |
| Cord WG strap 32mm | 32mm       | 250m       | 2360kg        | Ø200mm              |



## 12mm OPP strapping band for automatic strapping machine – 150m/unit – 100 pieces

Art. no. **550680\_01**

- Strong 12mm OPP band for auto-strapping – secure bundling
- Reliable adhesion, damage-free – perfect for various products
- Fits ECOBAND-S 12mm machine – efficient and easy loading
- Elegant packaging – enhances product presentation
- Versatile use – carton sealing, retail packaging, and more
- Durable and long-lasting – 150m per roll
- User-friendly – reduces downtime, increases productivity



Price & details

### TECHNICAL DATA

|                             |                                                                     |                          |                                                                       |
|-----------------------------|---------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------|
| Width                       | <b>12mm</b>                                                         | Thickness                | <b>0.12mm</b>                                                         |
| Length per Unit             | <b>150 meters</b>                                                   | Tape Roll Inner Diameter | <b>40mm</b>                                                           |
| Tape Roll Exterior Diameter | <b>160mm</b>                                                        | Material                 | <b>OPP Film</b>                                                       |
| Packing                     | <b>Elegant OPP packing</b>                                          | Bundling Effect          | <b>Strong</b>                                                         |
| Suitable for                | <b>Automatic Banding Machines, Many kinds of strapping machines</b> | Uses                     | <b>Product bundling, Carton sealing, Gift wrapping, Office use...</b> |



### OPP banding tape 30 mm – 150 m – inner diameter of roll 40 mm – 40 pieces

Art. no. **550682\_01**

- OPP tape 30 mm – 150 m – inner diameter of roll 40 mm – 40 pieces is designed as a standardized consumable for industrial bu...
- OPP tape is widely used in automated and semi-automated bundling machines as well as in manual packaging environments where...
- This product configuration is intended for professional users who require predictable performance across repetitive packagin...



Price & details

#### TECHNICAL DATA

|                    |                                 |                     |                                      |
|--------------------|---------------------------------|---------------------|--------------------------------------|
| Product Type       | OPP tape                        | Tape Width          | 30 mm                                |
| Roll Length        | 150 m                           | Inner Core Diameter | 40 mm                                |
| Material           | Oriented Polypropylene Film     | Application Method  | Bundling Machine or Manual Dispenser |
| Packaging Quantity | 40 rolls per carton             | Color               | Transparent or Light Neutral         |
| Typical Use        | Industrial Bundling and Sealing |                     |                                      |



### 30mm Paper band for Automatic Banding Machine – 150m – 56 units

Art. no. **550685\_01**

- 30mm Paper band for Automatic Banding Machine – 150m/unit
- 56 units in box
- Versatile 30mm width, 0.12mm thickness for secure bundling
- Durable kraft paper (80 g/m<sup>2</sup>) with PE-coating for strength
- Tear-resistant, reliable hold during transit and storage
- Compatible with 40mm inner diameter roll spindles
- Smooth, quiet processing with automatic banding machines



Price & details

#### TECHNICAL DATA

|                        |                                                                |                          |                                          |
|------------------------|----------------------------------------------------------------|--------------------------|------------------------------------------|
| Width                  | 30mm                                                           | Thickness                | 0.12mm                                   |
| Length                 | 150 meters                                                     | Tape Roll Inner Diameter | 40mm                                     |
| Exterior Roll Diameter | 180mm                                                          | Colour                   | White, Unprinted                         |
| Material               | Kraft Paper 80 g/m <sup>2</sup>                                | Coating                  | PE-Coated                                |
| Application            | Bundling or banding small items such as brochures, books, d... | Compatibility            | Suitable for Automatic Banding Machines  |
| Tear Resistance        | Easy to tear/open at the right angle                           | Environmental Impact     | Environmentally friendly and sustainable |



## Paper band 12 mm – 150 m – inner diameter of roll 40 mm – 100 pieces

Art. no. **550690\_01**



Price & details

- Paper band 12 mm width for uniform and controlled bundling
- 150 m roll length reduces frequent roll replacements
- 40 mm inner core compatible with the ECOBAND-S automatic banding machine
- Paper material suitable for recyclable packaging systems
- Light to medium-duty bundling applications
- Runs in the ECOBAND-S automatic banding machine, which seals the band by heat
- Consistent thickness ensures stable tension control

### TECHNICAL DATA


|                     |                                                 |                      |                                    |
|---------------------|-------------------------------------------------|----------------------|------------------------------------|
| Band width          | 12 mm                                           | Band length per roll | 150 m                              |
| Inner core diameter | 40 mm                                           | Material             | Industrial paper                   |
| Color               | Natural brown                                   | Packaging unit       | 100 rolls per carton               |
| Application type    | Runs in the ECOBAND-S automatic banding machine | Recyclability        | 100 percent paper recycling stream |

## Steel strap 16mm, 19mm, 25mm or 32mm – 25kg – Coated – painted

Several variants – see below



Price & details

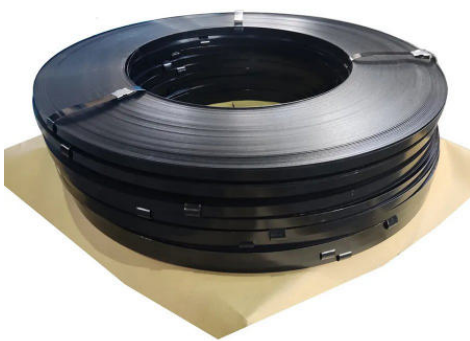

- Steel strap 16 x 0.5mm – 25kg
- Fast Delivery
- Minimal order quantity: 2 units
- Quantity discount – the more you buy, the cheaper its gets
- Superior strength for heavy loads
- Temperature-resistant and secure packaging solution
- Durable, long-lasting performance

### VARIANTS · WIDTH

**550700** 16×0,5mm  
**550731** 32×1,0mm

**550711** 19×0,5mm

**550720** 25×0,8mm



## Steel strap 16mm, 19mm, 25mm or 32mm – 1000kg – Coated – painted – 40 units – pallet

Several variants – see below



Price & details

- Steel strap 16–32mm industrial solution
- Total load capacity 1000kg per pallet
- 40 steel strap coils per pallet
- Available widths 16mm 19mm 25mm 32mm
- Steel thickness 0.5mm high durability
- Tensile strength up to 800 MPa
- Internal diameter 406mm coil core

### VARIANTS · STRAP WIDTH:

**550700\_01** : 16×0,5mm  
**550731\_01** : 32×1,0mm

**550711\_01** : 19×0,5mm

**550720\_01** : 25×0,8mm

### TECHNICAL DATA

| Advantages of Steel Strap      | Plastic Strap (PET/PP)         | Cord Strap                     | Textile Strap                  |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Superior strength and durab... | May not have the same level... | May not have the same level... | May not have the same level... |
| High resistance to tension...  | May have lower resistance t... | May have lower resistance t... | May have lower resistance t... |
| Excellent performance in ex... | Resistant to weather, but m... | Resistant to weather, but m... | Resistant to weather, but m... |
| Reusable and cost-effective... | May not be as reusable or c... | May not be as reusable or c... | May not be as reusable or c... |
| Provides a secure and relia... | Suitable for medium-duty ap... | Suitable for light to mediu... | Suitable for light to mediu... |



## Steel strap for binding 16mm, 19mm, 25mm or 32mm – 250 kg – 10 units

Several variants – see below



Price & details

- Steel strap for binding 16 mm, 19 mm, 25 mm or 32 mm industrial load securing solution
- Multiple strap widths ensure stable load edge contact
- 0.5 mm thickness provides high rigidity and controlled tensioning
- 25 kg roll weight supports long continuous strapping cycles
- Supplied as 10 rolls with total 250 kg pallet unit
- Compatible with manual steel strapping tools
- Designed for heavy-duty loads and sharp-edged products

### VARIANTS · STRAP WIDTH

**550700\_02** 16×0,5mm  
**550731\_02** 32×1,0mm

**550711\_02** 19×0,5mm

**550720\_02** 25×0,8mm

### TECHNICAL DATA

|                      |                                                          |                  |                                                                |
|----------------------|----------------------------------------------------------|------------------|----------------------------------------------------------------|
| Product Type         | Steel strapping for industrial binding and load securing | Keyword          | Steel strap                                                    |
| Strap Width          | 16 mm, 19 mm, 25mm or 32 mm                              | Strap Thickness  | 0.5 mm                                                         |
| Roll Weight          | 25 kg per roll                                           | Package Quantity | 10 rolls                                                       |
| Total Package Weight | 250 kg                                                   | Typical Use      | Bundling, pallet securing, reinforcement, heavy-duty packag... |
| Compatibility        | Compatible with common steel strapping tools and seals   |                  |                                                                |



### Dispenser cart for PET/PP strap – 405/406mm

Art. no. **660010**

- High-quality dispenser cart
- Suitable for PET and PP strap 405mm, 406mm,
- Card dispenser dimensions: 550\*400\*1050 mm
- Toolbox dimensions: 370\*200\*100 mm
- Weight of a card dispenser for strapping: 17 kg
- Inner diameter: 400 mm
- Loaded weight: up to 50 kg



Price & details

#### TECHNICAL DATA

|               |                                           |                         |                                         |
|---------------|-------------------------------------------|-------------------------|-----------------------------------------|
| Dimension     | 550 x 400 x 1050 mm                       | Tool Box Size           | 370 x 200 x 100 mm                      |
| Weight        | 17kg                                      | Suitable Inner Diameter | 400mm                                   |
| Loaded Weight | 50kg                                      | Suitable Strapping      | PP/Composite (ID 200mm), PET (ID 400mm) |
| Type of Strap | PET – polyethylene, PP – polypropylene    | Strap Width Range       | 10-19mm                                 |
| Apply Range   | The inner diameter 405/406mm PET/PP strap |                         |                                         |



### Textile Strap Dispenser Cart Ø76mm

Art. no. **660020**

- Dispenser cart for textile bands with Ø76 mm inner diameter
- Lightweight and made of high-quality steel
- Holds up to 20 kg of strap
- Diameter Compatibility: Ø76mm
- Material: Steel
- Dimensions: 350 x 350 x 450 mm
- Weight: 3.5 kg



Price & details



## Dispenser Cart for Steel strap HS5

Art. no. **660030**

- Dispenser Cart for Steel strap HS5
- Efficiently handle steel strapping with ease and boost productivity
- Sturdy construction ensures durability in demanding industrial environments
- Ergonomic handle and wheels for comfortable operation and enhanced mobility
- Easy loading and dispensing of ribbon-style steel strapping for convenience
- Provides organized storage , keeping strapping materials readily accessible
- Controlled dispensing minimizes the risk of accidents and injuries



Price & details

### TECHNICAL DATA

|                            |                                 |                 |                                                                |
|----------------------------|---------------------------------|-----------------|----------------------------------------------------------------|
| Steel strap dispenser cart | HS5                             | Tool Size       | 1020mm x 680mm x 310mm                                         |
| Weight                     | 15 kg                           | Loaded Weight   | 50 kg                                                          |
| Suitable Strapping         | Ribbon Steel Strapping          | Material        | Steel                                                          |
| Construction               | Sturdy and durable              | Handle          | Ergonomic design                                               |
| Wheels                     | Mobility-enhancing              | Application     | Industrial packaging                                           |
| Compatibility              | Steel strapping materials       | Safety Features | Controlled dispensing                                          |
| Usage                      | Bundling, securing, reinforcing | Benefits        | Efficient handling, improved safety, enhanced mobility, org... |



## Dispenser Cart for Cord/PP band HC2 – Ø200mm

Art. no. **660050**

- Dispenser Cart for Composite Band with an inner diameter of Ø200mm
- Steel construction for durability
- Designed for use with composite, cord, or any other band that fits on an inner diameter of Ø200mm
- Diameter: Ø200mm
- Smooth rotation system for even unwinding
- Storage Tray : Equipped with a storage tray for tools and accessories
- Handle: Provides easy maneuverability



Price & details

### TECHNICAL DATA

|                         |                                                                |                    |                                                     |
|-------------------------|----------------------------------------------------------------|--------------------|-----------------------------------------------------|
| Material                | Heavy-duty construction for durability                         | Band Compatibility | Designed for use with cord bands                    |
| Suitable Inner Diameter | Ø200 mm                                                        | Loaded Weight      | 50 kg                                               |
| Rotation System         | Smooth rotation system for even unwinding                      | Braking Mechanism  | Included for precise tension control                |
| Storage Tray            | Equipped with a storage tray for tools and accessories         | Handle             | Provides easy maneuverability                       |
| Application             | Professional use in warehouses, distribution centers, manuf... | Dimensions         | 550 x 400 x 1050 mm                                 |
| Toolbox Dimensions      | 370 x 200 x 100 mm                                             | Suitable Straps    | PP/Composite strap with an inner diameter of 200 mm |
| Weight                  | 6 kg                                                           |                    |                                                     |



## Seals for plastic PP strapping 13mm or 16mm

Several variants – see below

- Material: Steel
- Galvanized
- Application: Designed for use with 12–13 mm or 15–16 mm plastic PP strapping . Manual or tool-assisted application for secur...
- Seals width : 13 mm (1000 pcs/sales unit) , and 16 mm (1000 pcs/sales unit)
- Quantity : Typically sold in packs or boxes. MOQ: 2 boxes
- Compatibility : Compatible with plastic PP strapping of 12–13 mm or 15–16 mm width.
- Dimensions : Dimensions may vary depending on the specific type of seal, clip, or clamp



Price & details

### VARIANTS · SELECT WIDTH

**660300** 13mm/1000

**660311** 16mm/1000



## Wire buckles, clips, clamps for textile/composite strapping 16 mm, 19 mm, 25 mm or 32 mm

Several variants – see below

- Wire buckles Clips Clamps galvanized for textile composite strapping
- Supports strap widths 16 mm 19 mm 25 mm
- Galvanized steel ensures corrosion resistance in industrial environments
- Defined wire diameters 3.5 mm 4 mm 5 mm
- Compatible with manual and pneumatic tensioning tools
- Bulk packaging 1000 pcs box optimized for professional procurement
- Pallet quantities up to 80000 pcs support high volume operations



Price & details

### VARIANTS · SELECT WIDTH

**660320** 16mm/1000units

**660328** 32mm/250units

**660324** 19mm/1000units

**660326** 25mm/500units

### TECHNICAL DATA

| Parameter         | 16 mm Version | 19 mm Version | 25 mm Version |
|-------------------|---------------|---------------|---------------|
| Strap Width       | 16 mm         | 19 mm         | 25 mm         |
| Wire Diameter     | 3.5 mm        | 4.0 mm        | 5.0 mm        |
| Seal Type         | Galvanized    | Galvanized    | Galvanized    |
| Pieces per Box    | 1000 pcs      | 1000 pcs      | 500 pcs       |
| Pieces per Pallet | 80000 pcs     | 60000 pcs     | 24000 pcs     |



## Steel strap clips 16x40mm – for manual strapping – 1000 pieces

Art. no. **660390**

- Steel strap clips 16x40mm for manual steel strapping operations
- Compatible with 16 mm steel strapping systems
- Manufactured from high-strength steel for reliable sealing
- Designed for manual tensioners and sealers
- Provides secure mechanical joint after deformation
- Suitable for heavy and rigid industrial loads
- Single-use consumable for consistent performance



Price & details

### TECHNICAL DATA

|                        |                                        |                     |                                    |
|------------------------|----------------------------------------|---------------------|------------------------------------|
| Product type           | Steel strap clips for manual strapping | Clip dimensions     | 16 x 40 mm                         |
| Compatible strap width | 16 mm steel strapping                  | Material            | High-strength steel                |
| Application method     | Manual sealing with steel strap sealer | Packaging unit      | 1,000 pieces                       |
| Usage type             | Single-use industrial consumable       | Typical environment | Industrial, logistics, warehousing |

## Clips for steel strapping for pneumatic strapping – 16-32 mm

Several variants – see below

- Clips for steel strapping for pneumatic strapping for Industrial Load Securing
- Compatible With Pneumatic Steel Strapping Tools
- Available Sizes 16x40 Mm 19x57 Mm 25x57 Mm 32x57 Mm
- Manufactured From High-Strength Carbon Steel
- Designed For High Tension Steel Strapping Applications
- Secure Mechanical Sealing After Pneumatic Tensioning
- Optimized For Consistent Joint Strength And Reliability



Price & details



### VARIANTS · WIDTH

**660395** 16x40mm – 1000 units  
**660420** 32x57mm – 800 units

**660400** 19x57mm – 1000 units

**660410** 25x57mm – 1000 units

### TECHNICAL DATA

|               |                                               |                 |                                |
|---------------|-----------------------------------------------|-----------------|--------------------------------|
| Sizes         | 16 × 40, 19 × 57, 25 × 57, 32 × 57 mm         | For strap width | 16, 19, 25 and 32 mm           |
| Material      | high-strength carbon steel                    | Tools           | pneumatic tensioner and sealer |
| Joint         | crimped, one clip per joint                   | Use             | single use                     |
| Typical loads | steel, castings, coils, pipes, timber, bricks |                 |                                |



### Paper Strap 9-15mm

Several variants – see below

- Paper strapping band for bundling and banding
- Widths 9, 12 and 15 mm
- Biodegradable and recyclable with the carton
- For light and medium loads
- On coils for banding machines
- 12 mm coil: 150 m, core 40 mm, 0.12 mm thick
- Not for friction-weld PP machines



Price & details

#### VARIANTS · WIDTH:

– : 15mm

– : 12mm

– : 9mm

#### TECHNICAL DATA

|                          |                                                       |             |                                                    |
|--------------------------|-------------------------------------------------------|-------------|----------------------------------------------------|
| Widths                   | 9, 12 and 15 mm                                       | Material    | paper, biodegradable and recyclable                |
| Load range               | light and medium                                      | Supplied as | coils for banding machines                         |
| Coil, 12 mm in our range | 150 m, core 40 mm, up to 160 mm across, 0.12 mm thick | Closing     | banding machine, or seal and crimping tool by hand |
| Not suitable for         | friction-weld machines for PP strap                   | Moisture    | loses strength when wet                            |



### Automatic strapping machine – AUTOMA for PP strap 11-12 mm, thickness- 0.6-1.0 mm frame 1000x800mm

Art. no. **210012**



Price & details

- AUTOMA Affordable Automatic Strapping Machine for PP strap 11-12mm
- Up to 30 strappings per minute ,
- For packing with PP strap 11-12 mm
- Arch is standard size : width 800mm X height 600mm
- The tension range can be adjustable between 0-90kg
- Easy operation, easy maintenance
- Table height: 750mm

#### TECHNICAL DATA

|                           |                                                                |                     |                                                                 |
|---------------------------|----------------------------------------------------------------|---------------------|-----------------------------------------------------------------|
| Power source              | 220V 50/60HZ 1.0kW 10A                                         | Packing speed       | ≤28-30path/min                                                  |
| Strapping force           | 0-90kg (adjustable)                                            | Supporting value    | 80kgs                                                           |
| Hot-adhering position     | bottom                                                         | Table height        | 750mm (It's possible to customize the height)                   |
| Arch                      | 1. standard size: width 800mm X height 600mm 2. material: a... | Applicable PP strap | width(9-12)mm, thickness(0.6~1.0)mm stretching resistance: M... |
| Applicable PP strap spool | W:160mm inner dia.:200mm ~ 210mm, out dia.:400mm ~ 500mm       | Packing type        | parallel strapping manual operation, continual packing, bal...  |
| Product size              | Min: W 80 mm x H 80 mm                                         | Package size        | L (200- ∞) W(≤750)H(≤500) mm                                    |



## HIPO PRO XS Automatic strapping machine – PP strap 5-6mm – 650W x 500H mm

Art. no. **210030**



Price & details

- HIPO PRO XS Automatic strapping machine with high speed 50 straps
- Minimum package size 80\*60mm
- Maximum package size: anything that passes through the 650 x 500 mm arch
- Supports PP straps 5 mm and 6 mm width range
- Adjustable tension strength up to 45 kg for secure loads
- Hot melt adhesion with 90 percent sealing surface
- Standard arch size 650 x 500 mm customizable as needed

### TECHNICAL DATA

|                      |                                  |                        |                                       |
|----------------------|----------------------------------|------------------------|---------------------------------------|
| Power Supply         | AC 220V, 50/60Hz, 1 Phase        | Power Consumption      | 0.6 kW (4A)                           |
| Strapping Speed      | ≤ 50 straps per minute           | Minimum package size   | 80*60mm                               |
| Maximum package size | within the arch (650 x 500 mm)   | Tension Range          | 0 – 45 kg                             |
| Strap Width          | 5 mm and 6 mm polypropylene (PP) | Hot-Adhering Position  | Bottom, ≥90% adhesion surface         |
| Worktable Height     | 850 mm                           | Arch Size              | 650 x 500 mm (can also be customized) |
| Machine Dimensions   | L1170 x W585 x H1450 mm          | Net Weight             | 180 kg                                |
| Noise Level          | ≤ 75 dB(A)                       | Environment Conditions | 0–40 °C, humidity ≤ 90%               |



## HIPO PRO High speed Automatic Strapping Machine 5-12mm

Several variants – see below



Price & details

- Up to 50 strappings per minute ,
- For PP strap, 5-12 mm
- Tension range can be adjustable between 0-45kg.
- Easy operation, easy maintenance
- Mechanical voltage regulation
- Fixed castors with brake
- Reliable PC board control

### VARIANTS · SELECT WIDTH

**210043** 5-6mm

**210045** 8-9mm

**210046** 11-12mm

### TECHNICAL DATA

|       |                     |
|-------|---------------------|
| WIDTH | 5-6mm 8-9mm 11-12mm |
|-------|---------------------|



## HIPO ULTRA – auto strapping machine – PP strap 5-6mm – 1050W x 800H mm

Art. no. **210048**



Price & details

- Fully automatic strapping machine for cartons, boxes and bundles
- Arch 1050 × 800 mm inside, built to our order
- Up to 75 straps per minute, tension 0–45 kg
- PP strap 5 or 6 mm, 0.5–0.8 mm thick, hot-melt bottom seal
- Working table adjustable 850–950 mm, packs up to 80 kg
- PLC, rotating touch screen and DC brushless motor
- Manual, automatic (table sensor) and foot-switch operation

### TECHNICAL DATA

|                              |                                                         |                           |                                                               |
|------------------------------|---------------------------------------------------------|---------------------------|---------------------------------------------------------------|
| Type                         | Fully automatic strapping machine                       | Strapping speed           | Up to 75 straps per minute                                    |
| Tension range                | 0–45 kg, adjustable on the touch screen                 | Applicable strap          | PP, 5 mm or 6 mm width (specified with the order), 0.5–0.8... |
| Strap coil                   | core I.D. 200–210 mm, O.D. 400–450 mm, width 170–190 mm | Arch size (W × H, inside) | 1050 × 800 mm, built to order                                 |
| Sealing method               | Hot-melt sealing at the bottom                          | Sealing efficiency        | Sealed area ≥ 90%, seal position deviation ≤ 2 mm             |
| Worktable height             | 850–950 mm, adjustable                                  | Maximum package weight    | 80 kg                                                         |
| Minimum package size (W × H) | 100 × 60 mm                                             | Operating modes           | Manual (button or foot switch), automatic (table sensor)      |



## Automatic strapping machine with conveyor belt – HIPO ULTRA-B, 220V, for PP strap width 5-6mm, thickness- 0.5-0.8 mm, frame – width 850mm, height 800mm

Art. no. **210048B**



Price & details

- Automatic strapping machine with a conveyor for cartons, boxes and bundles
- Arch 850 × 800 mm inside, built to our order
- Up to 50 straps per minute, tension 0–30 kg
- PP strap 5 or 6 mm, 0.5–0.8 mm thick, hot-melt seal under the package
- Automatic mode with a sensor, or convey mode without strapping
- PLC with a touch screen: cycle counter, alarms, feed and cooling times
- Worktable 850 mm, packages up to 80 kg

### TECHNICAL DATA

|                  |                                                         |                           |                                                                |
|------------------|---------------------------------------------------------|---------------------------|----------------------------------------------------------------|
| Type             | Automatic strapping machine with a conveyor             | Strapping speed           | Up to 50 straps per minute                                     |
| Tension range    | 0–30 kg, adjustable on the touch screen                 | Applicable strap          | PP, 5 mm or 6 mm width (specified with the order), 0.5–0.8...  |
| Strap coil       | core I.D. 200–210 mm, O.D. 400–450 mm, width 175–190 mm | Arch size (W × H, inside) | 850 × 800 mm, built to order; manufacturer's standard 650 ×... |
| Sealing method   | Hot-melt sealing at the bottom                          | Sealing efficiency        | Sealed area ≥ 90%, seal position deviation ≤ 2 mm              |
| Worktable height | 850 mm                                                  | Maximum package weight    | 80 kg                                                          |



## HIPO Semi-automatic Strapping Machine 5-15mm (3/16" to 9/16") Banding Machine for plastic PP strap

Art. no. **210060**



Price & details

- Standard accessory, its advantage is stable quality , and durability
- The length, width and height of the package shouldn't be less than 120mm
- Small volume to save space
- Non-fast heater plate, it will increase the work efficiency
- Adjustable and durable
- With wheels
- For 5-15mm (3/16" to 9/16") wide polypropylene (PP) straps

### TECHNICAL DATA

|                               |                                                                   |                                       |                              |
|-------------------------------|-------------------------------------------------------------------|---------------------------------------|------------------------------|
| Usage                         | HIPO semi-automatic strapping machine<br>5-15mm (3/16" to 9/16... | Size of the strapping<br>machine (mm) | L840 W550 H730               |
| Weight                        | 60 Kg                                                             | Power supply                          | 220V/50/60Hz 1PH 0.25Kw      |
| Minimal product<br>dimensions | Length, Width, and Height must be<br>bigger than 120mm            | Strap width                           | from 5-15mm (3/16" to 9/16") |
| Strap thickness               | 0.5 – 0.8 mm                                                      | Apply straps                          | PP strap                     |
| Seal                          | high-grade friction weld seal, vibration<br>welding (heating b... | Maximum tension force                 | Max Tension: 3-45 Kg         |
| Applicable Strap Spool        | 210mm*178mm                                                       |                                       |                              |



## HIPO BOX Semi-automatic Strapping Machine PP strap 5-15mm

Art. no. **210070**



Price & details

- The semi-automatic machine is characterized by a better operator panel and an advanced heating tongue.

### TECHNICAL DATA

|                           |                         |                            |                                  |
|---------------------------|-------------------------|----------------------------|----------------------------------|
| Power supply              | 220V/50/60Hz 1PH 0.25Kw | Packing speed              | ≤3second/strap                   |
| Tension Range             | 3-45Kg                  | Hot-adhering Position      | Bottom                           |
| Working Table Height      | 760mm                   | Applicable PP Strap        | width:5-15mm thickness:0.5-0.8mm |
| Applicable Strap Spool    | 210mm*178mm             | Control System             | PC board control                 |
| Machine<br>Dimensions(mm) | L755 W540 H760          | Packing<br>Measurement(mm) | L780 W570 H900                   |
| Machine Weight(kg)        | N.W:60/G.W:67           |                            |                                  |



## Automatic Horizontal Strapping Machine HAMMER for PP or PET tape 9-15mm

Art. no. **210080**

- Automatic horizontal strapping machine for tall pallet loads
- The load stays in place – the arch travels up and down the uprights
- PP or PET strap 9–15 mm , 0.55–1.0 mm thick, heat-sealed at the side
- Up to 15 s per strap , tension adjustable 0–90 kg
- Arch 1500 × 1500 mm , other sizes built to order
- Loads L 500–1500 × W 1000–1500 × H 800–2500 mm
- Siemens PLC and touch screen; manual, automatic and continuous modes



Price & details

### TECHNICAL DATA

|                    |                                                         |                  |                                                                |
|--------------------|---------------------------------------------------------|------------------|----------------------------------------------------------------|
| Type               | Fully automatic horizontal strapping machine            | Strapping mode   | Horizontal, 1 to several straps per load                       |
| Operating modes    | Manual, automatic, continuous                           | Power supply     | 380 V, 50/60 Hz, 3-phase, 3.1 kW, 8 A                          |
| Air supply         | 0.4–0.6 MPa                                             | Cycle time       | ≤ 15 seconds per strap                                         |
| Tension range      | 0–90 kg, adjustable                                     | Applicable strap | PP or PET, 9–15 mm width (specified with the order), 0.55–1... |
| Strap coil         | core I.D. 200–210 mm, O.D. 400–500 mm, width 160–190 mm | Sealing method   | Heat sealing at the side                                       |
| Sealing efficiency | Sealed area ≥ 90%, seal position deviation ≤ 2 mm       | Arch size        | 1500 × 1500 mm inside; other sizes built to order              |
| Arch material      | Aluminium alloy                                         | Strapping size   | L 500–1500 × W 1000–1500 × H 800–2500 mm                       |



## ARCUS automatic pallet strapping machine for PET/PP tape 11-12 mm – 0.55-1.0 mm/FI-200 mm – Tension force: 0-90 kg – Arc size: W1500×H2200 mm

Art. no. **210090**

- ARCUS automatic pallet strapping machine with PLC control system
- Operates on 380 V / 50 Hz / 1550 W power
- Cycle time ≤ 15 seconds for each strapping operation
- Delivers adjustable tension up to 90 kg for secure loads
- Uses PP or PET strap 11–12 mm wide , 0.55–1.0 mm thick
- Features photoelectric detection for automatic pallet positioning
- Constructed with aluminum alloy frame for long-term durability



Price & details

### TECHNICAL DATA

|                   |                                                        |                       |                                                        |
|-------------------|--------------------------------------------------------|-----------------------|--------------------------------------------------------|
| Power Supply      | 380 V / 50 Hz / 1550 W / 4 A                           | Cycle Time            | ≤ 15 seconds per strap                                 |
| Tension Range     | 0 – 90 kg adjustable                                   | Strap Type            | PP or PET strap, 11–12 mm width, 0.55–1.0 mm thickness |
| Strapping Mode    | Parallel strapping; photoelectric or manual initiation | Machine Dimensions    | 3890 × 640 × 2200 mm                                   |
| Arch (Frame) Size | 1500 × 2200 mm                                         | Net Weight            | 350 kg                                                 |
| Noise Emission    | ≤ 75 dB                                                | Operating Temperature | 0 – 40 °C                                              |
| Relative Humidity | ≤ 98 % (non-condensing)                                | Structure             | Aluminum alloy chassis; low-maintenance design         |



## COMBO Pallet Semi-automatic Strapping Machine PET/PP strap 9-16mm

Several variants – see below

- Can be used with plastic PP strap (or PET strap on request)
- ISO certificate and required quality certificate
- The minimum pallet height that the semi-automatic strapping machine can still connect is 650mm
- time savings – increased packing productivity and direct savings on costs of clips
- The tensile strength is adjustable from 5 to 150kg.
- Packing speed: ≤3second/strap



Price & details

### VARIANTS · STRAP

**220010** PET 12 mm Ø406

**220011** PET 15,5 mm Ø406

**220020** PP 12 mm Ø200

### TECHNICAL DATA

|                         |                                                                |                        |                                           |
|-------------------------|----------------------------------------------------------------|------------------------|-------------------------------------------|
| Power supply            | 1Phase/220V/50/60Hz 0.6Kw                                      | Packing speed          | ≤3second/strap                            |
| Tension Range           | 5-150Kgs                                                       | Sword                  | L1000mm                                   |
| Hot-adhering Position   | Side                                                           | Packaging Height Range | 650mm-∞                                   |
| Applicable Strap        | PP or PET width:9, 10, 12, 13, 15, 16mm – specify which mod... | Applicable Strap Spool | PP 210mm*178mm PET 406*150mm (on request) |
| Control System          | PC board control                                               | Machine Dimensions(mm) | L1073 W550 H1670                          |
| Packing Measurement(mm) | L1200 W580 H1680                                               | Machine Weight(kg)     | N.W:140/G.W:180                           |



## ECOBAND-S Paper & OPP banding machine 12mm

Art. no. **250010**

- Interactive Touch Screen to simplify adjustments
- Automatic induction packaging and foot switch packaging
- The packing speed is 26 passes/min
- Tightening strength is adjustable to ensure the tightening is appropriate and not loose – Adjustable binding force up to 5kg
- Arch size of the paper banding machine is 220 x 170 mm
- Can be used with OPP tape and a paper strap



Price & details

### TECHNICAL DATA

|                        |                        |                     |                       |
|------------------------|------------------------|---------------------|-----------------------|
| Power supply           | AC110V / 220V, 50-60Hz | Packing speed       | 26 passes/min         |
| Arch size              | 220 x 170 mm           | Binding force       | < = 5kg               |
| Working table height   | 215mm                  | Binding band        | Paper & OPP film tape |
| Bandwidth              | 12mm                   | Coil inner diameter | 40mm                  |
| Coil outer diameter    | 160mm                  | Coil thickness      | 0.12mm                |
| Minimum packing object | 30mm width             | Weight              | Net weight 70 kg      |



## ECOBAND-B4620 Paper & OPP strapping machine 30mm

Art. no. **250021**



Price & details

- A fully automatic Opp Strapping machine is easy and fast to use
- The paper tape, OPP film strap all can be used
- The packing speed is 26 cycles/min
- Adjustable Strapping Tension up to 5kg
- Arch size is W460mm x H200mm
- Max. box size 473mm x 206mm, min box size 30mm x 10mm
- Confirm with CE , with power failure protection

### TECHNICAL DATA

|                      |                                                                  |                     |                                      |
|----------------------|------------------------------------------------------------------|---------------------|--------------------------------------|
| Power source         | AC110-120/200-240V,50/60Hz,1Ph,0.25kW,2.5A                       | Packing speed       | 26 cycles/min                        |
| Strapping Tension    | ≤5kg(adjustable)                                                 | Arch size           | W460mm x H200mm(standard)            |
| Working table height | 245mm                                                            | Suitable band       | Paper /OPP film                      |
| Suitable band width  | standard 30mm<br>(Max. outer dia.<Φ380mm for external dispenser) | Suitable band spool | inner dia.:Φ 40mm,outer dia.:Φ 160mm |
| Shipping size        | L680 × W470 × H1290 mm                                           | Machine size        | L650 × W360 × H1140 mm               |
| Optional             | 1.arch size 2.band size 3.external dispenser                     | Weight              | N.W:85 kg; G.W:100 kg                |



## ECOBAND-A banding machine on a stand for paper or OPP band 20/30 mm – frame 460 × 200 mm

Art. no. **250025**



Price & details

- Automatic banding machine on a stand with castors
- Up to 20 bands a minute , tension up to 5 kg
- Frame 460 × 200 mm , products from 50 mm wide
- Paper or OPP band 20 or 30 mm
- Belt feed and top press
- Working height 600 mm
- Touch screen, 24 V DC control

### TECHNICAL DATA

|                                |                                                                |                       |                                                          |
|--------------------------------|----------------------------------------------------------------|-----------------------|----------------------------------------------------------|
| Type                           | Automatic banding machine on a stand, with belt feed and to... | Band                  | Paper or OPP film                                        |
| Band width                     | 20 mm or 30 mm                                                 | Band thickness        | 0.12 mm                                                  |
| Band roll                      | core 76 mm, outer diameter up to 300 mm                        | Speed                 | up to 20 bands per minute                                |
| Band tension                   | up to 5 kg, adjustable                                         | Frame opening (W × H) | 460 × 200 mm                                             |
| Minimum product width          | 50 mm                                                          | Working height        | 600 mm                                                   |
| Control                        | Touch screen, 24 V DC control voltage, port detection, prod... | Power supply          | 110-120 V or 200-240 V, 50/60 Hz, 1-phase, 0.4 kW, 2.5 A |
| Machine dimensions (L × W × H) | 570 × 750 × 1080 mm                                            | Machine weight        | 110 kg                                                   |



### ASTRA High-speed Automatic Strapping Machine 9-12mm

- ASTRA high-speed automatic banding 9-15 mm features 9–15 mm strap range
- 3 arch options: 600 × 400 mm or 800 × 600 mm or 1000 × 800 mm
- Table height 800 mm aligns with conveyors and workstations
- Accepts 200 mm core diameter coils for standard straps
- Cycle time under 2 seconds for rapid strapping operations
- 220 V single-phase power options
- Adjustable tension dial for precise strapping force control



#### TECHNICAL DATA

|                          |                     |                            |                                                     |
|--------------------------|---------------------|----------------------------|-----------------------------------------------------|
| Strap Width              | 9 mm – 15 mm        | Dimensions (W × L × H)     | 1250 mm × 600 mm × 1510 mm                          |
| Table Height             | 800 mm              | Arch Size                  | 600 × 400 mm, 800 × 600 mm or 1000 × 800 mm (W x H) |
| Weight                   | ca. 185 kg          | Power Supply               | single-phase 220 V/50–60 Hz                         |
| Ampere Rating            | 5 A                 | Core Diameter (Strap Coil) | 200 mm                                              |
| Tension Adjustment Range | Adjustable via dial | Cycle Initiation           | Start button (Blue)                                 |
| Emergency Stop           | Stop button (Red)   |                            |                                                     |



### Ramp for Pallet wrapping machine SMARTWRAP-X

Several variants – see below

- Ramp for SMARTWRAP-X pallet wrapping machine turntables
- Available in 1500mm to 2400mm sizes
- Sturdy and durable material
- Quick and easy pallet loading and unloading with a pallet truck
- Reduces physical strain and saves time
- An essential accessory for businesses using the SMARTWRAP-X machine
- Convenient access for most types of pallet trucks



Price & details

VARIANTS - SIZE

**330009** 1500mm  
**330093** 2000mm

**330091** 1650mm  
**330094** 2200mm

**330092** 1800mm  
**330095** 2400mm

TECHNICAL DATA

|               |                                                                |             |                                                                |
|---------------|----------------------------------------------------------------|-------------|----------------------------------------------------------------|
| Compatibility | SMARTWRAP-X pallet wrapping machine turntables                 | Ramp width  | 1500mm, 1650mm, 1800mm, 2000mm, 2200mm, and 2400mm             |
| Weight        | Approximately 80kg                                             | Material    | Sturdy and durable                                             |
| Benefits      | Improves efficiency and ease of pallet wrapping process, re... | Application | An essential accessory for businesses using SMARTWRAP-X pal... |



## SMARTWRAP X2 Pallet Wrapping Machine | 2000 kg, up to 3000 mm wrapping height

Several variants – see below

- Affordable & low maintenance Stretch wrapping machine
- Easy to use and simple to be adjusted
- Tri-color LED safety indicator , IoT module
- 1500mm turntable, 2000mm packing height, max load weight: 1500KG
- Intelligent touch control with the human-machine delivery system
- Pre-fix film device , high packing efficiency
- A comprehensive safety protection system



Price & details

### VARIANTS · TURNTABLE SIZE / WRAPPING HEIGHT

**330054** 1500mm / 2200mm

**330057** 1650mm / 2200mm

**330060** 1800mm / 2200mm

+ 6 more variants online

**330055** 1500mm / 2600mm

**330058** 1650mm / 2600mm

**330061** 1800mm / 2600mm

**330056** 1500mm / 3000mm

**330059** 1650mm / 3000mm

**330062** 1800mm / 3000mm

### TECHNICAL DATA

|                 |                                                        |                  |                                    |
|-----------------|--------------------------------------------------------|------------------|------------------------------------|
| Brand           | SMARTWRAP                                              | Load weight      | 1500kg (on request 2000kg, 2500kg) |
| Turntable speed | 3-10rpm                                                | Packing speed    | 25-30 loads/h                      |
| Column height   | 2400mm (on request 2800mm/3200mm)                      | Packing height   | 2000mm (on request 2400mm/2800mm)  |
| Turntable size  | 1500mm (on request 1650mm/1800mm/2000mm/2200mm/2400mm) | Turntable height | 86.7mm                             |



## SMARTWRAP X2 PRE-STRETCH Pallet Wrapping Machine | 2000 kg, up to 3000 mm wrapping height

Several variants – see below

- Pallet Wrapper SMARTWRAP X2 PRE-STRETCH is ideal for efficient wrapping of bulk products on a pallet, leveraging high film s...
- 1500mm turntable
- 2200mm packing height
- Max load weight: 2000kg



Price & details

### VARIANTS · TURNTABLE SIZE / WRAPPING HEIGHT

**330054PS** 1500mm / 2200mm

**330057PS** 1650mm / 2200mm

**330060PS** 1800mm / 2200mm

+ 6 more variants online

**330055PS** 1500mm / 2600mm

**330058PS** 1650mm / 2600mm

**330061PS** 1800mm / 2600mm

**330056PS** 1500mm / 3000mm

**330059PS** 1650mm / 3000mm

**330062PS** 1800mm / 3000mm

### TECHNICAL DATA

|                 |                                         |                  |                                          |
|-----------------|-----------------------------------------|------------------|------------------------------------------|
| Brand           | Pallet Wrapper SMARTWRAP X2 PRE-STRETCH | Load weight      | Maximum 2000KG                           |
| Turntable speed | 0-12 RPM/mins                           | Packing height   | Maximum 2200mm (2600mm /3000mm optional) |
| Turntable size  | 1500mm(1650mm/1800mm/2000mm /optional)  | Pre-stretch rate | 250% (up to 350%)                        |



## Pallet Wrapping Machine SMARTWRAP X2 PRE-STRETCH with Scale | 2000 kg, up to 3000 mm wrapping height



Price &amp; details

Several variants – see below

- SMARTWRAP X2 PRE-STRETCH turntable pallet wrapper with integrated scale — weigh and wrap in a single cycle
- Maximum load capacity: 2000 kg for heavy warehouse and production pallets
- Powered pre-stretch film delivery at 250% (max 350%) to cut film consumption
- Packing speed up to 30 loads per hour
- Adjustable turntable 0-12 rpm and film carriage 0-5.9 m/min
- Configurable turntable diameters: 1500, 1650, 1800, 2000 and 2200 mm
- Configurable wrapping heights: 2200, 2600 and 3000 mm

### VARIANTS • TURNTABLE SIZE / WRAPPING HEIGHT

**330054PSW** 1500mm / 2200mm  
**330057PSW** 1650mm / 2200mm  
**330060PSW** 1800mm / 2200mm  
**330063PSW** 2000mm / 2200mm  
**330066PSW** 2200mm / 3000mm

**330055PSW** 1500mm / 2600mm  
**330058PSW** 1650mm / 2600mm  
**330061PSW** 1800mm / 2600mm  
**330064PSW** 2000mm / 2600mm  
**330067PSW** 2200mm / 2200mm

**330056PSW** 1500mm / 3000mm  
**330059PSW** 1650mm / 3000mm  
**330062PSW** 1800mm / 3000mm  
**330065PSW** 2000mm / 3000mm  
**330068PSW** 2200mm / 2600mm

### TECHNICAL DATA

|                 |                                       |                     |                                             |
|-----------------|---------------------------------------|---------------------|---------------------------------------------|
| Type            | Turntable pallet wrapper with a scale | Turntable diameter  | 1500 / 1650 / 1800 / 2000 / 2200 mm         |
| Wrapping height | 2200 / 2600 / 3000 mm                 | Column height       | 2000 mm (2400 or 2800 mm for a higher wrap) |
| Maximum load    | 2000 kg                               | Turntable height    | 81 mm                                       |
| Turntable speed | 0–12 rpm, adjustable                  | Film carriage speed | 0–5.9 m/min, adjustable                     |



## Pre Stretch Pallet Wrapping Machine SMARTWRAP X2 with Scale and Printer | 2000 kg, up to 3000 mm wrapping height



Price &amp; details

Several variants – see below

- SMARTWRAP X2 PRE-STRETCH stretch wrap machine with integrated scale and label printer
- Maximum load capacity 2000 kg for heavy industrial pallets
- Powered pre-stretch film delivery: 250% standard, up to 350% maximum
- Turntable diameter options: 1500, 1650, 1800, 2000, 2200 mm
- Wrapping height options: 2200, 2600, 3000 mm
- Extruded aluminium column (4000 t) with lifetime warranty and double chain lifting
- SICK (Germany) photoelectric height sensor

### VARIANTS • TURNTABLE SIZE / WRAPPING HEIGHT

**330054PSWP** 1500mm / 2200mm  
**330057PSWP** 1650mm / 2200mm  
**330060PSWP** 1800mm / 2200mm  
**330063PSWP** 2000mm / 2200mm  
**330066PSWP** 2200mm / 3000mm

**330055PSWP** 1500mm / 2600mm  
**330058PSWP** 1650mm / 2600mm  
**330061PSWP** 1800mm / 2600mm  
**330064PSWP** 2000mm / 2600mm  
**330067PSWP** 2200mm / 2200mm

**330056PSWP** 1500mm / 3000mm  
**330059PSWP** 1650mm / 3000mm  
**330062PSWP** 1800mm / 3000mm  
**330065PSWP** 2000mm / 3000mm  
**330068PSWP** 2200mm / 2600mm

### TECHNICAL DATA

|                 |                                                           |                     |                                             |
|-----------------|-----------------------------------------------------------|---------------------|---------------------------------------------|
| Type            | Turntable pallet wrapper with a scale and a label printer | Turntable diameter  | 1500 / 1650 / 1800 / 2000 / 2200 mm         |
| Wrapping height | 2200 / 2600 / 3000 mm                                     | Column height       | 2000 mm (2400 or 2800 mm for a higher wrap) |
| Maximum load    | 2000 kg                                                   | Turntable height    | 81 mm                                       |
| Turntable speed | 0–12 rpm, adjustable                                      | Film carriage speed | 0–5.9 m/min, adjustable                     |



## SMARTWRAP X2 Pallet Wrapping Machine with Scale | 2000 kg, up to 3000 mm wrapping height

Several variants – see below



Price & details

- Turntable Size: 1500mm (on request 1650mm, 1800mm, 2000mm, 2200mm)
- Maximum wrapping height: 2200mm (on request 2600mm, 3000mm)
- Maximum wrapping weight: 2000 kg
- Max. wrapping speed: 30 Load /H
- Turntable speed: 3-12RPM/mins
- Efficient and precise wrapping with mechanical resistance film carriage and precise tension adjustments
- Memory function and one-button start for simplified operation

### VARIANTS · TURNTABLE SIZE / WRAPPING HEIGHT

**330054W** 1500mm / 2000mm  
**330057W** 1650mm / 2200mm  
**330060W** 1800mm / 2200mm  
**330063W** 2000mm / 2200mm  
**330066W** 2200mm / 3000mm

**330055W** 1500mm / 2600mm  
**330058W** 1650mm / 2600mm  
**330061W** 1800mm / 2600mm  
**330064W** 2000mm / 2600mm  
**330067W** 2200mm / 2200mm

**330056W** 1500mm / 3000mm  
**330059W** 1650mm / 3000mm  
**330062W** 1800mm / 3000mm  
**330065W** 2000mm / 3000mm  
**330068W** 2200mm / 2600mm

### TECHNICAL DATA

|                         |                                                    |                     |                    |
|-------------------------|----------------------------------------------------|---------------------|--------------------|
| Turntable Size          | 1500mm (on request 1650mm, 1800mm, 2000mm, 2200mm) | Suit For Pallet Siz | 1.2x1m             |
| Max. wrapping Height    | 2200mm (on request 2600mm, 3000mm)                 | Max. Over Top       | 100mm              |
| Maximum wrapping weight | 2000KG                                             | Max. wrapping speed | 30 Load /H         |
| Turntable speed         | 3-12RPM/mins                                       | Pre-stretch rate    | Mechanical stretch |



## SMARTWRAP X2 Stretch Wrapping Machine with Scale and Printer | 2000 kg, up to 3000 mm wrapping height

Several variants – see below



Price & details

- Weigh, wrap and label a pallet in a single cycle with the integrated scale and label printer
- SMARTWRAP X2 stretch wrapping machine with scale for professional dispatch operations
- Maximum load capacity: 2000 kg for heavy and mixed pallets
- Turntable diameter options: 1500, 1650, 1800, 2000 and 2200 mm
- Wrapping height options: 2200, 2600 and 3000 mm
- SICK (Germany) photoelectric height sensor applies film only where needed

### VARIANTS · TURNTABLE SIZE / WRAPPING HEIGHT

**330054WP** 1500mm / 2200mm  
**330057WP** 1650mm / 2200mm  
**330060WP** 1800mm / 2200mm  
+ 6 more variants online

**330055WP** 1500mm / 2600mm  
**330058WP** 1650mm / 2600mm  
**330061WP** 1800mm / 2600mm

**330056WP** 1500mm / 3000mm  
**330059WP** 1650mm / 3000mm  
**330062WP** 1800mm / 3000mm

### TECHNICAL DATA

|                 |                                                           |                     |                                             |
|-----------------|-----------------------------------------------------------|---------------------|---------------------------------------------|
| Type            | Turntable pallet wrapper with a scale and a label printer | Turntable diameter  | 1500 / 1650 / 1800 / 2000 / 2200 mm         |
| Wrapping height | 2200 / 2600 / 3000 mm                                     | Column height       | 2000 mm (2400 or 2800 mm for a higher wrap) |
| Maximum load    | 2000 kg                                                   | Turntable height    | 81 mm                                       |
| Turntable speed | 0-12 rpm, adjustable                                      | Film carriage speed | 0-5.9 m/min, adjustable                     |



## Automatic Pallet Wrapping Machine SMARTWRAP X10 PRE-STRETCH with capacity 2000kg

Several variants – see below



Price & details

- Automatic Pallet Wrapping Machine SMARTWRAP X10 for heavy pallets up to 2000 kg
- PRE-STRETCH – uses a pre-stretch rate of up to 300%
- Maximum wrapping height: 2400mm
- Main Features: Remote start machine, Soft start&stop , Intelligent Alarm , Stop at original , Adjustable Speed, Pallet grid...
- Maximum wrapping speed: 30–40 loads/hour
- Automatic cut and clamp film system , eliminating manual intervention
- Pallet Grip System ensures that the film is tightly wrapped, preventing product damage and loss

### VARIANTS · WRAPPING HEIGHT:

**330080** : 2400mm

**330081** : 2700mm

**330082** : 3000mm

### TECHNICAL DATA

|                      |                       |                                      |                                                      |
|----------------------|-----------------------|--------------------------------------|------------------------------------------------------|
| Load size diagonal   | 1753mm                | Maximum wrapping height              | 2400mm (optional 1800mm or 3000m)                    |
| Turntable speed      | 3-12 RPM (adjustable) | Turntable size                       | 1650mm (optional 1800mm or 2000mm)                   |
| Turntable drive      | 1PH                   | Film cut and attaching to the pal... | Automatic                                            |
| Intelli-Sensor       | Standard              | Wrapping speed                       | 30 – 40 load / H (1x1.2x1.8m pallet Warp Two Layers) |
| Standard pre-stretch | 300% pre-stretch      | Wrap force                           | Variable (Electric)                                  |



## Automatic Stretch Wrap Machine SMARTWRAP X20 2000kg

Art. no. **330109**



Price & details

- Powered film carriage with variable speed, placed sidewise.
- Powered pre-stretch 300% with a roping system
- 3All/ system: Automatic clamp and heating-wire cut film
- Initial tail film blower
- Automatic load height detection by photocell
- Soft start/stop frequency inverter with return to start position
- Wrapping cycles counter

### TECHNICAL DATA

|                     |                                                                |                 |                                                                |
|---------------------|----------------------------------------------------------------|-----------------|----------------------------------------------------------------|
| Type                | Fully automatic turntable pallet wrapper                       | Maximum load    | 2000 kg                                                        |
| Turntable           | 1800 mm (2000 mm on request), 3-12 rpm                         | Wrapping height | up to 2350 mm (2800 or 3200 mm on request)                     |
| Speed               | 30–40 pallets per hour                                         | Film delivery   | powered pre-stretch 300 % (up to 380 %)                        |
| Film carriage speed | 1.5–5.5 m/min                                                  | Film            | 500 mm wide (750 mm on request), 12–35 micron, roll up to 2... |
| Film handling       | automatic clamping and hot-wire cutting; pallet grip system... | Programs        | at least 10, adjustable wrapping force                         |
| Height measuring    | automatic, photocell                                           | Pallet grip     | included                                                       |
| Control             | X-LINE 7-inch touch screen, remote control, SIEMENS PLC and... | Alarm light     | LED: blue ready, green working, red alarm                      |



## Automatic Pallet Stretch Wrapper EASY-IN

Art. no. **330300**

- M-type turnplate – pallet can be placed on with hand pallet truck
- Takes less space – ramp is NOT needed
- Capacity: 1000 kg
- Max pallet height: 2000 mm
- Diameter of turntable:  $\Phi$  1500 mm
- Pallet wrapper height: 2400mm
- Soft start/stop



Price & details

### TECHNICAL DATA

|                           |                                                          |                                 |                           |
|---------------------------|----------------------------------------------------------|---------------------------------|---------------------------|
| Power Voltage             | 1 P AC 220/110V 50/60 Hz                                 | Speed of turntable              | 0 ~ 10r/min               |
| Dia.of turntable          | $\Phi$ 1500mm                                            | Mast height                     | H2400mm                   |
| Material                  | LLDPE film, width $\leq$ 500mm,out diameter $\leq$ 280mm | Capacity                        | 1000 kg;                  |
| Max wrapping height       | 2000mm                                                   | Lubricant material              | Common lubricating grease |
| Weight of the machine     | 750Kg                                                    | Approximate weight with packing | 850Kg                     |
| Dimensions of the machine | L2800×W1580×H(2000-3000) mm                              | Installed power                 | 1.25 KW                   |
| Electrical protection     | IP54                                                     | Noise                           | $\leq$ 75DB               |



## Pallet Wrapper EASY-IN PRE-STRETCH

Several variants – see below

- PRE-STRETCH functionality will stretch the film, so you will save up to 36% on film
- M-type turnplate: a pallet can be placed on it with a hand pallet truck
- Takes up less space, and the ramp is unnecessary
- Capacity: 1000 kg
- Max pallet height: 2000 mm
- Diameter of turntable: 1500 mm
- Pallet wrapper height: 2400mm



Price & details

### VARIANTS · WRAPPING HEIGHT:

**330400** : 200 cm

**330401** : 240 cm

**330402** : 270 cm

### TECHNICAL DATA

|                           |                                                          |                                 |                           |
|---------------------------|----------------------------------------------------------|---------------------------------|---------------------------|
| Power Voltage             | 1 P AC 220/110V 50/60 Hz                                 | Speed of turntable              | 0 ~ 10r/min               |
| Dia.of turntable          | $\Phi$ 1500mm                                            | Mast height                     | H2400mm                   |
| Material                  | LLDPE film, width $\leq$ 500mm,out diameter $\leq$ 280mm | Capacity                        | 1000 kg;                  |
| Max wrapping height       | 2000mm                                                   | Lubricant material              | Common lubricating grease |
| Weight of the machine     | 750Kg                                                    | Approximate weight with packing | 850Kg                     |
| Dimensions of the machine | L2800×W1580×H(2000-3000) mm                              | Installed power                 | 1.25 KW                   |



## Rotating arm for pallet wrapping SMARTWRAP-RA1000 wrapping height 200cm

Art. no. **330500**



Price & details

- High-quality Rotary Arm Stretch Wrapper RA-1
- High-speed wrapping: 30 pallets per hour
- Direct floor placement: no turntable or ramps needed
- Wraps pallets up to 1.2 x 1.2 m
- Maximum wrap height: 2000 mm
- Uses standard 500 mm film width
- 250 % film pre-stretch for material savings

### TECHNICAL DATA

|                          |                          |                               |                       |
|--------------------------|--------------------------|-------------------------------|-----------------------|
| Maximum Wrapping Speed   | 25-30 loads/hour         | Max Pallet Size               | 1.2 x 1.2 m           |
| Maximum Wrapping Height  | 2000 mm                  | Wrapping Speed                | 3-12 RPM (Adjustable) |
| Standard Film Width      | 500 mm                   | Film Capacity (Roll Diameter) | 250 mm                |
| Standard Pre-Stretch     | 250% pre-stretch         | Film Delivery System          | Motor control         |
| Up and Down Drive System | Belt drive               | Machine Size                  | 2.68 x 1.1 x 3.1 m    |
| Machine Weight           | 600 KG                   | Voltage                       | 220V/50/60Hz          |
| Frame                    | Steel + Aluminum profile | Rotary Drive                  | Slewing Bearing Drive |



## SMARTWRAP S3 In-line Fully Automatic Pallet Wrapping Machine

Art. no. **330520**



Price & details

- High-quality SMARTWRAP S3 In-line Fully Automatic Pallet Wrapping Machine
- Maximum Wrapping Speed is 30-40 loads per hour
- Maximum Wrapping Height is 3200 mm with an optional mast upgrade
- Turntable Size is 2000 mm in diameter with a 550 mm adjustable height
- Maximum Load Weight capacity is 3000 kg
- Pre-Stretch Ratio is 300% for optimal film utilization
- Film Delivery System is Power Roller Stretch Plus for smooth operation

### TECHNICAL DATA

|                              |                                      |                         |                       |
|------------------------------|--------------------------------------|-------------------------|-----------------------|
| Brand                        | SMARTWRAP S3                         | Maximum Wrapping Speed  | 30-40 loads/hour      |
| Load Size Diagonal           | 1753 mm                              | Maximum Wrapping Height | 2400 mm               |
| Turntable Speed              | 0-15 RPM (Adjustable)                | Turntable Size          | 2000 mm               |
| Turntable Drive              | 1.5 PH                               | Film & Clamp Cut        | Automatic (Heat type) |
| Max Load Weight              | 3000 KG                              | Standard Film Width     | 500 mm                |
| Constant Film Delivery Force | Standard                             | Standard Pre-Stretch    | 300% pre-stretch      |
| Roller Materials             | Stainless Steel 201, Diameter: 89 mm | Film Capacity           | 250 mm Diameter       |



## Box Wrapping Machine P409

Art. no. **330700**

- Efficient speed of 30 RPM for quick packaging turnaround
- Adjustable settings optimize wrapping process for various products
- Large diameter rotary table (ø60cm) ensures efficient handling of diverse items
- High-quality construction maintains optimal operating conditions for consistent performance
- Detailed security lock provides stability and safety during operation
- Lightweight and compact design facilitates easy transportation and setup
- User-friendly interface streamlines operation , reducing training time



Price & details

### TECHNICAL DATA

|                   |                                                         |                |                                    |
|-------------------|---------------------------------------------------------|----------------|------------------------------------|
| Load weight       | 70kg                                                    | Turntable size | 60cm                               |
| Wrapping material | PE film                                                 | Roller height  | Short roller:45cm Long roller:85cm |
| Speed             | 30r/Min                                                 | Product size   | 107*42*26cm,30kg                   |
| Voltage           | 220V,50-60HZ(110V also can do, please contact supplier) | Power          | 25W                                |
| Usage             | All kind package outside film wrapping                  | Wrapping type  | Electric automatic                 |



## Box wrapping machine SMARTWRAP B3 PRESTRETCH

Art. no. **330710**

- Box wrapping machine SMARTWRAP B3 with 300% PRESTRETCH function
- High-speed operation at 12 RPM for rapid and efficient box wrapping
- Versatile and customizable, accommodating a wide range of box sizes and shapes
- A robust and dependable build ensures long-lasting , reliable performance
- Energy-efficient features and minimal film usage cut operating costs and environmental impact
- Elevates product presentation, ensuring professional and secure packaging
- Digital Display – User-friendly interface streamlines operation and safety features to enhance efficiency



Price & details

### TECHNICAL DATA

|                          |                          |                         |                                                             |
|--------------------------|--------------------------|-------------------------|-------------------------------------------------------------|
| Luggage Wrapping Machine | Yes                      | Turntable               | 800 mm                                                      |
| Film Thickness           | 14 microns               | Film Width              | 500 mm                                                      |
| Film Roll Diameter       | 250 mm                   | Film Out Method         | Stretch                                                     |
| Standard Stretch Ratio   | 300%                     | Maximum Wrapping Height | 900 mm (other height on request – waiting time ca 10 weeks) |
| Maximum Load Weight      | 1000 Kg                  | Turntable Speed         | 0-12 RPM (Adjustable)                                       |
| Up and Down Speed        | 0-5.5 m/min (Adjustable) | Turntable Size          | 800 mm (other sizes on request – waiting time ca 10 weeks)  |



## ROBI-600B Robot Stretch Wrapper PRESTRETCH

Several variants – see below

- Revolving around objects, ideal for every shape, dimension, and weight
- Compact design performs well in small spaces
- Fully charged can wrap 200 pallets
- Powered by a robust and durable battery lasting up to 800 charges
- Optimal battery autonomy with battery charger and indicator
- Easily movable from one load to another
- Suitable for all kinds of conditions and work environments



Price & details

### VARIANTS · WRAPPING HEIGHT

**330800** 2400mm

**330802** 2800mm

### TECHNICAL DATA

|                         |                                                             |                     |                                          |
|-------------------------|-------------------------------------------------------------|---------------------|------------------------------------------|
| Power source            | Battery                                                     | Wrapping speed      | 90m/min                                  |
| Max. pallet size        | No limit                                                    | Min. pallet size    | 600x600mm                                |
| Max. wrapping height    | 2400 / 2800 mm                                              | Film stretch (%)    | ROBI-600A Mechanical stretch             |
| Film material           | LLDPE film, width $\leq$ 500mm, outer diameter $\leq$ 280mm | Film tension        | Adjustable                               |
| Max. film spec.         | Ø250x500mm                                                  | Elevator unit speed | Adjustable                               |
| Gross weight/Net weight | 450kg/430kg                                                 | Machine size        | (L x W x H) 1583 x 1233 x 2770 / 3170 mm |



## Stretch film dispenser HOLD3 – Stretching Rate: 35% – Film Width: 500mm, Inner Dia.: 76 mm

Art. no. **331000**

- Stretch film dispenser HOLD3 designed for industrial use
- Adjustable height fits film widths 12 to 20 inches
- Compatible with film rolls on a 3-inch (76 mm) core
- Lightweight design with approx. 3.2 lbs (1.45 kg)
- Durable metal frame with rust-resistant finish
- Precise manual tension adjustment control
- Ergonomic handles with soft foam grip for comfort



Price & details

### TECHNICAL DATA

|                          |                                   |               |                                          |
|--------------------------|-----------------------------------|---------------|------------------------------------------|
| Film Width Compatibility | 12 – 20 inches (30 – 50 cm)       | Core Diameter | 3 inches (76 mm)                         |
| Weight                   | Approx. 3.2 lbs (1.45 kg)         | Material      | Durable metal with rust-resistant finish |
| Tension Adjustment       | Manual control for film tightness | Handle Grip   | Soft foam padded for comfort             |



**FLEX TAPE Semi automatic Carton Sealer  
48-72mm (Kraft or BOPP tape)**

Art. no. **230010**



Price & details

- Suitable for adhesive tapes of width from 48mm to 72mm
- Package length: (150 to +∞) mm; width: (120-480) mm; height: (120-480) mm
- 48-72mm (Kraft or BOPP tape)
- Sealing speed: 20 meters/min
- With side belts drive
- Suitable for heavyweight products
- Working table height is adjustable from 550 mm to 750 mm

**TECHNICAL DATA**

|              |                                  |               |                                                         |
|--------------|----------------------------------|---------------|---------------------------------------------------------|
| Power supply | 1p 110V/220V 50Hz/60Hz 400W      | Sealing speed | 20 meters/min                                           |
| Carton size  | L(150-∞)×W(120-480)×H(120-480)mm | Tape size     | 48-72mm(Kraft or BOPP tape)                             |
| Machine size | L(1090)×W(890)×H(1280)mm         | Shipping size | L(1200)×W(1050)×H(1435)mm                               |
| G.W/N.W      | 230kg/180kg                      | Optional      | ①Extension roller table ②Feet wheel<br>③Stainless steel |



## Automatic Carton Sealer Machine AUTO-TAPE 48-72mm (Kraft or BOPP tape)

Art. no. **230020**

- AUTO-TAPE Automatic Carton Sealer for Kraft or BOPP tape wide 48-72mm
- Convey speed: 20m/min
- Automatically detects the height and width of the package and can close random size boxes without adjusting the machine
- The 30kg carton can be conveyed steadily by large power convey motor
- Box dimensions: Length: 150-∞mm; Width: 120-470mm; Height: 120-450mm
- The height of the carton sealer can be adjusted : 550mm ~ 750mm
- Allow for flexibility in production



Price & details

### TECHNICAL DATA

|                         |                                          |                 |                                         |
|-------------------------|------------------------------------------|-----------------|-----------------------------------------|
| Speed                   | 20m/min                                  | Carton size     | L 150mm~∞; W 120mm~470mm; H 120mm~450mm |
| Working table height    | 500-710mm (tunableness)                  | Power Supply    | 1P, AC220V, 50Hz, 600W                  |
| Compressed Air Pressure | 0.4MPa-0.6MPa                            | Sealing Mode    | Kraft paper tape, BOPP tape             |
| Tape Width              | 48mm ~ 72mm                              | Weight capacity | 30kg                                    |
| Machine weight          | 240kg                                    | Table Height    | 550mm ~ 750mm (foot cup)                |
| Machine Dimension       | L1154 × W890 × H (table height + 840 mm) | Nocise          | ≤75DB                                   |
| Condition               | Humidity≤98%, temperature 0-40°C         | Lubrication     | General application lubrication oil     |



## AUTO&FOLD-5050 automatic box taper machine Kraft/BOPP – Auto height & width adjustment + top-flap closure

Art. no. **230022**

- Automatic box taping machine with flap folder
- Adjusts width and height by itself to each carton
- Cartons L200 × W150 × H150 to L600 × W500 × H500 mm
- Tape 48–60 mm , Kraft or BOPP, top and bottom
- Side drive belts, 16 m/min
- Working height 600–850 mm
- Safety guard, emergency stop, pressure gauges



Price & details

### TECHNICAL DATA

|                         |                                                                |                                |                                              |
|-------------------------|----------------------------------------------------------------|--------------------------------|----------------------------------------------|
| Type                    | Automatic carton sealer with flap folder and automatic size... | Conveyor speed                 | 16 m/min                                     |
| Carton size (L × W × H) | min. 200 × 150 × 150 mm, max. 600 × 500 × 500 mm               | Tape width                     | 48–60 mm, Kraft or BOPP                      |
| Tape heads              | Upper and lower                                                | Flap folding                   | Automatic: front, rear and side flaps        |
| Size adjustment         | Automatic width and height, pneumatic                          | Working height                 | 600–850 mm, adjustable                       |
| Power supply            | 220 V, 50–60 Hz, 1-phase, 200 W                                | Compressed air                 | 6 bar (6 kg/cm <sup>2</sup> ), 100 NI/min    |
| Safety                  | Safety guard with doors, emergency stop                        | Machine dimensions (L × W × H) | about 1780 × 1080 × 1400 mm                  |
| Machine weight          | about 280 kg                                                   | Shipping                       | 1 crate, 1920 × 1100 × 1750 mm, about 310 kg |



## TOP TAPE Automatic Box Taping Machine Carton Sealer 48-72mm (Kraft or BOPP tape)

Art. no. **230030**



Price & details

- TOP TAPE Automatic Box Taping Machine Carton Sealer 48-72mm for Kraft or BOPP tape
- Automatically fold carton top flaps
- Automatically convey and seal carton top and bottom meanwhile
- Suitable to connect full automatic production line
- Suitable for adhesive tapes of width from 48mm to 72mm
- Table height: 550-750mm (adjustable)
- Package size: L(280 ~ 550)mm × W(120 ~ 480)mm × H (120 ~ 480)mm

### TECHNICAL DATA

|                       |                                                                |               |                                  |
|-----------------------|----------------------------------------------------------------|---------------|----------------------------------|
| Power supply          | 1p 110V/220V 50Hz/60Hz 400W                                    | Sealing speed | 19 meter/min                     |
| Carton size           | L(280 ~ 550)mm × W(120 ~ 480)mm × H(120 ~ 480)mm               | Tape size     | 48-72mm (Kraft or BOPP tape)     |
| Air pressure          | 4-6 kgf/cm <sup>2</sup>                                        | Table height  | 550-750mm (adjustable)           |
| Electronic components | Motor: Taiwan "Luson" Contactor & Pushbutton switch: France... | Sealing tape  | Kraft tape, BOPP tape            |
| Noise                 | ≤75dB(A)                                                       | Condition     | Humidity≤90%, temperature 0-40°C |
| Lubrication           | General application lubrication oil                            | Machine size  | L(1650)×W(836)×H(1400)mm         |
| Shipping size         | L(2100)×W(1100)×H(1500)mm                                      | G.W./N.W      | 230kg/180kg                      |



## RUBBER automatic box taper machine 48-60mm (Kraft or BOPP tape) – 16m/min – Max. Carton size: W500\*H500mm – Min. Carton Size: W120\*H120mm

Art. no. **230034**



Price & details

- Automatic carton sealer with top flap folder
- Tapes top and bottom in one pass
- Cartons W120 × H120 to W500 × H500 mm
- Tape 48–60 mm , Kraft or BOPP
- Side drive belts, 16 m/min
- Width and height set with hand wheels
- Safety guard and emergency stop

### TECHNICAL DATA

|                     |                                                     |                                |                                             |
|---------------------|-----------------------------------------------------|--------------------------------|---------------------------------------------|
| Type                | Automatic carton sealer with top flap folder        | Conveyor speed                 | 16 m/min                                    |
| Carton size (W × H) | min. 120 × 120 mm, max. 500 × 500 mm                | Tape width                     | 48–60 mm, Kraft or BOPP                     |
| Tape leg (overlap)  | 5–50 mm, adjustable                                 | Tape heads                     | Upper and lower, interchangeable cartridges |
| Flap folding        | Automatic: front, rear and side flaps               | Size adjustment                | Manual, with hand wheels                    |
| Drive               | Side belts, conveyor motor 120 W                    | Power supply                   | 220–240 V, 50–60 Hz, 1-phase, 240 W         |
| Compressed air      | Required for the pneumatic flap folder              | Height adjustment of the legs  | 350 mm                                      |
| Safety              | Transparent safety guard with doors, emergency stop | Machine dimensions (L × W × H) | about 1780 × 950 × 1400 mm                  |



## FLEX BOX Semi automatic Case Erector

Art. no. **230040**

- Fold bottom covers of carton and can be used as the platform for packing products
- Capacity: 6-7 cartons/min
- Height of work table: 700-800mm
- Box length: 200 – 600 mm
- Box width: 150 – 480 mm
- Box height: 120 – 500 mm



Price & details

### TECHNICAL DATA

|                      |                                                          |              |                                      |
|----------------------|----------------------------------------------------------|--------------|--------------------------------------|
| Air source           | 4-6.5 bar                                                | Case size    | L(200-600)×W(150-480)mm×H(120-500)mm |
| Height of work table | 700-800mm                                                | Power supply | 220V/50HZ                            |
| Power                | 600W                                                     | Capacity     | 6-7 cartons/min                      |
| Machine weight       | 130kg                                                    | Air Pressure | 4-6.5 bar                            |
| Machine Dimension    | 1500 x 900 x 780 mm (on the stand) / 880 mm (on castors) |              |                                      |

## Automatic Case Erector Machine AUTOBOX – 16 cases/min – Siemens PLC

Art. no. **230050**




- Automatic case erector AUTOBOX – 16 cases/min – Siemens PLC – horizontal or sloping worktable
- Ability to work with both Bopp adhesive tape and paper tape
- Can handle carton with dimensions of L 250–530mm x W 150–400mm, x H 225–600mm (after folding and sealing the bottom flap of...
- The horizontal worktable can store up to 150 double-corrugated cases
- Machine is powered by a 1P 220V 50/60 HZ 400W voltage and requires an air supply of 6Kgf/cm<sup>2</sup>
- IP54 protective power supply
- Noise level of 75 DB, which helps reduce noise pollution in the work environment



Price & details

### TECHNICAL DATA

|                         |                                                                |                  |                                                      |
|-------------------------|----------------------------------------------------------------|------------------|------------------------------------------------------|
| Voltage                 | 1P 220V 50/60 HZ 400W                                          | Machine weight   | G.W 1000kgs/ N.W 950kgs                              |
| Machine size (L/ W/ H)  | Machine with sloping worktable: L3045×W1855×H1300mm Machine... | Worktable height | 650mm (standard) -1000mm (maximum, customer-made)    |
| Tape                    | Bopp tape or draft paper tape                                  | Tape size        | 4.8 – 7.2cm 48mm (standard) 60/72mm (custom made)    |
| Power                   | 0.4KW                                                          | Air supply       | ≥6Kgf/cm <sup>2</sup>                                |
| Protective power supply | IP54                                                           | Noise            | ≤75DB                                                |
| Environment condition   | Humidity ≤98%, Temperature -10°C ~ 40°C                        | Working speed    | 0-16 cases/min (depending on the size of the carton) |

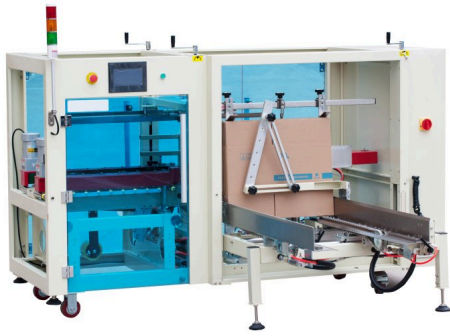

## AUTOBOX10 automatic case erector – 10-15 cases/min

Art. no. **230052**



Price & details

- AUTOBOX10 automatic case erector – 10-15 cases/min
- Carton size compatibility: 200mm to 500mm (length) x 200mm to 400mm (width) x 150mm to 350mm (height)
- Maximum carton size constraints:  $L + W \leq 900\text{mm}$ ,  $\frac{1}{2}W + H \leq 550\text{mm}$
- Machine dimensions: 2020mm (L) x 2080mm (W) x 1396mm (H)
- Machine weight: 530 kg net / 550 kg gross
- Working speed: 10 to 15 cartons per minute
- Tape width supported: 50mm or 60mm , optional 75mm available

### TECHNICAL DATA

|                                |                                           |                      |                                                     |
|--------------------------------|-------------------------------------------|----------------------|-----------------------------------------------------|
| Type                           | Automatic case erector with bottom taping | Speed                | 10–15 cartons per minute                            |
| Carton size (L × W × H)        | 200–500 × 200–400 × 150–350 mm            | Carton limits        | L + W under 900 mm, $\frac{1}{2}W + H$ under 550 mm |
| Tape width                     | 50 or 60 mm (75 mm on request)            | Carton widths stored | up to 10                                            |
| Control                        | touch screen, servo width setting         | Table height         | 650 mm                                              |
| Compressed air                 | about 0.5 MPa                             | Power supply         | 220 V, 50 Hz, 1-phase, European plug                |
| Machine dimensions (L × W × H) | 2020 × 2080 × 1396 mm                     | Machine weight       | 530 kg                                              |
| Shipping                       | crate 245 × 126 × 160 cm, 550 kg          | Warranty             | 12 months                                           |



### Shrink wrapping machine B4255

Art. no. **240010**

- 3-in-1 Shrink wrapper – shrink wrap machine B4255 can cut, shrink and wrap at once
- Settings can be easily changed on the Control panel – The entire shrinking and wrapping settings can be controlled through t...
- High Wrapping capability of 8pcs/min thanks to the striking alloy cutting knife and a large fan
- Size of sealing area W420mm x L550mm x H200mm
- Working plate height(on stand): 920mm
- High-grade technology – The heat shrinkage is visible through the transparent range hood made of plexiglass in the packaging...



Price & details

#### TECHNICAL DATA

|                                |                     |                            |                     |
|--------------------------------|---------------------|----------------------------|---------------------|
| Power supply                   | 1P hase/230V /3.5kw | Overall machine dimensions | W750 x L1230mm      |
| Working plate height(on stand) | 920mm               | Machine weight             | 89KG                |
| Sealing area                   | W420mm x L 550mm    | Maximum product height     | 200mm               |
| Impulse sealing system         | Bottom blade        | Maximum roll dimensions    | DIA 250mm x W 600mm |
| Output                         | 4-8pcs/min          |                            |                     |



### Heat shrink machine F7060 – min product L:100mm, W: 100mm, H:30mm, max product: 700\*600\*300mm

Art. no. **240014**



Price & details

- Heat Shrink Machine F7060 compact 2 in 1 system
- Power supply supports 110V or 220–240V 50–60Hz
- Machine power capacity is 5.0 kW for continuous use
- Maximum sealing size up to 700 x 600 mm
- Maximum packing size W+H 650 W 580 L 650 H 150
- Working efficiency reaches 500–800 pieces per hour
- Machine size measures 1720 x 950 x 1100 mm

#### TECHNICAL DATA

|                    |                                                              |                                |                                |
|--------------------|--------------------------------------------------------------|--------------------------------|--------------------------------|
| Type               | 2-in-1 heat shrink machine (seal, cut and shrink)            | Seal area                      | 700 × 600 mm                   |
| Largest pack       | L up to 650, W up to 580, H up to 150 mm; W + H under 650 mm | Smallest pack                  | 100 × 100 × 30 mm              |
| Film               | PVC or POF, centre-folded                                    | Output                         | about 500–800 packs per hour   |
| Shrink temperature | usually 100–150 °C                                           | Sealing time                   | usually 0.4–0.6 s              |
| Power supply       | 220 V, 50 Hz, 1-phase, 5 kW                                  | Machine dimensions (L × W × H) | 1720 × 950 × 1100 mm           |
| Machine weight     | 150 kg                                                       | Shipping                       | crate 165 × 98 × 87 cm, 170 kg |
| Warranty           | 12 months                                                    |                                |                                |

### Shrink wrapper T5040

Art. no. **240020**



Price & details



- T5040 is a semi-automatic shrink-wrapping machine consisting of L sealer and Shrink Tunnel in a single frame
- Film type: monolayer folding POF film
- Thickness: 0.015~0.019mm
- Film width: up to 570mm
- This machine separates sealing and shrinking cycles for faster operation
- Chamber dimensions are 500 mm by 400 mm
- An external air compressor is needed and it is not included with the machine

#### TECHNICAL DATA

|                            |                          |                                |                  |
|----------------------------|--------------------------|--------------------------------|------------------|
| Power supply               | 3P+N 230V/380V           | Maximum power required         | 5KW              |
| Overall machine dimensions | W775 x L2200mm x H1500   | Working plate height(on stand) | 920mm            |
| Tunnel entrance dimensions | 450 x230mm               | Tunnel length                  | 700mm            |
| Machine weight             | 270kg                    | Sealing area                   | W500mm x L 400mm |
| Air pressure               | 5 ~ 8 kg/cm <sup>2</sup> | Maximum product height         | 160mm            |
| Impulse sealing system     | top blade                | Maximum roll width             | 600mm            |
| Output                     | 8-15pcs/min              |                                |                  |



**Automatic L bar sealer with shrink tunnel  
T4535 – Max. Package Size:  
L400\*W300\*H220mm, Min package size:  
L:100mm, W: 50mm, H: no limit**



Price & details

Art. no. **240023**

- Automatic L Bar Sealer T4535 for industrial packaging operations
- Handles packs up to 400 × 300 × 220 mm
- Minimum sealing range 100 × 50 mm flexible dimensions
- Uses POF shrink film with 15–25 micron thickness
- Film width supported from 100 mm to 550 mm
- Operates on 380 V 50–60 Hz three-phase power supply
- Power consumption approximately 14 kW

**TECHNICAL DATA**

|                    |                                      |                    |                                                    |
|--------------------|--------------------------------------|--------------------|----------------------------------------------------|
| Power Supply       | 380 V / 50–60 Hz, 3-phase            | Power Consumption  | 14 kW                                              |
| Max Package Size   | L400 × W300 × H220 mm                | Min Package Size   | L100 × W50 mm, Height: No limit                    |
| Film Type          | POF shrink film                      | Film Width         | 100 mm – 550 mm                                    |
| Film Thickness     | 15–25 micron                         | Machine Dimensions | ≈ 2600 × 700 × 1700 mm                             |
| Weight             | ≈ 395 kg                             | Operation Mode     | Automatic sealing and shrinking in one pass        |
| Sealing Blade Type | Heat-resistant L-type sealing system | Control System     | Electronic temperature controller and photo sensor |



**AUTOSHRINK automatic shrink wrapping  
machine, sealer with shrink tunnel, up to  
50 packs/min**



Price & details

Art. no. **240050**

- AUTOSHRINK automatic shrink wrapping machine consists of two machines: an automatic side sealer and a shrink tunnel
- High-quality reliable machine with robust structure and components from SIEMENS, Schneider, FOTEK etc.
- Protect product and improve product appearance and value
- Precise shrink film wrapping and sealing
- Adjustable working plate height, 850mm±50mm
- Accommodates formats up to 450mm in width
- Output: up to 50 wrapped products per minute (depending on the product)



## Automatic Side Sealer A450 – 15m/min – Highest packing 150mm

Art. no. **240055**

- Automatic Side Sealer A450 supports product height up to 150 mm
- Compatible with POF, PVC, and PP shrink films
- Operates on 220V, 50/60Hz power supply
- Machine power consumption is 1.35 kW
- Maximum seal width capacity of 350 mm
- Sealing speed reaches up to 15 meters per minute
- Machine dimensions are 1650 x 800 x 1450 mm (LxWxH)



Price & details

### TECHNICAL DATA

|                     |                          |                |                                                                |
|---------------------|--------------------------|----------------|----------------------------------------------------------------|
| Type                | Automatic side sealer    | Pack size      | length unlimited, height under 150 mm, width + height under... |
| Smallest pack       | 50 × 50 × 20 mm          | Output         | up to 30 packs per minute                                      |
| Sealing speed       | up to 15 m/min           | Film           | PE, POF or PVC, centre-folded, 0.015–0.10 mm                   |
| Sealing temperature | about 180 °C             | Sealing time   | 0–3 s                                                          |
| Power supply        | 220 V, 50/60 Hz, 1.35 kW | Compressed air | about 0.5 MPa                                                  |
| Machine weight      | 260 kg                   | Shipping       | crate 182 × 100 × 159 cm, 300 kg                               |
| Warranty            | 12 months                |                |                                                                |



## Thermal Heat Shrink Tunnel V4530 – 10m/min – Max product dimensions: 1400\*350\*200

Art. no. **240060**

- Shrink Tunnel V4530 designed for industrial shrink wrapping
- Supports max product size 1400mm length 350mm width 200mm height
- Compatible with POF and PE shrink films thickness 15-160 microns
- Shrink film width range 200mm to 520mm
- Adjustable air blowing angle for precise heat distribution
- Digital temperature control for consistent shrink quality
- Operates with standard industrial power supply



Price & details

### TECHNICAL DATA

|                                   |                             |                     |                                      |
|-----------------------------------|-----------------------------|---------------------|--------------------------------------|
| Max Product Dimension (L x W x H) | 1400mm x 350mm x 200mm      | Shrink Film Types   | POF and PE                           |
| Film Thickness                    | 15-160 microns              | Film Width          | 200mm – 520mm                        |
| Air Blowing                       | Adjustable Angle            | Temperature Control | Digital and Adjustable               |
| Power Supply                      | Standard Industrial Voltage | Operating Speed     | Variable – optimized per application |



**SHRINKCOMBO shrink wrapping machine –  
Automatic Side Sealer A450 – 15m/min –  
Highest packing 150mm + Shrink Tunnel  
V4530 – 10m/min – Max product:  
1400\*350\*200H mm**



Price & details

Art. no. **240065**

- SHRINKCOMBO shrink wrapping machine combines side sealer and tunnel
- Product dimensions Automatic Side Sealer A450: Minimal product dimensions: L:5cm, W: 5cm, H:2cm Max product dimensions: W+H<...
- Minimal product dimensions: L:5cm, W: 5cm, H:2cm
- Max product dimensions: W+H<420mm , Length unlimited, H<150mm
- Product dimensions Shrink Tunnel V4530: Minimal product dimensions: No limit Max product dimensions: 1400\*350\*250mm (L\*W\*H)
- Minimal product dimensions: No limit

**TECHNICAL DATA**

| Component                  | Specification      | Details                        |
|----------------------------|--------------------|--------------------------------|
| Automatic Side Sealer A450 | Power Supply       | 200V, 1.5KW, 50/60Hz           |
| Automatic Side Sealer A450 | Max Sealing Height | 250 mm                         |
| Automatic Side Sealer A450 | Sealing Time       | Adjustable                     |
| Shrink Tunnel V4530        | Power Supply       | Specification aligned with...  |
| Shrink Tunnel V4530        | Heat Source        | Hot air circulation with in... |
| Shrink Tunnel V4530        | Control System     | PID and solid-state relay t... |
| Shrink Tunnel V4530        | Conveyor           | Adjustable speed conveyor b... |



### DOZE300T chamber vacuum sealer, 260 mm seal bar, 10 m<sup>3</sup>/h

Art. no. **260013**



Price & details

- DOZE300T tabletop chamber vacuum sealer for industrial packaging
- Chamber size 385 × 280 × 50 mm verify product fit
- Sealing bar 260 × 8 mm maximum bag mouth width
- Pump capacity 10 m<sup>3</sup>/h supports predictable evacuation cycles
- Typical cycle 10–20 s depending on load and pouch
- Electrical input 220 V 50 Hz single phase operation
- Installed power 0.4 kW energy efficient bench operation

#### TECHNICAL DATA

|                          |                                            |                          |                                             |
|--------------------------|--------------------------------------------|--------------------------|---------------------------------------------|
| Machine type             | Tabletop chamber vacuum sealer, single bar | Chamber size (L × W × H) | 385 × 280 × 50 mm                           |
| Sealing bar              | single, 260 × 8 mm                         | Vacuum pump              | 10 m <sup>3</sup> /h                        |
| Typical cycle time       | 10–20 s                                    | Vacuum time              | 0–99 s                                      |
| Sealing and cooling time | 0–9.9 s each                               | Programs                 | 10 (P0–P9)                                  |
| Voltage / frequency      | 220 V / 50 Hz, single phase                | Installed power          | about 0.4 kW                                |
| Machine size (L × W × H) | about 490 × 450 × 320 mm                   | Construction             | chamber with a transparent lid, bench model |
| Gas flush (MAP)          | not on this model                          | Safety                   | emergency stop, grounding protection        |



## DOZE400TB commercial vacuum sealer 400 mm – 20m<sup>3</sup>/h

Art. no. **260014**



Price & details

- DOZE400TB commercial vacuum sealer features a double sealing bar 400 mm x 10 mm
- Vacuum chamber dimensions are 440 mm x 420 mm x 75 mm
- Equipped with a 20 cubic meters per hour vacuum pump capacity
- Operates on approximately 0.9 kW power, single-phase 220V
- Offers up to 10 programmable control settings for customization
- Standard vacuum version without gas flush
- Compatible with barrier films and laminated aluminum-foil bags

### TECHNICAL DATA

|                 |                                            |                          |                                          |
|-----------------|--------------------------------------------|--------------------------|------------------------------------------|
| Machine type    | Tabletop chamber vacuum sealer, double bar | Chamber size (L × W × H) | 440 × 420 × 75 mm                        |
| Sealing bars    | two, 400 × 10 mm each                      | Vacuum pump              | 20 m <sup>3</sup> /h                     |
| Vacuum time     | 0–99 s                                     | Sealing and cooling time | 0–9.9 s each                             |
| Programs        | 10 (P0–P9)                                 | Voltage / frequency      | 220 V / 50 Hz, single phase              |
| Installed power | about 0.9 kW                               | Machine size (L × W × H) | about 560 × 500 × 460 mm                 |
| Machine weight  | about 70 kg                                | Construction             | stainless steel chamber, transparent lid |
| Gas flush (MAP) | not on this model                          | Safety                   | emergency stop, grounding protection     |



## DOZE400B industrial vacuum sealer 400 mm – 20m<sup>3</sup>/h

Art. no. **260023**



Price & details

- DOZE400B Industrial Vacuum Sealer with single chamber 440x420x75 mm
- Equipped with double sealing bars 400x10 mm for secure sealing
- Vacuum pump capacity is 20 cubic meters per hour
- Operates on 220V single-phase power with 0.9 KW rating
- Features programmable control panel with 10 memory program settings
- Constructed from durable stainless steel with transparent acrylic lid
- Includes emergency stop button and grounding protection for safety

### TECHNICAL DATA

|                 |                                                  |                          |                                               |
|-----------------|--------------------------------------------------|--------------------------|-----------------------------------------------|
| Machine type    | Floor-standing chamber vacuum sealer, double bar | Chamber size (L × W × H) | 440 × 420 × 75 mm                             |
| Sealing bars    | two, 400 × 10 mm each                            | Vacuum pump              | 20 m <sup>3</sup> /h                          |
| Vacuum time     | 0–99 s                                           | Sealing and cooling time | 0–9.9 s each                                  |
| Programs        | 10 (P0–P9)                                       | Voltage / frequency      | 220 V / 50 Hz, single phase                   |
| Installed power | about 0.9 kW                                     | Machine size (L × W × H) | about 560 × 500 × 1050 mm                     |
| Machine weight  | about 120 kg                                     | Construction             | stainless steel body, transparent acrylic lid |
| Gas flush (MAP) | not on this model                                | Safety                   | emergency stop, grounding protection          |



## DOZE600 double chamber vacuum sealer with double chamber and two pumps 2×20m³/h

Art. no. 260030



Price & details

- DOZE600 Double Chamber Vacuum Sealer for industrial packaging
- Double chamber design enables continuous sealing operation
- Dual vacuum pumps with total capacity of 40 m³/h
- Chamber size 540 × 670 × 50 mm
- Sealing bar length 620 mm for wide packaging bags
- Power supply 380–415V three phase industrial standard
- Cycle time 10–40 seconds

### TECHNICAL DATA

|                      |                                                  |                          |                                       |
|----------------------|--------------------------------------------------|--------------------------|---------------------------------------|
| Chamber Size         | 540 × 670 × 50 mm                                | Sealing Bar Size         | 620 × 10 mm × 4                       |
| Vacuum Pump Capacity | 2 × 20 m³/h or single 40 m³/h pump               | Power Supply             | AC 3 Phase 220V/60Hz or 380–415V/50Hz |
| Material             | Stainless Steel Structure                        | Machine Size             | 1450 × 750 × 1000 mm                  |
| Control System       | PC Control Panel with 10 Program Memory Settings | Oil Type for Vacuum Pump | ISO-VG32 or No.68/100 Vacuum Oil      |
| Working Temperature  | 5°C – 40°C                                       | Relative Humidity        | ≤50% at 40°C, ≤90% at 20°C            |



## Foot Operated Heat Sealer ZONE300D 300mm

Art. no. 260100



Price & details

- ZONE300D Heat sealer machine provides constant temperature direct heat sealing
- Features 300 mm sealing length and 14 mm sealing width
- Operates on 220V single-phase power supply for energy efficiency
- Equipped with dual 175W heating elements for rapid heat-up
- Temperature adjustable from 0 to 300 degrees Celsius for versatility
- Constructed with durable aluminum alloy die-cast frame
- Measures 345 by 480 by 880 millimeters, compact industrial design

### TECHNICAL DATA

|                |                                                         |                          |                                 |
|----------------|---------------------------------------------------------|--------------------------|---------------------------------|
| Type           | Constant heat pedal sealer                              | Sealing length           | 300 mm                          |
| Sealing width  | 14 mm                                                   | Temperature range        | 0–300 °C, adjustable            |
| Heating power  | 175 W × 2                                               | Supply voltage           | 220 V, single phase             |
| Operation      | foot pedal                                              | Frame                    | die-cast aluminium alloy        |
| Materials      | PE, PS, multi-layer laminates, aluminium-laminated bags | Machine size (L × W × H) | 345 × 480 × 880 mm              |
| Machine weight | 21 kg                                                   | Crate                    | 810 × 560 × 270 mm, about 25 kg |
| Warranty       | 12 months                                               |                          |                                 |



### ZONE450F Impulse bag sealer – 450mm

Art. no. **260120**

- ZONE450F Impulse bag sealer with 450 mm sealing length
- Sealing width adjustable between 2 mm and 5 mm
- Operates on 110V or 220V single phase power supply
- Pulse power output rated at 800 W efficiency
- Heating time adjustable from 0 to 2.5 seconds
- Compact dimensions 550 × 520 × 880 mm for placement
- Durable aluminum alloy die cast frame for longevity



Price & details

#### TECHNICAL DATA

|                          |                                 |                |                              |
|--------------------------|---------------------------------|----------------|------------------------------|
| Type                     | Impulse pedal sealer            | Sealing length | 450 mm                       |
| Sealing width            | 2–5 mm                          | Heating time   | 0–2.5 s, adjustable          |
| Power                    | 800 W                           | Supply voltage | 110 V or 220 V, single phase |
| Operation                | foot pedal                      | Materials      | PE, PP, multi-layer film     |
| Machine size (L × W × H) | 550 × 520 × 880 mm              | Machine weight | about 20 kg                  |
| Crate                    | 790 × 545 × 257 mm, about 22 kg | Warranty       | 12 months                    |



### Foot pedal impulse sealer ZONE600F – 600mm

Art. no. **260122**

- Impulse heat sealer ZONE600F 600 mm sealing length for wide industrial packaging
- Pedal-operated impulse sealer enables hands-free precise sealing
- Impulse heat technology ensures energy-efficient sealing cycles
- Adjustable heating time 0 to 2.5 seconds for material flexibility
- Produces strong seals with 2–5 mm sealing width
- High performance supported by 1000 W pulse power
- Compatible with PE PS and multilayer composite films



Price & details

#### TECHNICAL DATA

|                          |                                 |                |                          |
|--------------------------|---------------------------------|----------------|--------------------------|
| Type                     | Impulse pedal sealer            | Sealing length | 600 mm                   |
| Sealing width            | 2–5 mm                          | Heating time   | adjustable               |
| Power                    | 1000 W                          | Supply voltage | single phase with earth  |
| Operation                | foot pedal                      | Materials      | PE, PP, multi-layer film |
| Machine size (L × W × H) | 700 × 570 × 880 mm              | Machine weight | about 22 kg              |
| Crate                    | 790 × 545 × 257 mm, about 24 kg | Warranty       | 12 months                |



## GT-100E Handheld thermal inkjet printer – One head

Art. no. **260200**



Price & details

- GT-100E Handheld thermal inkjet printer prints on multiple materials
- High resolution printing up to 300 x 300 DPI
- Print speed up to 406 meters per minute
- Adjustable print height from 1 mm to 12.7 mm
- Supports text barcodes QR codes logos serial numbers
- Wide ink compatibility water-based solvent food-grade UV
- Available ink colors black white red blue green yellow

### TECHNICAL DATA

|                  |                                                                |                          |                                                      |
|------------------|----------------------------------------------------------------|--------------------------|------------------------------------------------------|
| Print Technology | Thermal Inkjet (TIJ 2.5)                                       | Processor                | Cortex-A7 1.2GHz Dual-core + FPGA chipset            |
| Print Resolution | Vertical: 100/150/300 DPI ; Horizontal: 30-2400 DPI            | Print Speed              | Up to 406 meters/min (90 DPI)                        |
| Print Height     | 1 to 12.7 mm                                                   | Supported Ink Types      | Food-grade, water-based, oily, weak solvent, solvent |
| Ink Colors       | Black, white, red, yellow, blue, green, invisible, UV          | Ink Cartridge            | 42 ml with Contactless RFID Chip                     |
| Print Content    | Text, date/time, barcode, QR code, logos, serial numbers, d... | Operating System         | Embedded Linux                                       |
| Display          | 5-inch industrial color touch screen                           | Communication Interfaces | USB, RS232                                           |



## ST-210S-H1 Inkjet thermal printer – One head

Art. no. **260210**



Price & details

- ST-210S-H1 Inkjet thermal printer with single print head
- Printing resolution up to 600 x 600 DPI
- Maximum printing height 12.7 mm
- Printing speed up to 406 meters per minute
- Supports barcodes, QR codes, text and logos
- Compatible with water-based, solvent and food-grade inks
- Equipped with 7 inch industrial touch screen

### TECHNICAL DATA

|                    |                                                                 |                    |                                                                |
|--------------------|-----------------------------------------------------------------|--------------------|----------------------------------------------------------------|
| Nozzle Type        | TIJ 2.5 Thermal Foaming                                         | Nozzle Number      | 1 (Single Head)                                                |
| Maximum Resolution | 600 x 600 DPI                                                   | Printing Height    | 12.7 mm                                                        |
| Printing Speed     | 406 m/min (90 DPI), 304 m/min (120 DPI), 240 m/min (150 DPI)... | Printing Distance  | 1-5 mm                                                         |
| Print Content      | Text, Time, Date, Logo, Serial Number, Barcode, QR Code, Da...  | Supported Barcodes | CODE11, CODE39, EAN13, CODE128, CODE93, UPCA, UPCE, VIN and... |
| Supported QR Codes | QR Code, DataMatrix, Micro QR Code, PDF417, MicroPDF417         | Display            | 7-inch Industrial Touch Screen                                 |
| Operating System   | Embedded Linux                                                  | Interfaces         | USB, RS232, LAN                                                |
| Dimensions         | Controller 202 x 119 x 61.2 mm; Printhead 112 x 79 x 103 mm     | Materials          | Aviation-Grade Aluminum                                        |



## Dual Head Inkjet Printer ST-210S-H2

Art. no. **260211**

- ST-210S-H2 Thermal ink printer with dual print heads
- Printing height up to 25.4 mm with stitched heads
- Maximum resolution 600 × 600 DPI for clear print quality
- Printing speed up to 406 m/min at 90 DPI
- Equipped with 7-inch industrial touchscreen for easy operation
- Compatible with water-based solvent UV food-grade inks
- Prints text barcodes QR codes logos serial data



Price & details

### TECHNICAL DATA

|               |                                                                |                       |                                                                |
|---------------|----------------------------------------------------------------|-----------------------|----------------------------------------------------------------|
| Type          | Industrial thermal inkjet printer, TIJ 2.5                     | Number of print heads | 2, joined or independent                                       |
| Print height  | up to 25.4 mm joined, 12.7 mm per head                         | Print resolution      | up to 600 × 600 DPI                                            |
| Print speed   | 406 m/min (90 DPI), 304 (120 DPI), 240 (150 DPI), 120 (300...) | Printing distance     | 1–5 mm                                                         |
| Counters      | more than 20, independent                                      | Print content         | text, time, date, logo, shift, serial number, barcode, QR c... |
| Barcodes      | CODE11, CODE39, CODE93, CODE128, EAN13, EAN14, UPCA, UPCE...   | 2D codes              | QR code, DataMatrix, MicroQR, PDF417, MicroPDF417              |
| Ink cartridge | 42 ml per head, contactless RFID chip                          | Ink types             | food-grade, water-based, oily, weak solvent, solvent           |
| Ink colours   | black, white, red, yellow, blue, green, invisible, UV          | Display               | 7-inch colour industrial touch screen                          |



## AS600F Vertical Band Sealer – 13mm Seal Width, 0–15m/min, 20kg Load – Bag Height: 60cm

Art. no. **260300**

- AS600F Vertical Band Sealer with industrial heavy duty design
- Works with LDPE HDPE PP and laminated films
- Electronic constant temperature control ensures precise sealing results
- Sealing speed up to 15 meters per minute
- Adjustable temperature range from 0 to 300°C
- Handles film thickness from 0.04 to 0.20 mm
- Supports 20 kg conveyor load capacity for heavy packaging



Price & details

### TECHNICAL DATA

|                     |                                            |                          |                        |
|---------------------|--------------------------------------------|--------------------------|------------------------|
| Type                | Heavy-duty vertical continuous band sealer | Sealing width            | 13 mm, embossed        |
| Sealing speed       | 0–15 m/min, adjustable                     | Temperature range        | 0–300 °C, adjustable   |
| Conveyor load       | 20 kg in total, 5 kg per bag               | Bag sealing height       | 120–600 mm, adjustable |
| Film thickness      | 0,04–0,20 mm, single layer                 | Supply voltage           | AC 220 V / 50 Hz       |
| Motor power         | DC 24 V, 120 W                             | Heating power            | 400 W × 2              |
| Ambient temperature | 5–30 °C                                    | Machine size (L × W × H) | 1195 × 500 × 1245 mm   |
| Machine weight      | 190 kg                                     | Warranty                 | 12 months              |



### FS150 Bag sealing machine up to 3kg – Vertical Type, 0–13m/min

Art. no. **260303**

- FS150 Continuous Band Sealer with adjustable sealing speed
- Operates on AC 220V or 110V power supply
- Equipped with 50W motor and dual 300W heaters
- Temperature range 0–300°C with electronic control
- Maximum sealing speed 13 m/min for high throughput
- Handles film thickness  $\leq 0.08$  mm single layer
- Conveyor load capacity up to 3 kg



Price & details

#### TECHNICAL DATA

|                   |                                       |                    |                                                               |
|-------------------|---------------------------------------|--------------------|---------------------------------------------------------------|
| Power Supply      | AC 220V / 50-60Hz or 110V / 60Hz      | Motor Power        | 50W                                                           |
| Heating Power     | 300W × 2                              | Sealing Speed      | 0–13 m/min (adjustable)                                       |
| Temperature Range | 0–300°C (adjustable)                  | Max Film Thickness | $\leq 0.08$ mm (single layer)                                 |
| Max Conveyor Load | $\leq 3$ kg                           | Dimensions         | 820 × 385 × 310 mm (W), 820 × 350 × 590 mm (LW), 820 × 510... |
| Net Weight        | 20.2 kg (W), 23 kg (LW), 25.5 kg (LD) |                    |                                                               |

### F150PM Band Sealer with Inkjet Printer for bags up to 3kg – 0–13m/min, 600W

Art. no. **260305**



- F150PM Band Sealer with Inkjet Printer for industrial packaging
- Sealing speed up to 13 meters per minute
- Electronic temperature control adjustable from 0 to 300°C
- Motor power 50W with DC drive system
- Heat tube power 300W × 2 for stable sealing
- Maximum film thickness supported 0.08 millimeters
- Integrated inkjet printer for batch codes and barcodes



Price & details

#### TECHNICAL DATA

|                   |                                 |                   |                     |
|-------------------|---------------------------------|-------------------|---------------------|
| Supply Voltage    | 1P AC 220V/50-60Hz or 110V/60Hz | Motor Power       | 50W                 |
| Heat Tube Power   | 300W × 2                        | Sealing Speed     | 0–13 m/min          |
| Temperature Range | 0–300°C                         | Maximum Thickness | $\leq 0.08$ mm      |
| Loaded Weight     | $\leq 3$ kg                     | Dimensions        | 1000 × 400 × 450 mm |
| Net Weight        | Approx. 42 kg                   |                   |                     |



## Automatic Labeling Machine A175LB – 40-120pcs/min

Art. no. **260350**



Price & details

- Automatic Labeling Machine A175LB designed for flat product surfaces
- Supports product length 40–250mm width 40–200mm height 0.2–100mm
- Handles label width 20–175mm length 6–250mm
- Labeling speed 40–120 pcs per minute adjustable
- Ensures ±1mm labeling accuracy with consistent placement
- Driven by step motor with PLC control
- Rated power 400W efficient continuous operation

### TECHNICAL DATA

|                          |                                  |                          |                                            |
|--------------------------|----------------------------------|--------------------------|--------------------------------------------|
| Type                     | Automatic flat labelling machine | Labelling speed          | 40–120 pcs/min                             |
| Labelling accuracy       | ±1 mm, depending on the product  | Label size               | length 6–250 mm, width 20–175 mm           |
| Product size (L × W × H) | 40–250 × 40–200 × 0.2–100 mm     | Drive                    | step motor, PLC control                    |
| Direction of travel      | left to right                    | Power supply             | 110 V or 220 V, 50–60 Hz                   |
| Power                    | 400 W                            | Machine size (L × W × H) | 1500 × 650 × 1400 mm                       |
| Machine weight           | 260 kg                           | Shipping                 | crated, 2.37 m <sup>3</sup> , 280 kg gross |
| Warranty                 | 12 months                        |                          |                                            |



## Tabletop auto labeling machine T160LB – 30-80pcs/min

Art. no. **260354**



Price & details

- Tabletop auto labeling machine T160LB designed for flat surfaces
- Labeling speed adjustable from 30 to 80 pcs per minute
- Label size supported length 6–250 mm width 20–160 mm
- Product size supported length 40–300 mm width 40–200 mm
- Product height supported from 0.2 mm up to 100 mm
- Power supply compatible 110V or 220V at 50 or 60Hz
- Power consumption efficient operation with approximately 765 watts usage

### TECHNICAL DATA

|                          |                                 |                     |                                                  |
|--------------------------|---------------------------------|---------------------|--------------------------------------------------|
| Type                     | Tabletop flat labelling machine | Labelling speed     | 30–80 pcs/min                                    |
| Labelling accuracy       | ±1 mm, depending on the product | Label size          | length 6–250 mm, width 20–160 mm                 |
| Product size (L × W × H) | 40–300 × 40–200 × 0.2–100 mm    | Label roll          | outer diameter up to 260 mm, core at least 75 mm |
| Drive                    | step motor                      | Direction of travel | left to right                                    |
| Power supply             | 110 V or 220 V, 50–60 Hz        | Power               | about 765 W                                      |
| Machine size (L × W × H) | 1100 × 1000 × 800 mm            | Machine weight      | 130 kg                                           |
| Crate                    | 126 × 92 × 74 cm, 150 kg gross  | Warranty            | 12 months                                        |



## LINEBOX-03 Box packaging Line – 720 boxes/h

Art. no. **280050**



Price & details



- LINEBOX-03 Box Packaging Line processes up to 720 boxes hourly
- Includes automatic case erector AUTOBOX10 for precise carton forming
- Handles cartons from 200–500 mm length and 150–350 mm height
- Equipped with RC2M-D motor-driven roller conveyor speed 18 m/min
- Features RC1M non-driven conveyor for smooth product transfer
- RUBBER automatic taper supports 48–60 mm BOPP or Kraft tape
- Operates with AC 220 V 50 Hz single phase power

### TECHNICAL DATA

|                     |                                                        |                      |                                                |
|---------------------|--------------------------------------------------------|----------------------|------------------------------------------------|
| Case Erector Model  | AUTOBOX10 Automatic Case Erector                       | Erecting Speed       | 10–15 boxes/min (up to 720 boxes/h)            |
| Carton Size Range   | Length 200–500 mm; Width 200–400 mm; Height 150–350 mm | Conveyor Model       | RC2M-D Motor-Driven Roller Conveyor            |
| Conveyor Speed      | 18 m/min                                               | Conveyor Width       | 600 mm                                         |
| Non-Driven Conveyor | RC1M Passive Roller Section, Length 1000 mm            | Box Taper Model      | RUBBER Automatic Box Taper 48–60 mm Tape Width |
| Power Supply        | AC 220 V / 50 Hz / 1 Phase                             | Total Length of Line | Approx. 6.1 m                                  |
| Operating Height    | 650 mm                                                 | Noise Level          | Below 60 dB                                    |



### Flexible conveyor width 460mm, length 1200-4800mm, height 600-1000mm

Art. no. **295001**



Price & details

- Flexible conveyor with wheels
- Conveyor Width: 460mm
- Width 460mm, length 1200-4800mm, height 600-1000mm
- Load capacity: 35kg
- Boost Efficiency and Maximize productivity with our 460mm wide Flexible Conveyor
- Adjustable Length : Adapt to your space with 1200-4800mm length options
- Adjustable Height : Tailor the conveyor to your preferred working height (600-1000mm)

#### TECHNICAL DATA

|                         |                                |                      |                                                               |
|-------------------------|--------------------------------|----------------------|---------------------------------------------------------------|
| Conveyor Width          | 460mm                          | Adjustable Length    | 1200mm – 4800mm (customizable)                                |
| Adjustable Height       | 600mm – 1000mm (customizable)  | Roller Diameter (fi) | 48mm                                                          |
| Load capacity (fi)      | 35kg                           | Axle Diameter (fi)   | 8mm                                                           |
| Wheels                  | Yes                            | Ideal Applications   | Warehouses, Manufacturing, Distribution Centers, Retail, E... |
| Material Handling Types | Various products and materials |                      |                                                               |



### Extend stainless-steel roller conveyor width 550mm, length 1200-5000mm

Art. no. **295005**



Price & details

- Extend stainless-steel roller conveyor with durable construction
- Adjustable length from 1200mm to 5000mm
- 550mm width suitable for medium sized packages
- Height adjustable between 650mm and 800mm
- Load capacity up to 50kg per unit
- Expandable rollers for flexible material handling
- Corrosion resistant stainless steel frame for durability

#### TECHNICAL DATA

|                  |                        |                |                            |
|------------------|------------------------|----------------|----------------------------|
| Length           | 1200–5000mm (flexible) | Width          | 550mm                      |
| Height           | 650–800mm (adjustable) | Frame Material | Stainless Steel            |
| Loading Capacity | 50kg                   | Type           | Expandable Roller Conveyor |
| Maximum Length   | 5m                     |                |                            |



## Motor-drive Roller Conveyor RC2M-D

Art. no. **295112**

- Motor-drive Roller Conveyor RC2M-D ensures efficient material transport
- Dimensions 2050 × 600 mm optimized for industrial applications
- Equipped with integrated electric motor for stable operation
- Operates at 18 m per minute constant speed
- Features 12.5 to 1 gear ratio for precise control
- Constructed from high-strength steel for maximum durability
- Supports heavy load capacity across production environments



Price & details

### TECHNICAL DATA

|                  |                                      |             |                                               |
|------------------|--------------------------------------|-------------|-----------------------------------------------|
| Length × Width   | 2050 × 600 mm                        | Speed       | 18 m/min                                      |
| Motor Gear Ratio | 12.5:1                               | Structure   | Motor-driven roller conveyor with steel frame |
| Roller Material  | High-strength galvanized steel       | Drive Type  | Integrated motor drive                        |
| Noise Level      | Low (<60 dB)                         | Maintenance | Minimal lubrication required                  |
| Weight Capacity  | High load-bearing for industrial use |             |                                               |



## Powered flex conveyor 4m and 6m – 15m/min

Several variants – see below

- Powered Flex Conveyor offers adjustable speed up to 15m/min
- Available in two models: PFC4M/RD (4m) and PFC6M/RD (6m)
- Features a width of 550mm for versatile applications
- Height is adjustable from 650mm to 800mm for flexibility
- Operates on a 220V/50Hz single-phase power supply
- Equipped with an energy-efficient motor consuming only 1kW
- Designed to handle goods weighing up to 50kg efficiently



Price & details

### VARIANTS · LENGTH:

**295201** : 4m

**295202** : 6m

### TECHNICAL DATA

|               |                        |              |                                  |
|---------------|------------------------|--------------|----------------------------------|
| Length        | 4 m or 6 m             | Width        | 550 mm                           |
| Height        | 650–800 mm             | Speed        | up to 15 m/min, adjustable       |
| Load capacity | 50 kg                  | Power supply | 220 V, 50 Hz, single phase, 1 kW |
| Frame         | concertina, on castors |              |                                  |



## Truck unloader conveyor LOADER UL1790 – L790 + 1000cm, W80cm

Art. no. 295301



Price & details

- High-quality Truck unloader conveyor LOADER UL1790 – L790 + 1000cm, W800mm
- The belt conveyor dimensions are L7900mm × W800mm × H1000mm–2400mm
- The roller conveyor measures L10000mm × W800mm × H550mm–820mm
- A heavy-duty hydraulic lifting system ensures stable and reliable operation
- Constructed with stainless steel and Q345 carbon steel materials for durability
- Adjustable height supports compatibility with various trucks and docks
- The multi-wedge belt system handles up to 100kg per section

### TECHNICAL DATA

| Category             | Parameter                  | Specification                 | Remarks                        |
|----------------------|----------------------------|-------------------------------|--------------------------------|
| General Dimensions   | Belt Conveyor Dimensions   | L7900mm × W800mm × H1000mm... | Heavy-duty hydraulic liftin... |
|                      | Roller Conveyor Dimensions | L10000mm × W800mm × H550mm... | Stainless steel multi-wedge... |
| Equipment Parameters | Complete Machine Weight    | 1.08 tons                     | Standard                       |
|                      | Climbing Platform Sections | 3 sections                    | Criteria                       |
|                      | Lower Platform             | 0.8-ton roller frame          | Criteria                       |
|                      | SPH Speed                  | 30 m/min                      | Per project limit              |
|                      | LR Width                   | 600/800mm                     | Criteria                       |
|                      | DD Drum Diameter           | Active 78/Slave 78            | Standard                       |



### Adhesive tape BOPP 48mm/66m brown/transparent – 72units/box

Several variants – see below



Price & details

- High-quality adhesive tape that can withstand temperatures from -20 °C to +60 °C once applied. Apply at 10 °C or warmer, ide...
- Thickness: 50μ (25μ BOPP film + 25μ acrylic adhesive)
- Each box contains 72 units of adhesive tape
- The minimum order quantity is 2 cartons which are 144 units , but prices are lower based on quantity.
- For packages up to 60kg
- Quantity Discount
- High-quality adhesive tape with pressure-sensitive adhesive and BOPP film coating

#### VARIANTS • COLOR

**550521\_01** Transparent

**550531\_01** Brown

#### TECHNICAL DATA

|                                   |                                                                |                  |                    |
|-----------------------------------|----------------------------------------------------------------|------------------|--------------------|
| Material                          | BOPP Film                                                      | Glue Type        | Acrylic            |
| Adhesion to Steel Sheet (peeling) | ≥ 4.5 N/25mm                                                   | Tensile Strength | 35 N/cm            |
| Elongation (hold)                 | ≥ 150%                                                         | Thickness        | 0.050 mm (50μm)    |
| Flame Resistance                  | S (ASTMD1000)                                                  | Color            | Transparent, Brown |
| Temperature Rating                | -20°C to 60°C once applied. Apply at 10°C or warmer, ideall... | Shelf Life       | 12 months          |



## Adhesive tape BOPP 48mm/66m brown/transparent – pallet – 3024 units

Several variants – see below

- Adhesive tape BOPP 48mm/66m brown/transparent – one pallet – 3024 units
- Total thickness: 50µm (25µm + 25µm)
- Strong adhesion ( $\geq 4.5$  N/25mm) for secure and lasting bonding
- Versatile 50µm tape for fixing, packaging, and sealing needs
- Durable (35 N/cm tensile strength) and flexible ( $\geq 150\%$  elongation)
- Temperature resistant (-20°C to 60°C) for reliable performance
- Compliant with safety standards (ROHS directives) for user peace of mind



Price & details

### VARIANTS · COLOR

550521\_02 Transparent

550531\_02 Brown

### TECHNICAL DATA

|                                   |                                                             |                  |                    |
|-----------------------------------|-------------------------------------------------------------|------------------|--------------------|
| Material                          | BOPP Film                                                   | Glue Type        | Acrylic            |
| Adhesion to Steel Sheet (peeling) | $\geq 4.5$ N/25mm                                           | Tensile Strength | 35 N/cm            |
| Elongation (hold)                 | $\geq 150\%$                                                | Thickness        | 0.050 mm (50µm)    |
| Flame Resistance                  | S (ASTMD1000)                                               | Color            | Transparent, Brown |
| Temperature Rating                | -20°C to 60°C                                               | Shelf Life       | 12 months          |
| Application                       | Fixing, Packaging, Carton Sealing, Temporary Fixation, etc. |                  |                    |



## Stretch film 500 mm/23 my – 5 kg – 120 units – 1 pallet/600 kg

Art. no. 550601\_02

- Stretch film 500 mm/23 my manufactured from LLDPE cast film
- 23 micron thickness suitable for standard industrial pallet loads
- 500 mm film width optimized for efficient manual wrapping
- 5 kg roll weight with controlled tolerance for inventory planning
- Horizontal stretch up to 600 percent for reduced material consumption
- Longitudinal stretch up to 300 percent supporting stable load containment
- 26 MPa longitudinal tear resistance for transport stability



Price & details

### TECHNICAL DATA

|                           |                         |                    |                |
|---------------------------|-------------------------|--------------------|----------------|
| Material                  | LLDPE                   | Film type          | Cast film      |
| Thickness                 | 23 micron               | Width              | 500 mm         |
| Density                   | 0.921 g/cm <sup>3</sup> | Roll weight        | 5 kg $\pm 3\%$ |
| Color                     | Transparent             | Cohesion (inside)  | 80%            |
| Cohesion (outside)        | 20%                     | Core material      | Paper          |
| Core diameter             | 76 mm                   | Core weight        | 1.65 kg        |
| Roll length (reel length) | 510 mm                  | Horizontal stretch | 600%           |



## 40x Hand Stretch Film 500mm/23my – (3 kg) – carton/6 pcs – transparent – 1 pallet

Art. no. **550603\_01**

- Stretch film 500mm/23my manual LLDPE cast film for pallet wrapping
- Film width 500 mm suitable for EUR and industrial pallets
- Thickness 23 my ensures reliable load stability
- Elongation in use up to 160 percent
- Tensile strength MD 32 N/mm<sup>2</sup> for secure containment
- Tensile strength TD 20 N/mm<sup>2</sup> reduces tearing risk
- Roll length 212 meters for predictable consumption



Price & details

### TECHNICAL DATA

|                  |                                                                          |                     |                         |
|------------------|--------------------------------------------------------------------------|---------------------|-------------------------|
| Width            | 500 mm ± 2 %                                                             | Thickness           | 23 µm ± 1 µm            |
| Film per roll    | 212 m                                                                    | Roll weight (gross) | 3.0 kg                  |
| Core             | paper, 510 mm long, 50 mm inside, 0.75 kg                                | Elongation in use   | 160 % ± 10 %            |
| Tensile strength | 32 N/mm <sup>2</sup> lengthwise, 20 N/mm <sup>2</sup> crosswise (± 10 %) | Density             | 0.921 g/cm <sup>3</sup> |
| Cohesion         | 80 % inside, 20 % outside                                                | Colour              | transparent             |
| Packing          | 6 rolls per carton, 40 cartons = 240 rolls per pallet                    | Standard            | MSZ 10386:1989          |
| Shelf life       | 6 months, stored dry at room temperature                                 |                     |                         |



## Stretch film – 500mm/23my – 16 kg – for pallet wrapping machine

Several variants – see below

- Machine stretch film for pallet wrapping machines
- Width 500 mm , thickness 23 µm
- 16 kg of film per roll
- LLDPE, stretches and pulls back
- Two versions: Standard A and PRESTRETCH POWER
- Fits machines running 500 mm film on a 76 mm core
- Recyclable where LLDPE is taken



Price & details

### VARIANTS · TYPE:

**550608\_01** : REGULAR – Standard A

**550609\_01** : PRESTRETCH – POWER

### TECHNICAL DATA

|                 |                                               |               |                                            |
|-----------------|-----------------------------------------------|---------------|--------------------------------------------|
| Width           | 500 mm                                        | Thickness     | 23 µm                                      |
| Film per roll   | 16 kg                                         | Material      | LLDPE                                      |
| Versions        | Standard A, PRESTRETCH POWER                  | Core          | 76 mm on our SMARTWRAP X2 machines         |
| Use             | machine wrapping, with or without pre-stretch | UV protection | limited; use a UV-stabilised film outdoors |
| Box (L × W × H) | 30 × 30 × 50 cm, 16 kg                        |               |                                            |



**Machine stretch film, 500mm/23my –  
Standard A – machine – 736 kg – pallet – 46  
pieces x 16kg**

Art. no. 550608\_02



Price & details



**Machine PRESTRETCH stretch film  
500mm/23my power – 736kg – 1 pallet – 46  
pieces x 16kg**

Art. no. 550609\_02



Price & details



## POF shrink film – Heat shrink wrap – 15my – Width 200-550mm

Several variants – see below

- POF (Polyolefin) shrink film: the versatile packaging solution for quality and compliance



Price & details

### VARIANTS • SELECT WIDTH:

**550655** : 200mm -15my;1259m;500m2

**550660** : 500mm – 15my;1335m;1335m2

**550665** : 550mm – 15my;1335m;1468m2



## Kraft paper tape 50mm 50m – 72 units

- Self-adhesive kraft paper tape
- Width 50 mm , length 50 m per roll
- 72 rolls per box , 3600 m in total
- Natural rubber (solvent-based) adhesive
- Recyclable with the cardboard
- Holds on recycled cardboard, leaves no residue
- For carton sealers 48–72 mm and hand dispensers



Price & details

### TECHNICAL DATA

|                  |                                |                 |                                                   |
|------------------|--------------------------------|-----------------|---------------------------------------------------|
| Width            | 50 mm                          | Length per roll | 50 m                                              |
| Rolls per box    | 72                             | Tape per box    | 3600 m                                            |
| Adhesive         | natural rubber (solvent-based) | Material        | kraft paper, recyclable                           |
| Water resistance | not waterproof                 | Machines        | carton sealers for 48–72 mm tape, hand dispensers |
| Colour           | brown, unprinted               |                 |                                                   |



## Paper baler TONNA5, 5 tons, 50kN, bale 40kg

Art. no. **440010**



Price & details

- Affordable & low maintenance Paper baler TONNA5
- Pressure: 5 tons
- Motor: 1.1 kW (single phase)
- Bale dimensions are 500 x 700 x 500 mm (H x W x D)
- Bale Weight: up to 40kg
- Output: 6-8package/hours
- Ideal for locations where space and height are restricted

### TECHNICAL DATA

|                   |                                          |                |               |
|-------------------|------------------------------------------|----------------|---------------|
| Height            | 1.750 m                                  | Width          | 0.950 m       |
| Depth             | 0.750 m                                  | Weight         | 350–400 kg    |
| Transportation Ht | 1.40 m                                   | Power Supply   | 220 V, 50 Hz  |
| Motor             | (single phase) 1.1 kw                    | Pressing Force | up to 5 Ton   |
| Noise Level       | 68 decibels                              | Height         | 0.500 m       |
| Width             | 0.700 m                                  | Depth          | 0.500 m       |
| Weight            | up to 40 kg (Depending On Material Used) | Cycle Times    | 40–45 seconds |



## Recycling baler TONNA10, 10 tons, 100kN, bale 80kg

Art. no. **440020**



Price & details

- Affordable & low maintenance Recycling baler TONNA10
- Pressure: 10 tons
- Motor: 1,5 kW Single Oil cylinder
- Power Supply: 220 – 230 V, 1,5 kW 13 Amp
- Bale dimensions: 700mm X 500 x 1000 mm (W x D x H)
- Bale Weight: 70-80kg
- Output: 6-8package/hours

### TECHNICAL DATA

|              |                                   |                               |                                |
|--------------|-----------------------------------|-------------------------------|--------------------------------|
| Pressure     | 10T                               | Motor                         | 1,5 KW                         |
| Bale Size    | 700mm x 500 x 1000 mm (W x D x H) | Bale Weight                   | 30-80kg                        |
| Output       | 6-8 package/hours                 | Weight of the Cardboard baler | 270 kgs                        |
| Machine size | 1050 x 730 x 2300 mm (W x D x H)  | Voltage                       | 220 – 230 V, 1,5 phase, 13 Amp |



## Vertical baler TONNA20, 20 tons, 200kN, bale 150 kg

Art. no. **440030**



Price & details

- A vertical baller with 20 tons pressure TONNA20 will dramatically lower waste cost and space savings in your facilities.
- An automatic bale extraction system
- Can bale 150 kgs of waste materials
- Bale dimensions: 975 mm x 800 x 1000 mm (W x D x H)
- 6-8 package/hours
- Machine size: 1560 mm\*1030 mm\*2600 mm (W x D x H)
- Ideal for locations where space and height are restricted

### TECHNICAL DATA

|                       |                                               |                |                            |
|-----------------------|-----------------------------------------------|----------------|----------------------------|
| Height                | 2600 mm                                       | Width          | 1560 mm                    |
| Depth                 | 1030 mm                                       | Weight         | 780 kg                     |
| Transportation Height | 1955 mm                                       | Power Supply   | 220 – 240 V (single-phase) |
| Motor                 | 2.2 KW, 16 Amp                                | Pressing Force | Up to 20 Ton               |
| Noise Level           | 72 decibels                                   | Height         | 1000 mm                    |
| Width                 | 975 mm                                        | Depth          | 800 mm                     |
| Weight                | Up to 150 kg – depending on the material used | Cycle Times    | 40 seconds                 |



## Vertical baler TONNA25, 25 tons, 250kN, bale 250 kg

Art. no. **440040**



Price & details

- A vertical baler with 25 tons of pressure TONNA25 will dramatically lower waste costs and space savings in your facilities.
- An automatic bale extraction system
- Can bale 250 kgs of waste materials
- Bale dimensions: 1000 mm x 800 mm x 800 mm (W x D x H)
- 6-8 package/hours
- Machine size: 1500 mm\*1100 mm\*2650 mm (W x D x H)
- Ideal for locations where space and height are restricted

### TECHNICAL DATA

|                       |                                               |                |                      |
|-----------------------|-----------------------------------------------|----------------|----------------------|
| Height                | 2650 mm                                       | Width          | 1500 mm              |
| Depth                 | 1100 mm                                       | Weight         | 750 kg               |
| Transportation Height | 1955 mm                                       | Power Supply   | 230 V (single-phase) |
| Motor                 | 2,2 KW, 16 Amp                                | Pressing Force | Up to 25 Ton         |
| Noise Level           | 72 decibels                                   | Height         | 800 mm               |
| Width                 | 1000 mm                                       | Depth          | 800 mm               |
| Weight                | Up to 250 kg – depending on the material used | Cycle Times    | 40 seconds           |



## Waste baler TONNA45, 45 tons, 450kN, bale 450 kg

Art. no. **440060**



Price & details

- Waste baler 45 tons TONNA45 can be used for pressing aluminum, plastic, paper, cartons, plastic bottles, stretch film, and...
- Pressing Power of 450 kN or 45 tonnes
- Bale Weight: 450kg
- Produces a Euro pallet size – bale dimensions are 1000 x 1200 x 800 mm (H x W x D)
- Ideal for large amounts of material
- Dual cylinders for even compaction of waste material
- A fully automated bale ejector simplifies the removal of the bale

### TECHNICAL DATA

|                       |                                               |                |                       |
|-----------------------|-----------------------------------------------|----------------|-----------------------|
| Height                | 2900 mm                                       | Width          | 1800 mm               |
| Depth                 | 1200 mm                                       | Weight         | 1300 kg               |
| Transportation Height | 2250 mm                                       | Power Supply   | 380 – 400 V (3-phase) |
| Motor                 | 7.5 KW 16 Amp                                 | Pressing Force | Up to 45 Ton          |
| Noise Level           | 72 decibels                                   | Height         | 1000 mm               |
| Width                 | 1200 mm                                       | Depth          | 800 mm                |
| Weight                | Up to 450 kg – depending on the material used | Cycle Times    | 50 seconds            |



## Film and Paper baler machine HSM V-Press 60

Art. no. **440110**



Price & details

- The lever action allows the HSM V-Press 60 to produce well compressed, stackable bales – compression 5:1 and more
- Effortless to operate with a minimum amount of strength
- Does not need any electricity, servicing, or maintenance
- Save on waste costs
- Collect and compact right where the material is
- Mobile and handy
- The minimum amount of strength. Compact bales up to 40 kg

### TECHNICAL DATA

|                          |                                      |                                      |                          |
|--------------------------|--------------------------------------|--------------------------------------|--------------------------|
| Height                   | 1280 mm                              | Width                                | 810 mm                   |
| Depth                    | 735 mm                               | Pressed material                     | Film, packaging material |
| Number of bales per hour | 3                                    | Bale height max.                     | 800 mm                   |
| Bale width               | 600 mm                               | Ball depth                           | 800 mm                   |
| Delivery conditions      | Fully assembled and ready to be used | Feed opening width                   | 740 mm                   |
| Fill opening height      | 1015 mm                              | Strapping                            | Thread                   |
| Number of straps         | 3                                    | Bale weight max., Depending on th... | 40 kg                    |



## Small cardboard baler HSM V-Press 503 eco 3T, 30KN, bale weight 50kg

Art. no. **440120**



Price & details

- Vertical Cardboard Baler HSM V-Press 503 eco
- Pressing power of 3 tons or 30 KN
- It can make bale up to 50kg
- Made in Germany – High-quality product
- Fast EU Delivery
- Suitable both for cardboard as well as plastic foil
- Bale removal and transport with discharge trolley

### TECHNICAL DATA

|                                      |                            |                                     |                            |
|--------------------------------------|----------------------------|-------------------------------------|----------------------------|
| Pressing power in kN                 | 30                         | Motor in kW                         | 1.1                        |
| Voltage / Frequency                  | 1 x 230 V / 50 Hz          | Loading aperture W x H in mm        | 700 x 470                  |
| Bale weight in kg (depending on m... | 30 – 50                    | Bale size L x W x H in mm           | 700 x 500 x max. 600 – 850 |
| Cycle time in idle operation in s... | 27                         | Acoustic level in dB(A)             | 72.1                       |
| Press chamber size W x D x H in mm   | 700 x 500 x 1050           | Dimensions of machine* W x D x H... | 953 x 679 x 1962           |
| Transport dimensions of machine W... | 953 x 679 x 1962           | Machine weight in kg                | 245                        |
| Strapping                            | 2-fold with polyester tape |                                     |                            |



## Cardboard box baler HSM V-Press 504 4T, 40 kN, bale weight 60kg

Art. no. **440130**



Price & details

- Cardboard box baler HSM V-Press 504
- Pressing power of 4T or 40 kN
- Bale weight 60kg
- Double door with bell-crank lever
- Compact and sturdy design
- Small footprint
- Modern microprocessor controller with membrane keypad and text display

### TECHNICAL DATA

|                                       |                                   |                                     |                             |
|---------------------------------------|-----------------------------------|-------------------------------------|-----------------------------|
| Pressing power in kN                  | <b>40</b>                         | Motor in kW                         | <b>1.1</b>                  |
| Voltage / Frequency                   | <b>1 x 230 V / 50 Hz</b>          | Loading aperture W x H in mm        | <b>700 x 470</b>            |
| Bale weight in kg (depending on m...) | <b>60</b>                         | Bale size L x W x H in mm           | <b>700 x 500 x max. 600</b> |
| Cycle time in idle operation (the...) | <b>27</b>                         | Acoustic level in dB(A)             | <b>64.3</b>                 |
| Press chamber size W x D x H in mm    | <b>700 x 500 x 1020</b>           | Dimensions of machine* W x D x H... | <b>1020 x 812 x 1922</b>    |
| Transport dimensions of machine W...  | <b>1020 x 812 x 1922</b>          | Machine weight in kg                | <b>290</b>                  |
| Strapping                             | <b>2-fold with polyester tape</b> |                                     |                             |



## Cardboard bale recycling HSM V-Press 605 eco (400V) with bale ejector 5.7T, 57 kN, bale weight 70kg

Art. no. **440141**



Price & details

- Pressing power of 5.7 tons or 57 kN
- It can make bale up to 70 kg
- Made in Germany – High-quality product
- Fast EU Delivery
- Plug and play – easy to install and simple to use
- Double door with hand wheel door lock incl. operating manual/declaration of conformity
- Low installation height and surface

### TECHNICAL DATA

|                                       |                                   |                                     |                             |
|---------------------------------------|-----------------------------------|-------------------------------------|-----------------------------|
| Pressing power in kN                  | <b>57</b>                         | Motor in kW                         | <b>1.5</b>                  |
| Voltage / Frequency                   | <b>1 x 230 V / 50 Hz</b>          | Loading aperture W x H in mm        | <b>800 x 495</b>            |
| Bale weight in kg (depending on m...) | <b>up to 70</b>                   | Bale size L x W x H in mm           | <b>800 x 600 x max. 600</b> |
| Cycle time in idle operation (the...) | <b>21</b>                         | Acoustic level in dB(A)             | <b>60.1</b>                 |
| Press chamber size W x D x H in mm    | <b>800 x 600 x 1045</b>           | Dimensions of machine* W x D x H... | <b>1198 x 823 x 1986</b>    |
| Transport dimensions of machine W...  | <b>1198 x 823 x 1986</b>          | Machine weight in kg                | <b>485</b>                  |
| Strapping                             | <b>3-fold with polyester tape</b> |                                     |                             |



## Waste baler HSM V-Press 610 eco 12 tons, 120 kN 100kg bales

Art. no. **440150**



Price & details

- Pressing power of 12 tons or 120 kN
- Bale weight: up to 100 kg (depending on material)
- Bale size: L 800 x W 600 x H max. 600 mm
- Made in Germany – High-quality product
- Fast EU Delivery
- Plug and play – easy to install and simple to use
- Dimensions: 1198 x 823 x 1986 mm (Width x Depth x Height:)

### TECHNICAL DATA

|                                      |                      |                                      |                       |
|--------------------------------------|----------------------|--------------------------------------|-----------------------|
| Pressing power                       | 120 kN               | Specific pressing power              | 25 N/cm <sup>2</sup>  |
| Driving power                        | 3 kW                 | Voltage / Frequency                  | 400 V / 50 Hz         |
| Cycle time when idling               | 22 s                 | Volume throughput in idle operati... | 2,5 m <sup>3</sup> /h |
| Loading height                       | 655 mm               | Loading aperture width x height      | 800 x 495 mm          |
| Bale length x Bale width x Bale h... | 800 x 600 x 600 mm   | Bale weight (up to)                  | 100 kg                |
| Width x Depth x Height               | 1198 x 823 x 1986 mm | Weight                               | 540 kg                |
| Method of strapping                  | vertical             | Number of strappings                 | 3                     |



## Industrial cardboard baler HSM V-Press 818 plus 18,5 tons, 185kN, 200kg bales

Art. no. **440170**



Price & details

- Industrial Cardboard Baler HSM V-Press 818 plus 185kN, 200kg Bales
- Pressing power of 18,5 tons or 185 kN
- Bale weight: up to 200 kg (depending on material)
- Bale size: L 1200 x W 780 x H max. 700 mm
- Made in Germany – High-quality product
- Fast EU Delivery
- Plug and play – easy to install and simple to use

### TECHNICAL DATA

|                                      |                       |                                      |                                                              |
|--------------------------------------|-----------------------|--------------------------------------|--------------------------------------------------------------|
| Pressing power                       | 185 kN                | Specific pressing power              | 19,23 N/cm <sup>2</sup>                                      |
| Driving power                        | 4 kW                  | Voltage / Frequency                  | 400 V / 50 Hz                                                |
| Cycle time when idling               | 27 s                  | Volume throughput in idle operati... | 5 m <sup>3</sup> /h                                          |
| Loading height                       | 958 mm                | Loading aperture width x height      | 1195 x 540 mm                                                |
| Bale length x Bale width x Bale h... | 1200 x 780 x 700 mm   | Bale weight (up to)                  | 200 kg                                                       |
| Width x Depth x Height               | 1709 x 1248 x 2370 mm | Weight                               | 1173 kg                                                      |
| Type of consumables                  | Strapping tape        | Press material                       | Punch waste/residue, Cardboard, Mixed paper, Plastic film... |



## TONNA garbage baler 240L – 2 tons pressing force

Art. no. **440250**

- TONNA 240L Bin Press for waste compaction
- Compact cardboard, plastic, and soft materials
- Efficient 1.5kW motor with quick cycle
- Noise level of 72 decibels
- Durable design with 1-year warranty
- Easy-to-use controls for safe operation
- Suitable for small to medium businesses



Price & details

### TECHNICAL DATA

|              |                              |                        |                                 |
|--------------|------------------------------|------------------------|---------------------------------|
| Bins         | 240 l                        | Pressing force         | up to 2 t                       |
| Cycle time   | 20 s                         | Motor                  | 1.5 kW                          |
| Power supply | single phase 220–240 V, 16 A | Hydraulic oil          | 14 l, Mobil DTE24 or equivalent |
| Noise level  | 72 dB                        | Dimensions (W × D × H) | 780 × 780 × 2360 mm             |
| Weight       | 235 kg                       | Warranty               | 1 year                          |



## TONNA1100 bin press E1100L – 3 ton pressing force

Art. no. **440260**

- TONNA1100 bin press is efficient Waste Compaction Solution
- Pressing force up to 3 tons
- Compact up to 1100 Liters of Material
- Robust and Space-Saving Design
- Single-Phase Power for Easy Operation
- 1.5 kW Motor for Effective Pressing
- Pressing plate 660 x 1000 mm



Price & details

### TECHNICAL DATA

|                |                                |                  |                                           |
|----------------|--------------------------------|------------------|-------------------------------------------|
| Machine Type   | Hydraulic                      | Maximum Capacity | 1100 Liters                               |
| Height         | up to 1900 mm (maximum height) | Width            | 980 mm                                    |
| Depth          | 1200 mm                        | Weight           | 235 kg                                    |
| Power Supply   | Single Phase 230V              | Motor Power      | 1.5 kW                                    |
| Pressing Force | Up to 3 tonnes                 | Noise Level      | 68 decibels                               |
| Pressing plate | 660 x 1000 mm                  | Oil Requirement  | 8 liters, oil according to ISO/DIN 6743/4 |



### Box baler TONNA E60 3 tons, 30kN, bale 60kg

Art. no. 440300



Price & details

- Automatic mode : When the upper door is closed, the automatic baling process begins.
- Produces cardboard bales weighing 30-50 kg and plastic foil bales weighing 40-60 kg .
- 2 modes of operation for cardboard and plastic foil
- Full bale indication system for easy handling
- Compact bale dimensions of 70 x 50 x 70 cm
- Powerful 1.5 kW engine with 3 tons of pressing force
- 27-second cycle time for efficient operation

#### TECHNICAL DATA

|                    |                                          |                           |                                   |
|--------------------|------------------------------------------|---------------------------|-----------------------------------|
| Type               | Vertical waste baler, cardboard and film | Pressing force            | 3 t (30 kN)                       |
| Bale size          | 70 × 50 × 70 cm                          | Bale weight               | cardboard 30–50 kg, film 40–60 kg |
| Cycle time         | 27 s, 0.008 kWh per cycle                | Motor                     | 1.5 kW                            |
| Supply voltage     | 230 V, 11 A                              | Recommended protection    | C 16                              |
| Protection degree  | IP56                                     | Hydraulic cylinder stroke | 600 mm                            |
| Hydraulic pressure | 0–95 bar, maximum 100 bar                | Oil tank                  | 8 L, class ISO/DIN 6743/4         |
| Noise level        | 68 dB at 1 m                             | Machine size (L × W × H)  | 83 × 70 × 193 cm                  |



### Cardboard Baler TONNA E80 PLC 4 tons, bale 80kg

Art. no. 440310



Price & details

- TONNA E80 PLC industrial cardboard baler for efficient waste management
- Automatic operation initiates baling cycle upon closing upper door
- Pressing force up to 4 tons ensures high compaction
- Robust 1.5 kW engine provides reliable power performance
- Operates on standard 230 V power supply for compatibility
- Press dimensions 93 x 64 x 210 cm enable space optimization
- Bale dimensions 80 x 40 x 80 cm for uniform compaction

#### TECHNICAL DATA

|                           |                                    |                    |                                                |
|---------------------------|------------------------------------|--------------------|------------------------------------------------|
| Type                      | Vertical baler, cardboard and film | Pressing force     | up to 4 t                                      |
| Bale size                 | 80 × 40 × 80 cm                    | Bale weight        | cardboard 40–60 kg, film 50–70 kg, up to 75 kg |
| Feed opening              | 80 × 55 cm                         | Cycle time         | 27 s                                           |
| Motor                     | 1.5 kW                             | Supply voltage     | 230 V, 11 A                                    |
| Recommended protection    | C 16                               | Protection degree  | IP56                                           |
| Hydraulic cylinder stroke | 600 mm                             | Hydraulic pressure | 0–95 bar, maximum 100 bar                      |
| Oil tank                  | 8 l, class ISO/DIN 6743/4          | Noise level        | 68 dB at 1 m                                   |



## Film and Paper baler machine TONNA T-Portable

Art. no. **440330**



Price & details

- On-the-Spot Compression : Effortlessly compress materials immediately at the source, eliminating the need for interim storage
- Stackable Bales: Lever action produces well-compressed, stackable bales with a 5:1 compression ratio
- Effortless Operation : User-friendly design requires minimal strength for easy waste management
- Electricity-Free and Low Maintenance : Reliable and sustainable, no electricity dependency, and minimal maintenance
- Repress Capability: Bales can be repressed in hydraulic TONNA baling presses for denser and larger bales
- Generous Loading Aperture: Efficiently processes materials with a 740 x 640 mm loading aperture
- Bales can weighing up to 40 kg

### TECHNICAL DATA

|                           |                                           |                                       |                                       |
|---------------------------|-------------------------------------------|---------------------------------------|---------------------------------------|
| Loading Aperture (WxH)    | 740 x 640 mm                              | Bale Weight (depending on the mat...) | Up to 40 kg                           |
| Bale Size (LxWxH)         | 800 x 600 x max. 800 mm                   | Machine Dimensions (WxDxH)            | 820 x 740 x 1400 mm                   |
| Machine Weight            | 100 kg                                    | Strapping                             | 3-fold crosswise with strapping twine |
| Durability and Sturdiness | Robust construction for continuous use    | Portability                           | Lightweight design for easy mobility  |
| Eco-Friendly Solution     | Minimizes interim storage, no electricity |                                       |                                       |

## Cardboard perforator machine HSM ProfiPack C400

Art. no. **450010**



Price & details



- High-quality Made in Germany Paper Shredder HSM ProfiPack C400 –
- 2 Year Warranty
- Fast Delivery
- Cutting rollers made of hardened solid steel
- Powerful drive allows continuous operation
- The adjustable cushioning volume of the packaging material
- Infinitely adjustable working width with scale for cushioning material made to measure

### TECHNICAL DATA

|                     |                      |                     |                                                         |
|---------------------|----------------------|---------------------|---------------------------------------------------------|
| Grid dimension      | 6 x 60 mm            | Cutting capacity    | 1 layer                                                 |
| Operating speed     | 8,0 m/min            | Working width       | 415 mm                                                  |
| Infeed height 10 mm | 10 mm                | Power supply        | 100 V / 60 Hz 230 V / 50 Hz 120 V / 60 Hz 220 V / 60 Hz |
| Operating mode      | Continuous operation | Motor power         | 800 W / 625 W / 855 W / 660 W                           |
| Temperature         | -10 °C up to +25 °C  | relative humidity   | max. 90%, non-condensing                                |
| Noise emission      | 66 – 68 dB(A)        | (idle / under load) | 68 – 70 dB(A)                                           |
| Size W x D x H (mm) | 610 x 395 x 375      | Weight              | 47 kg                                                   |



## Cardboard shredder HSM ProfiPack P425

Art. no. **450020**

- High-Quality Cardboard Shredder HSM ProfiPack P425
- Made in Germany
- 2 Years Warranty
- Solid steel cutting rollers
- Variable cushioning volume
- Adjustable working width as required
- The intuitive operator control panel with LED indicators



Price & details

### TECHNICAL DATA

|                     |                      |                     |                                          |
|---------------------|----------------------|---------------------|------------------------------------------|
| Grid dimension      | 5 x 100 mm           | Cutting capacity    | Up to 3 positions                        |
| Operating speed     | 8.5 – 14.0 m/min     | Working width       | 425 mm                                   |
| Infeed height       | 20 mm                | Power supply        | 230 V, 50 Hz 120 V / 60 Hz 220 V / 60 Hz |
| Operating mode      | Continuous operation | Motor power max.    | 1.4 kW                                   |
| Temperature         | -10 °C up to +25 °C  | Relative humidity   | max. 90%, non-condensing                 |
| Noise emission      | 60 – 62 dB(A)        | (idle / under load) | 66 – 67 dB(A)                            |
| Size W x D x H (mm) | 770 x 570 x 1040     | Weight              | 160 kg                                   |



## Cardboard shredder GREE XS 420mm

Art. no. **450030**

- Cardboard shredder GREE XS 420mm
- Compact and versatile design
- Processes multi-layer cartons or cardboard up to 10 mm thick
- Creates bent mat up to 420 mm wide for filling parcels
- Cutting rollers ensure neat and uniform packaging material
- Controlled by a rocker switch with 3 options (On, Off, Reverse)
- Low noise and vibration



Price & details

### TECHNICAL DATA

|                  |                                                        |                |                                     |
|------------------|--------------------------------------------------------|----------------|-------------------------------------|
| Processing       | Multi-layer cartons or cardboard up to 10 mm thickness | Material       | Non-applicable cardboard waste      |
| Filling Material | Creates a bent mat up to 420 mm in width               | Drive          | Single-phase motor                  |
| Motor Protection | Thermal fuse                                           | Switch Type    | Rocker switch (On, Off, Reverse)    |
| Cutting Capacity | 1 layer                                                | Feed Width     | 420 mm                              |
| Feed Height      | 10 mm                                                  | Shredder Speed | 5.5 m/min                           |
| Structure        | Strong metal structure                                 | Safety         | Complies with EU safety regulations |
| Size             | Portable tabletop machine                              | Noise Level    | Low noise and vibration             |



## Cardboard shredder machine GREE ES 422mm

Art. no. **450040**



Price & details

- Cuts up to 420mm wide and up to 18mm thick cardboards
- Produces up to 6.0cu.m/hr void-lill with an unlimited run time
- ES version produces flexible matting and ESS version produces 4mm wide cut strips
- Can be fitted with a dust reduction unit
- Dimensions: W660mm x D660mm x H1060mm, weight: 120kgs, footprint: 0.5sq m, Power: 220-240v
- Single Pass Operation
- Emergency Stop Switch

### TECHNICAL DATA

|                          |                       |                        |                   |
|--------------------------|-----------------------|------------------------|-------------------|
| Motor Capacity           | 1,5KW/2 HP/3Phase     | Voltage/Frequency      | 220-240V/50-60 Hz |
| Intake Width             | 425 mm                | Inlet Height           | 18 mm             |
| Feed Rate                | 0.21 m/sec    13m/min | Production Output      | 6 cu.m/hr         |
| Cutting Width – padding  | 420 mm, 2-3 Layers    | Cardboard Thickness    | Up to 20mm        |
| Loading Width            | Endless               | Runtime                | Unlimited         |
| Dimensions (W x D x H)   | 660 x 660 x 980 mm    | Packaging Weight       | 140 kg            |
| Noise emission with Load | 68 dB(A)              | Noise emission no Load | 60 dB(A)          |



## SMITH Battery Operated Stacker 2.5m 250cm 1500 kg

Art. no. **770010**

- Affordable electric pallet stapler & low maintenance
- Fork size: 570\*1150mm – for EURO pallet
- Ergonomic – very stable
- Load capacity 1500 kg or 1.5t
- 12 months' warranty
- Lifting height: 2,5m or 2500mm
- Easy to use and simple to be adjusted



Price & details

### TECHNICAL DATA

Model: SMITH electric stack...

1525

|                          |            |            |
|--------------------------|------------|------------|
| Power unit               |            | Electric   |
| Operation                |            | Pedestrian |
| Rated traction weight    | kg         | 1500       |
| Load center              | c (mm)     | 600        |
| Axle center to fork face | x (mm)     | 720        |
| Wheelbase                | y (mm)     | 1167       |
| Wheels type              |            | PU         |
| Driving wheels size      | Ø x w (mm) | Ø210 x 70  |

**SMITH Pallet Stacker 3,5 m 350 cm 1500 kg**Art. no. **770020**

- Affordable electric pallet stapler & low maintenance
- Fork size: 570\*1150mm – for EURO pallet
- Ergonomic – very stable
- Load capacity 1500 kg or 1.5t
- 12 months' warranty
- Lifting height: 350cm or 3500mm
- Easy to use and simple to be adjusted



Price &amp; details

**TECHNICAL DATA**

Model: SMITH electric stack...

**1535**

|                          |            |            |
|--------------------------|------------|------------|
| Power unit               |            | Electric   |
| Operation                |            | Pedestrian |
| Rated traction weight    | kg         | 1500       |
| Load center              | c (mm)     | 600        |
| Axle center to fork face | x (mm)     | 720        |
| Wheelbase                | y (mm)     | 1167       |
| Wheels type              |            | PU         |
| Driving wheels size      | Ø x w (mm) | Ø210 x 70  |

**Pallet Lift Stacker SMITH S-Ride with Stand 2.6m 260cm 1500 kg**Art. no. **770030**

- Affordable electric pallet stapler with stand and side arms & low maintenance
- Fork size: 570\*1150mm – for EURO pallet
- Ergonomic – very stable
- Load capacity 1500 kg or 1.5t
- 12 months' warranty
- Lifting height: 260cm or 2600mm
- Easy to use and simple to be adjusted



Price &amp; details

**TECHNICAL DATA**

Power unit

**electric**

|                             |              |         |
|-----------------------------|--------------|---------|
| Operation                   | pedestrian   |         |
| Rated traction weight Q     | 1500         | kg      |
| Load centre c               | 600          | mm      |
| Axle centre to fork face x  | 695          | mm      |
| Wheel base y                | 1148         | mm      |
| Service weight with battery | 690          | kg      |
| Wheels type                 | polyurethane |         |
| Driving wheel size Φ        | Φ210×70      | Φ×w(mm) |



## SMITH Electric Stacker Forklift Stand-on S-Ride 3.6m 360cm 1500 kg

Art. no. **770040**

- Electric Stand-on pallet stacker + 2 batteries (2\*12V/120AH) + charger (24V/10A, European standard)
- Load capacity: 1500 kg
- Lifting height: 360 cm or 3600 mm
- Easy to use and simple to be adjusted
- Battery Level Indicator
- Load capacity on max. height: 700 kg
- Load center distance: 600 mm



Price & details

### TECHNICAL DATA

#### Model

#### SMITH Electric Stand-on Sta...

|                             |              |    |
|-----------------------------|--------------|----|
| Power unit                  | electric     |    |
| Operation                   | pedestrian   |    |
| Rated traction weight Q     | 1500         | kg |
| Load center c               | 600          | mm |
| Axle center to fork face x  | 695          | mm |
| Wheelbase y                 | 1148         | mm |
| Service weight with battery | 730          | kg |
| Wheels type                 | polyurethane |    |



## SMITH Electric pallet truck 1500 kg 200mm

Art. no. **770050**

- Affordable electric pallet truck SMITH & low maintenance
- Fork size: 560\*1150mm – for EURO pallet
- Ergonomic – very stable
- Load capacity 1500 kg or 1.5t
- 12 months' warranty
- Lifting height: 200mm
- Easy to use and simple to be adjusted



Price & details

### TECHNICAL DATA

#### Model SMITH electric pallet...

#### Unit

#### 15

|                     |    |      |
|---------------------|----|------|
| Load capacity       | kg | 1500 |
| Fork length         | mm | 1150 |
| Overall fork width  | mm | 560  |
| Single fork width   | mm | 160  |
| Lowered fork height | mm | 85   |
| Max. Lifting height | mm | 200  |
| Overall length      | mm | 1624 |
| Overall width       | mm | 560  |



### SMITH Powered Pallet Truck Walkie – Li-ion battery – 1500kg, 1.5t, 200mm

Art. no. **770060**



Price & details

- Affordable Powered pallet truck SMITH Walky
- Suitable for indoor use , suitable for narrow spaces , environmentally friendly
- Fork size: 550\*1160mm – for EURO pallet
- Ergonomic – very stable
- Load capacity 1500 kg or 1.5t
- 12 months' warranty
- Lifting height: 200mm

#### TECHNICAL DATA

##### Model

##### SMITH Powered pallet truck...

|                                |          |        |
|--------------------------------|----------|--------|
| Drive type                     | ELECTRIC |        |
| Manner of operation            | Walkie   |        |
| Load Capacity                  | 1500     | kg     |
| Load Centre                    | 600      | c (mm) |
| Distance between fork backr... | 944      | x (mm) |
| Wheel Base                     | 1243     | y (mm) |
| Service Weight (with battery)  | 142      | kg     |
| Tire material                  | PU       |        |



### SMITH pallet jack scale SLL3C 1530 – load capacity 1500 kg, lift height 200 mm, Li on 24/30 – V/Ah

Art. no. **770062**



Price & details

- SMITH SLL3C 1530 industrial material handling solution with integrated weighing
- Load capacity 1500 kg for standard palletized goods
- Lift height 200 mm for efficient short-distance transport
- Integrated scale system for internal weight verification
- Electric drive motor ensures smooth controlled movement
- Hydraulic lifting system supports stable daily operation
- 24 V lithium-ion battery for reliable energy supply

#### TECHNICAL DATA

|                     |               |                |                                |
|---------------------|---------------|----------------|--------------------------------|
| Load Capacity       | 1500 kg       | Lift Height    | 200 mm                         |
| Lowered Fork Height | 85 mm         | Fork Length    | 1150 mm                        |
| Overall Fork Width  | 560 / 685 mm  | Drive Motor    | 24 V / 0.75 kW                 |
| Lifting Motor       | 24 V / 0.8 kW | Battery Type   | Li-ion 24 V / 30 Ah            |
| Turning Radius      | 1440 mm       | Service Weight | Approx. 155 kg without battery |
| Integrated Scale    | Yes           |                |                                |



### SMITH Electric Forklift | 3-Wheel Electric Lift Truck 1500kg, 450cm

Art. no. **770070**

- Affordable SMITH Electric Forklift | 3-Wheel Electric Lift Truck 1500kg, 450cm
- Suitable for indoor and outdoor use , suitable for narrow spaces , environmentally friendly
- 360° rotation on the spot
- Fork size: 35 x 100 x 950 mm – for EURO pallet (fork carriage width 618 mm)
- The lifting motor has the power of 24V/4.5 kW
- Powerful battery 24V/400 Ah and a charger
- Ergonomic – very stable



Price & details

#### TECHNICAL DATA

##### Model

##### SMITH Electric Forklift | 3...

|                                |         |    |
|--------------------------------|---------|----|
| Power                          | Battery |    |
| Load Capacity                  | 1500    | kg |
| Load center distance           | 500     | mm |
| Distance between fork backr... | 158     | mm |
| Wheel base                     | 1090    | mm |
| Weight with battery            | 2570    | kg |
| Tires                          | PU      |    |
| Wheel size, front              | 305×127 | mm |



### SMITH Electric forklift truck XE25A 2500 kg 300 cm

Art. no. **770080**

- Powerful and easy-to-operate electric forklift
- Optimized flow distribution in the steering system
- Adjustable steering wheel for higher comfort and agility
- Double front wheel brake system for higher safety and reliability
- Duplex telescopic mast and a powerful lifting system
- Rated capacity: 2500 kg
- Load center: 500 mm



Price & details

#### TECHNICAL DATA

##### Load capacity

**2500**

**kg**

|                               |                    |                    |
|-------------------------------|--------------------|--------------------|
| Load center C                 | 500                | mm                 |
| Max lifting height            | 3000               | mm                 |
| Free lifting height           | 145                | mm                 |
| Fork size L4 x W x T          | 1070 x 120 x 40    | mm                 |
| Mast tilt angle (F/R) α/β     | 6/8                | deg                |
| Overall dimension (L x W x... | 3320 x 1185 x 2148 | mm                 |
| Outer min. turning radius r   | 2020               | mm                 |
| Max speed (unloaded/loaded)   | Travel V2          | 13/12 (15/14) km/h |



## Enclosed Cab Electric Forklift 3.5 Ton XE4535A 4500 mm 3500 kg

Art. no. **770088**



Price & details

- Electric forklift truck XE4535A rated load capacity 3500 kg
- Triplex mast achieves maximum lift height 4500 mm
- Integrated side shifter
- 24 V / 420 Ah traction battery ensures consistent power delivery
- External charger 24 V / 50 A supports rapid overnight charging
- Closed cabin includes integrated heater ensuring operator comfort
- Fast Delivery – One Year Warranty

### TECHNICAL DATA

|                              |               |                                    |                               |
|------------------------------|---------------|------------------------------------|-------------------------------|
| Rated Capacity               | 3500 kg       | Load Center                        | 500 mm                        |
| Max Lifting Height           | 4500 mm       | Free Lift                          | on request                    |
| Mast Type                    | Triplex       | Side Shifter                       | Integrated                    |
| Battery                      | 24 V / 420 Ah | Charger                            | External European 24 V / 50 A |
| Travel Speed (Unladen/Laden) | on request    | Lift Speed (Unladen/Laden)         | on request                    |
| Max Gradeability             | on request    | Service Weight (Including Battery) | on request                    |
| Overall Dimensions (L×W×H)   | on request    | Cabin                              | Closed with Heater            |



## Walkie Stacker Forklift SMITH, Semi-electric, 1500kg 350cm 3500mm

Art. no. **770090**



Price & details

- Versatile and reliable semi-electric stacker for industrial settings
- Max Lifting Capacity: 1500kg
- Max Lifting Height: 3500mm
- Battery (12V/120AH)
- Battery level indicator
- Forksize: 550/640\*900/1100mm
- Equipped with safety features such as an emergency stop button and safety brake

### TECHNICAL DATA

#### Manufacturer

**SMITH**

|                             |          |      |
|-----------------------------|----------|------|
| Model                       | SXPNI535 |      |
| Power unit                  | Electric |      |
| Operation                   | Manual   |      |
| Load capacity               | Q (kg)   | 1500 |
| Load centre                 | c (mm)   | 450  |
| Axle centre to fork face    | x (mm)   | 700  |
| Wheel base                  | y (mm)   | 1195 |
| Service weight with battery | kg       | 415  |



## SMITH Self-lifting electric stacker 500kg 1500mm

Art. no. **770100**



Price & details

- SMITH Self-lifting electric stacker 500kg 1500mm
- Combines stacker and tail lift functionalities for efficient material handling
- Maximum load capacity of 500kg
- Lifting height of 1500mm suits delivery vehicles
- Overall Length: 1555mm
- Overall Width: 790mm
- Overall Height: 1817mm

### TECHNICAL DATA

#### Model

**SXCDS0515**

|                  |          |         |
|------------------|----------|---------|
| Capacity         | 500      | Q(Kg)   |
| Load center      | 400      | C(mm)   |
| Type of lifting  | Electric |         |
| Operating type   | Walkie   |         |
| Material         | Nylon/PU |         |
| Wheel base       | 850      | y(mm)   |
| Front wheel base | 380      | W1(mm)  |
| Back wheel base  | 672      | b10(mm) |



## Electric Hand Stacker SMITH Heavy-duty 2000kg, 2 tons, 4500mm, 4,5m

Art. no. **770110**



Price & details

- The SMITH Heavy-duty Electric Stacker has a load capacity of 2000kg
- Max lifting height: 4500mm
- Free lift: 1686mm
- Fork size: 570\*1150mm
- Curtis Controller
- Continuous working time 5-6 hours
- Equipped with a powerful AC motor and ZF Friedrichshafen transmission

### TECHNICAL DATA

#### Manufacturer

**SMITH**

|                             |            |        |
|-----------------------------|------------|--------|
| Model                       | CXL20GF    |        |
| Power unit                  | Electric   |        |
| Operation                   | Pedestrian |        |
| Load capacity               | 2000       | Q (kg) |
| Load capacity at max height | 2000       | Q (kg) |
| Load centre                 | 600        | c (mm) |
| Axle centre to fork face    | 672        | x (mm) |
| Wheel base                  | 1384       | y (mm) |



## SMITH lithium-ion pallet jack 2000kg XT2

Art. no. **770200**

- Electric drive and lifting with 2000kg load capacity
- Extended battery life , up to 3x runtime, short recharge time, environmentally friendlier, lightweight and compact for easy...
- Brushless drive motor (maintenance-free), battery level indicator , lithium battery, error code display , recharge alert , q...
- Smart functions & safety settings: fast/slow speed switching, engineer mode, upright drive mode, and battery protection
- 48V/10Ah lithium battery , 6%/20% gradeability, <70dB noise level
- Brushless DC 1.0 kW drive motor, DC 0.8 kW lift motor, regenerative braking
- Quick travel/lifting/lowering performance, electromagnetic brake



Price & details

### TECHNICAL DATA

#### Drive

#### Electric

|                          |                      |     |    |
|--------------------------|----------------------|-----|----|
| Operator type            | Pedestrian           |     |    |
| Load capacity/rated load | 2000                 | Q   | kg |
| Load center              | 600                  | C   | mm |
| Height, fork lowered     | 82±2                 | h13 | mm |
| Wheelbase                | 1197/1267            | y   | mm |
| Wheel                    | PU                   |     | mm |
| Wheel size, front        | 140*55               |     | mm |
| Wheel size, rear         | 80*93 (single wheel) |     | mm |



## Diesel forklift FX3 3500kg, 300cm

- FX3 Diesel Forklift : Powerful and efficient industrial material-handling solution
- Rated Capacity: 3500 kg for heavy lifting requirements
- Max Lifting Height: Up to 3000 mm for efficient stacking operations
- Powered by a diesel engine with a 40 kW at 2650 rpm , displacement 2.67 L
- Fork can tilt forwards to backward
- Max. travel speed: 20 km/h
- Compact Dimensions: Overall length 3900 mm, width 1240 mm, height 2130 mm



Price & details

### TECHNICAL DATA


|                                  |                                                                      |                                      |             |
|----------------------------------|----------------------------------------------------------------------|--------------------------------------|-------------|
| Power Type                       | <b>Diesel</b>                                                        | Rated Capacity (kg)                  | <b>3500</b> |
| Max. Lifting Height (mm)         | <b>3000</b>                                                          | Design Model                         | <b>FX3</b>  |
| Self Weight (kg)                 | <b>4530</b>                                                          | Tread – Tyre width (mm) – S Front    | <b>1000</b> |
| Tread – Tyre width (mm) – P Rear | <b>980</b>                                                           | L5 Wheel Base (mm)                   | <b>1650</b> |
| X Front Overhang (mm)            | <b>493</b>                                                           | L4 Rear Overhang (mm)                | <b>575</b>  |
| Overall Dimensions (mm)          | <b>L1 overall length: 3900, B overall width: 1240, H6 overall...</b> | Free Lifting Height (mm)             | <b>170</b>  |
| Load Center (mm)                 | <b>500</b>                                                           | Mast Tilt Angle (front/rear, degr... | <b>6/12</b> |



3kW Gasoline Generator NL3500

Art. no. 740000

- Reliable Gasoline Generator 3kW ROBOMASS NL3500 for various applications
- Portable design for easy transportation
- 3kW maximum power output
- Durable 1-cylinder, 4-stroke engine
- 15-liter fuel tank, 12.7 hours runtime
- Recoil start for quick operation
- Two 230V European sockets



Price & details

TECHNICAL DATA

|              |                             |                     |                                                   |
|--------------|-----------------------------|---------------------|---------------------------------------------------|
| Rated Power  | 2.8 kW                      | Max Power           | 3.0 kW                                            |
| Frequency    | 50 Hz                       | AC Voltage          | 230V                                              |
| Phase        | 1 phase                     | Starting System     | Recoil start                                      |
| DC Output    | 12V/8.3A                    | Socket              | 2x230V(16A) European sockets                      |
| Alternator   | 100% Copper, Brush with AVR | Engine Type         | 1-cylinder, 4-stroke, air-cooled, gasoline engine |
| Engine Model | 170F                        | Engine Displacement | 212cc                                             |
| Fuel Type    | Gasoline                    | Fuel Tank Volume    | 15L                                               |



## 5kW Gasoline Generator NL6500

Art. no. **740020**

- Reliable 5kW gasoline generator for residential and commercial applications
- Equipped with a powerful 1-cylinder, 4-stroke gasoline engine
- Electric start system ensures easy and quick operation
- Extended 25-liter fuel tank for long-lasting performance
- Delivers consistent power during outages or remote use
- 5.5kW max output for high-demand devices and equipment
- 50 Hz frequency and 230V AC voltage compatibility



Price & details

### TECHNICAL DATA

|              |                             |                     |                                                   |
|--------------|-----------------------------|---------------------|---------------------------------------------------|
| Rated Power  | 5.0 kW                      | Max Power           | 5.5 kW                                            |
| Frequency    | 50 Hz                       | AC Voltage          | 230 V                                             |
| Phase        | 1 phase                     | Starting System     | Electric start                                    |
| DC Output    | 12V / 8.3A                  | Socket              | 2x230V(16A), 1x230V(32A) European sockets         |
| Alternator   | 100% Copper, Brush with AVR | Engine Type         | 1-cylinder, 4-stroke, air-cooled, gasoline engine |
| Engine Model | 188F                        | Engine Displacement | 420 cc                                            |
| Fuel Type    | Gasoline                    | Fuel Tank Volume    | 25 L                                              |



## Inverter generator 3500 watt 4500iE

Art. no. **740100**

- inverter generator 3500 watt high-quality
- 3.5 kW rated power , 4 kW peak output for reliable performance
- Advanced inverter technology ensures clean, stable power for electronics
- Electric start with remote control for effortless operation
- Quiet operation at 64 dB(A) for residential and outdoor use
- 12-liter fuel tank provides up to 8 hours of runtime
- Compact and lightweight design for easy portability



Price & details

### TECHNICAL DATA

|                   |              |                              |                                    |
|-------------------|--------------|------------------------------|------------------------------------|
| Rated Power       | 3.5 kW       | Max Power                    | 4 kW                               |
| Frequency         | 50 Hz        | AC Voltage                   | 230 V                              |
| Phase             | 1 Phase      | Starting System              | Electric start with remote control |
| DC Output         | 12 V / 8.3 A | Socket                       | 2 x 230 V (16 A) European sockets  |
| Dual USB Outputs  | Yes          | 3-in-1 Digital Display Meter | Yes                                |
| Noise ( dB) at 7m | 64 dB        | Displacement                 | 223 cc                             |
| Fuel Type         | Gasoline     | Fuel Tank Volume             | 12 L                               |



### Silent Inverter Generator 9kW

Art. no. **740150**

- Silent Inverter Generator 9kW 9 kW rated power for operations
- Silent Inverter Generator 9kW 9.5 kW maximum power
- Silent inverter technology supports quieter workplace operation
- Electric start enables simple generator activation
- Remote control supports easier equipment management
- 230V 50Hz output for professional compatibility
- Digital display improves operating visibility



Price & details

#### TECHNICAL DATA

|                    |                           |                 |                 |
|--------------------|---------------------------|-----------------|-----------------|
| Generator Type     | Silent Inverter Generator | Rated Power     | 9 kW            |
| Maximum Power      | 9.5 kW                    | Voltage         | 230V            |
| Frequency          | 50Hz                      | Starting Method | Electric Start  |
| Remote Control     | Yes                       | Display         | Digital Display |
| USB Connection     | Yes                       | Weight          | 105 kg          |
| Packing Dimensions | 925 × 690 × 780 mm        |                 |                 |



### 5kW Diesel Generator 6500SE

Art. no. **740210**

- High-quality diesel generator 5kW
- Delivers 5kW rated and 5.5kW peak power output
- Equipped with 188F single-cylinder, 4-stroke diesel engine
- Direct injection system for optimized fuel efficiency and performance
- AVR technology provides stable voltage for sensitive electronics
- Brushed synchronous alternator ensures durable and consistent power output
- 16L fuel tank allows extended operation without refueling



Price & details

#### TECHNICAL DATA

|                    |                                   |                    |                                                         |
|--------------------|-----------------------------------|--------------------|---------------------------------------------------------|
| Rated Power        | 5 kW                              | Maximum Power      | 5.5 kW                                                  |
| Engine Model       | 188F                              | Engine Type        | Single-cylinder, 4-stroke, air-cooled, direct injection |
| Displacement       | 456 cc                            | Fuel Type          | Diesel                                                  |
| Fuel Tank Capacity | 16 liters                         | Fuel Consumption   | 270 g/kWh                                               |
| Oil Capacity       | 1.65 liters                       | Starting System    | Electric start                                          |
| Alternator Type    | Brushed, self-excited synchronous | Voltage Regulation | AVR (Automatic Voltage Regulator)                       |
| Rated Voltage      | 230V/400V                         | Frequency          | 50 Hz                                                   |



Diesel Generator 7kW 9500SE

Art. no. 740230



Price & details

- High-quality 7kW Silent Diesel Generator 9500SE+
- 4-stroke, direct injection engine for optimized fuel efficiency
- AVR regulation ensures stable voltage output
- Brushed synchronous alternator for reduced maintenance and extended lifespan
- Low 70 dB(A) noise level for quiet operation
- 16L high-capacity fuel tank for longer runtime
- Durable sound-dampening enclosure minimizes noise and vibration

TECHNICAL DATA

|                        |                                                       |                     |                                                |
|------------------------|-------------------------------------------------------|---------------------|------------------------------------------------|
| Rated Output           | 7 kW                                                  | Max Output          | 7.5 kW                                         |
| Frequency              | 50 Hz                                                 | AC Voltage          | 230 V                                          |
| Phase                  | 3 phase                                               | Starting System     | Electric start                                 |
| DC Output              | 12V/8.3A                                              | Power Factor        | 1                                              |
| Noise Level (dB at 7m) | 70 dB                                                 | Socket              | 2x230V(16A), 1x400V(32A) European sockets      |
| Alternator Type        | Self-excited, Brushed Synchronous Alternator with AVR | Engine Type         | 1-cylinder, 4-stroke, air-cooled diesel engine |
| Engine Model           | 195FC                                                 | Engine Displacement | 531 cc                                         |



8kW Diesel Generator 11000SE

Art. no. 740250



Price & details

- High-quality Silent diesel generator 8kW
- 8 kW rated power output and a maximum power of 8.5 kW for reliable performance across applications
- Silent operation with low noise level at 72 dB(A)
- Efficient 4-stroke direct injection diesel engine
- A VR voltage stabilization for consistent power supply
- Heavy-duty, brushed synchronous alternator for durable performance
- 30-liter fuel tank ensures extended 10-hour runtime

TECHNICAL DATA

|                    |                                   |                    |                                                         |
|--------------------|-----------------------------------|--------------------|---------------------------------------------------------|
| Rated Power        | 8 kW                              | Maximum Power      | 8.5 kW                                                  |
| Engine Model       | 1100F                             | Engine Type        | Single-cylinder, 4-stroke, air-cooled, direct injection |
| Displacement       | 660 cc                            | Fuel Type          | Diesel                                                  |
| Fuel Tank Capacity | 30 liters                         | Fuel Consumption   | ≤270 g/kWh                                              |
| Oil Capacity       | 2,5 liters                        | Starting System    | Electric start                                          |
| Alternator Type    | Brushed, self-excited synchronous | Voltage Regulation | AVR (Automatic Voltage Regulator)                       |
| Rated Voltage      | 230V/400V                         | Frequency          | 50 Hz                                                   |



## Diesel Generator 10kW SDG10

Art. no. **740270**

- High-quality 10kW diesel generator for industrial and commercial use
- Reliable 1-cylinder, 4-stroke, air-cooled diesel engine
- Efficient direct injection system for optimized fuel combustion
- Low fuel consumption rate of  $\leq 270$  g/kWh
- Large 30-liter fuel tank for extended operation
- Quiet operation at 72 dB(A) at 7 meters
- Self-excited, brushed synchronous alternator with AVR regulation



Price & details

### TECHNICAL DATA

|                 |                                                       |                 |                                           |
|-----------------|-------------------------------------------------------|-----------------|-------------------------------------------|
| Rated Power     | 9.5 kW                                                | Maximum Power   | 10 kW                                     |
| Frequency       | 50 Hz                                                 | AC Voltage      | 230V                                      |
| Phase           | 3 phase                                               | Starting System | Electric start                            |
| DC Output       | 12V/8.3A                                              | Power Factor    | 1                                         |
| Noise Level     | 72 dB(A) at 7m                                        | Socket          | 2x230V(16A), 1x400V(32A) European sockets |
| Alternator Type | Self-excited, Brushed Synchronous Alternator with AVR | Engine Model    | 1103F                                     |
| Engine Type     | 1-cylinder, 4-stroke, air-cooled diesel engine        | Displacement    | 734 cc                                    |



## Diesel Generator 20kW SDG20 – BAUDOUIN engine – Water Cooled – Silent

Art. no. **740280**

- Silent diesel generator 20kW SDG20 20kW standby power
- 18kW prime power suitable for continuous operation
- BAUDOUIN 4M06G25/5 engine for stable performance
- 230V and 400V supports single and three phase loads
- Water cooled system for stable operating temperature
- SmartGen 6120 controller with remote monitoring support
- Integrated ATS for automatic emergency power switching



Price & details

### TECHNICAL DATA

|                 |                                       |                    |                                                                |
|-----------------|---------------------------------------|--------------------|----------------------------------------------------------------|
| Type            | Silent diesel generator, water-cooled | Prime power        | 18 kW / 23 kVA                                                 |
| Standby power   | 20 kW / 25 kVA                        | Voltage            | 230 V and 400 V                                                |
| Frequency       | 50 Hz                                 | Engine brand       | BAUDOUIN                                                       |
| Engine model    | 4M06G25/5                             | Engine prime power | 23 kW / 29 kVA                                                 |
| Cooling         | water                                 | Controller         | SmartGen 6120, remote monitoring                               |
| Transfer switch | ATS, integrated                       | Cold start         | oil, water and air heaters, temperature regulator, electric... |
| Sockets         | 1 x 230 V, 1 x 400 V, European        | Weight             | 750 kg                                                         |



## Diesel Generator 32kW SDG32 – BAUDOUIN engine – Water Cooled – Silent

Art. no. **740282**



Price & details



- Silent Diesel Generator 32 kW 40 kVA industrial power solution
- Prime power 32 kW 40 kVA continuous operation capability
- Standby power 35 kW 44 kVA emergency backup reliability
- Baudouin diesel engine low fuel consumption high durability
- 230 400V output 50Hz compatible with European systems
- Water cooled system stable operation under heavy load
- Turbocharged engine improved torque and combustion efficiency

### TECHNICAL DATA

|                  |                                    |                             |                            |
|------------------|------------------------------------|-----------------------------|----------------------------|
| Prime Power      | 32 kW / 40 kVA                     | Standby Power               | 35 kW / 44 kVA             |
| Voltage          | 230/400V                           | Frequency                   | 50 Hz                      |
| Engine Brand     | Baudouin                           | Engine Type                 | 4-cylinder inline diesel   |
| Cooling System   | Water-cooled (liquid + antifreeze) | Injection System            | Direct injection           |
| Aspiration       | Turbocharged                       | Fuel Consumption (100% PRP) | Approx. 9.5 L/h            |
| Cooling Capacity | Up to 50°C ambient operation       | Controller                  | SmartGen 4G                |
| ATS              | Integrated                         | Starting System             | Electric start with heater |

## Diesel Generator 52 kW SDG50 – BAUDOUIN engine – Water Cooled – Silent

Art. no. **740285**



Price & details



- Diesel Generator 52 kW 52 kW prime power for operations
- Diesel Generator 52 kW 57 kW standby power
- BAUDOUIN 4M10G70/5 engine for professional performance
- Water cooled system supports stable operating conditions
- 230V 400V output for industrial compatibility
- 50Hz frequency for professional power applications
- SmartGen digital display supports operational monitoring

### TECHNICAL DATA

|                |                       |                |                          |
|----------------|-----------------------|----------------|--------------------------|
| Engine Brand   | BAUDOUIN              | Engine Model   | 4M10G70/5                |
| Cooling System | Water Cooled          | Prime Power    | 52 kW / 65 kVA           |
| Standby Power  | 57 kW / 72 kVA        | Voltage        | 230V / 400V              |
| Frequency      | 50Hz                  | Controller     | SmartGen Digital Display |
| ATS            | Included / Supported  | Heater System  | Included                 |
| Electric Pump  | Included              | Generator Type | Silent Diesel Generator  |
| Dimensions     | 2600 × 1050 × 1400 mm | Weight         | 1160 kg                  |



## Diesel Generator 108 kW SDG108 – BAUDOUIN engine – Water Cooled – Silent

Art. no. **740290**



Price & details

- Diesel Generator 108 kW 108 kW prime power for operations
- Diesel Generator 108 kW 119 kW / 149 kVA standby power
- BAUDOUIN 6M11G150/5 engine for industrial performance
- Water cooled system supports stable operation
- 230V 400V output for professional compatibility
- 50Hz frequency for industrial power requirements
- SmartGen display supports operational monitoring

### TECHNICAL DATA

|                |                      |                              |                  |
|----------------|----------------------|------------------------------|------------------|
| Engine Brand   | BAUDOUIN             | Engine Model                 | 6M11G150/5       |
| Cooling System | Water Cooled         | Prime Power                  | 108 kW / 135 kVA |
| Standby Power  | 119 kW / 149 kVA     | Engine Prime Power           | 128 kW / 160 kVA |
| Voltage        | 230V / 400V          | Frequency                    | 50Hz             |
| Display        | SmartGen Display     | ATS                          | Integrated ATS   |
| Heater System  | Oil Water Air Heater | Heater Temperature Regulator | Included         |
| Electric Pump  | Included             | Weight                       | 1780 kg          |



## Floor scrubber J25 – 1600 m<sup>2</sup>/h efficiency

Art. no. **750020**



Price & details

- Floor Scrubber J25 cleans multiple flooring types including epoxy, ceramic, concrete, painted surfaces, marble, terrazzo, vi...
- It offers a cleaning efficiency of 1600 m<sup>2</sup>/h for optimal performance
- The power output is 880W for robust operation on a DC 24V system
- The brush operates at a speed of 180 RPM ensuring thorough cleaning
- The clean water tank holds 25 liters , and the recovery tank holds 30 liters
- The battery provides 2-3 hours of runtime with a recharge time of 6-8 hours
- Its dimensions are 910mm x 510mm x 800mm , making it compact and portable

### TECHNICAL DATA

|                              |                        |                           |                       |
|------------------------------|------------------------|---------------------------|-----------------------|
| Total Power Output           | 880W                   | Voltage                   | DC 24V                |
| Brush Motor Power            | 380W                   | Suction Motor Power       | 500W                  |
| Cleaning Efficiency          | 1600 m <sup>2</sup> /h | Clean Water Tank Capacity | 25 liters             |
| Recovery Water Tank Capacity | 30 liters              | Battery Runtime           | 2-3 hours             |
| Charging Time                | 6-8 hours              | Dimensions (L x W x H)    | 910mm x 510mm x 800mm |
| Weight (without batteries)   | 50kg                   | Brush Speed               | 180 RPM               |



## Commercial floor scrubber J45 – 2100 m<sup>2</sup>/h efficiency

Art. no. **750040**



Price & details

- High-quality Commercial Floor Scrubber J45
- Cleaning Efficiency 2100 m<sup>2</sup>/h suitable for medium to large spaces
- 510 mm Cleaning Width and 800 mm Drying width ensures wide area coverage per pass
- Brush Speed 180 RPM delivers powerful and thorough floor scrubbing
- 45L Solution Tank and 55L Recovery Tank reduce refill interruptions
- Cordless design provides mobility and eliminates workplace trip hazards
- Ergonomic handle simplifies operation for extended cleaning sessions

### TECHNICAL DATA

|                                  |                  |                            |                          |
|----------------------------------|------------------|----------------------------|--------------------------|
| Electric floor scrubber          | Parameter Values | Cleaning Width             | 510 mm                   |
| Drying Width                     | 800 mm           | Cleaning Efficiency        | 2100 m <sup>2</sup> /h   |
| Number of Brush Discs            | 1                | Volume of Clean Water Tank | 45L                      |
| Volume of Waste Water Tank       | 55L              | Battery                    | 2 pieces: 12V100AH/piece |
| RPM of Brush Disc (No-load/Load) | 180 r/min        | Product Size               | 1245 x 800 x 985 mm      |
| Battery Quantity                 | 2                | Noise Level                | ≤ 65dB(A)                |



## Industrial floor scrubber J85 – 3550 m<sup>2</sup>/h efficiency

Art. no. **750060**



Price & details

- Cleaning efficiency reaches 3550m<sup>2</sup>/h for quick and effective cleaning
- Solution tank holds 85L for extended cleaning sessions without refilling
- Recovery tank capacity of 90L ensures uninterrupted wastewater collection
- Brush motor powered by 550W for heavy-duty cleaning performance
- Vacuum motor rated at 600W for efficient debris and water recovery
- Working width of 510mm covers more surface area per pass
- Squeegee width measures 860mm for optimal water recovery

### TECHNICAL DATA

|                          |                       |                           |                         |
|--------------------------|-----------------------|---------------------------|-------------------------|
| Industrial floor cleaner | J85                   | Capacity of solution tank | 85L                     |
| Working width            | 510mm                 | Capacity of recovery tank | 90L                     |
| Squeegee width           | 860mm                 | Storage battery           | 6EVF-100AH*2            |
| Working efficiency       | 3550m <sup>2</sup> /h | Machine weight            | 190kg                   |
| Brush motor              | 550W                  | Continuous working time   | 3-3.5h                  |
| Vacuum motor             | 600W                  | Product size              | 1450mm x 900mm x 1250mm |



## Ride on floor scrubber SMITH J115 – 5600 m<sup>2</sup>/h efficiency

Art. no. **750080**



Price & details

- SMITH Ride-On Floor Scrubber J115 designed for high-performance cleaning in industrial and commercial spaces
- Wide cleaning width of 800 mm for efficient coverage of large areas
- Squeegee width of 1080 mm ensures thorough water recovery for a spotless finish
- Exceptional work efficiency of 5600 m<sup>2</sup>/h for faster cleaning operations
- Large 115-liter solution tank minimizes refilling interruptions during cleaning sessions
- 120-liter recovery tank for efficient wastewater collection and disposal
- Extended battery runtime of 3.5–4.5 hours for uninterrupted cleaning in demanding environments

### TECHNICAL DATA

|                           |                            |                        |                                                   |
|---------------------------|----------------------------|------------------------|---------------------------------------------------|
| Cleaning Width            | 800 mm                     | Squeegee Width         | 1080 mm                                           |
| Work Efficiency           | 5600 m <sup>2</sup> /h     | Solution Tank Capacity | 115 L                                             |
| Recovery Tank Capacity    | 120 L                      | Brush Motor Power      | 380 W × 2                                         |
| Suction Motor Power       | 550 W                      | Noise Level            | ≤ 68 dB(A)                                        |
| Battery Type              | Lead-Acid Maintenance-Free | Battery Runtime        | 3.5–4.5 hours                                     |
| Dimensions (L × W × H)    | 1550 × 1080 × 1300 mm      | Machine Weight         | 320 kg                                            |
| Maximum Climbing Gradient | 15%                        | Water Filling Ports    | Large (quick fill) and Small (long-distance fill) |



## Ride-on sweeper SMITH JB1350 – 8000 m<sup>2</sup>/h efficiency

Art. no. **750100**



Price & details

- High-quality Ride-on sweeper SMITH JB1350
- Cleans up to 8000m<sup>2</sup>/h, perfect for large areas
- Wide 1350mm sweeping path with dual 260mm side brushes
- Durable 590mm rolling brush for effective debris collection
- Powered by a 48V battery with over 6 hours of runtime
- Strong 800W driving motor for smooth and reliable operation
- Large 120L dustbin for fewer emptying stops

### TECHNICAL DATA

|                             |                       |                            |                      |
|-----------------------------|-----------------------|----------------------------|----------------------|
| Maximum Cleaning Efficiency | 8000m <sup>2</sup> /h | Sweeping Width             | 1350mm               |
| Main brush length           | 590mm                 | Side Brush Diameter        | 260mm × 2            |
| Voltage / Rated Power       | 48V / 2000W           | Driving Motor Power        | 800W                 |
| Rolling Brush Motor Power   | 700W                  | Side Brush Motor Power     | 2 × 90W              |
| Suction Motor Power         | 360W                  | Operation Duration         | > 4 hours            |
| Forward Speed               | 0-12 km/h             | Gradient Climbing Capacity | 30%                  |
| Dustbin Capacity            | 120L                  | Dimensions (L × W × H)     | 1600 × 1350 × 1300mm |



### SMITH AS-X6 scissor lift, maximum platform height 5.8 m, maximum working height 7.8 m, load capacity 230 kg

Art. no. **780010**



Price & details

- SMITH AS-X6 Scissor Lift reaches 7.8m working height
- Supports 230kg load capacity for two operators and tools
- Powered by 24V DC battery system with long runtime
- Compact body 1.84m length and 0.76m width
- Includes automatic pothole protection and emergency stop system
- Extension platform extends up to 0.9 meters
- Provides 18s lifting and 28s lowering speed cycle

#### TECHNICAL DATA

|                                 |                                            |                             |                             |
|---------------------------------|--------------------------------------------|-----------------------------|-----------------------------|
| Max. Working Height             | <b>7.8 m</b>                               | Max. Platform Height        | <b>5.8 m</b>                |
| Platform Size (L×W)             | <b>1.65 × 0.76 m</b>                       | Extension Platform Length   | <b>0.9 m</b>                |
| Rated Capacity                  | <b>230 kg</b>                              | Extension Platform Capacity | <b>120 kg</b>               |
| Drive Speed (Stowed / Elevated) | <b>0–4 km/h / 0–0.8 km/h</b>               | Turning Radius (Outside)    | <b>1.55 m</b>               |
| Gradeability                    | <b>25%</b>                                 | Battery Voltage / Capacity  | <b>24V (6×4V/200Ah)</b>     |
| Motor Power                     | <b>3.3 kW</b>                              | Overall Weight              | <b>1480 kg</b>              |
| Ground Clearance                | <b>60 mm (retracted) / 15 mm (lifting)</b> | Control Type                | <b>Proportional Control</b> |



### SMITH AS-X1012 electric scissor lift, working height 12 m, platform 10 m, 320 kg

Art. no. **780020**



Price & details

- Electric scissor lift , self-propelled
- Working height 12 m , platform height 10 m
- Rated capacity 320 kg , extension deck 120 kg
- Platform 2.25 × 1.15 m , extension 1.0 m
- Two people indoors, one outdoors
- 1.84 m high with the rails folded, 1.15 m wide
- Batteries 4 × 6 V 200 Ah, drive 3.2 km/h

#### TECHNICAL DATA

|                         |                                             |                        |                                           |
|-------------------------|---------------------------------------------|------------------------|-------------------------------------------|
| Type                    | <b>Self-propelled electric scissor lift</b> | Maximum working height | <b>12 m</b>                               |
| Maximum platform height | <b>10 m</b>                                 | Rated capacity         | <b>320 kg</b>                             |
| Extension deck capacity | <b>120 kg</b>                               | Occupants              | <b>2 indoors, 1 outdoors</b>              |
| Platform size           | <b>2.25 × 1.15 m, extension 1.0 m</b>       | Machine size (L × W)   | <b>2.40 × 1.15 m</b>                      |
| Height, rails folded    | <b>1.84 m</b>                               | Height, guardrail up   | <b>2.46 m</b>                             |
| Ground clearance        | <b>95 mm stowed, 20 mm raised</b>           | Drive speed            | <b>3.2 km/h stowed, 0.8 km/h raised</b>   |
| Maximum slope, stowed   | <b>25 % (14°)</b>                           | Maximum work slope     | <b>3° forward and back, 1.5° sideways</b> |



**Battery for battery strapping tool GT-ONE  
SP3 14,4V 4,0 Ah LI-IO**

Art. no. **110070\_01**



Price & details



## Floor Scrubber Squeegee Blades J25 – Absorbent Rubber Strips

Art. no. **750020\_01**



Price & details

- Absorbent Rubber Strips for J25 designed for industrial floor cleaning
- Compatible with Industrial Floor Cleaner J25 squeegee system
- Front rubber strip size 660 x 33 x 2 mm
- Rear rubber strip size 730 x 35 x 2.5 mm
- Manufactured from durable absorbent rubber compound
- Ensures efficient water recovery and fast floor drying
- Supports uniform floor contact across full working width

### TECHNICAL DATA

|                         |                                        |                           |                                   |
|-------------------------|----------------------------------------|---------------------------|-----------------------------------|
| Product Type            | Absorbent Rubber Squeegee Strips       | Compatible Machine        | Industrial Floor Cleaner J25      |
| Front Rubber Strip Size | 660 × 33 × 2 mm                        | Rear Rubber Strip Size    | 730 × 35 × 2.5 mm                 |
| Material                | Industrial Absorbent Rubber Compound   | Function                  | Water Recovery and Surface Drying |
| Installation Method     | Mechanical Clamp Mounting              | Application Surface Types | Concrete, Tile, Epoxy, Vinyl      |
| Operating Environment   | Industrial and Commercial Indoor Areas |                           |                                   |



## Floor Machine Brushes J25

Art. no. **750020\_02**



Price & details

- Brushes for Industrial Floor Cleaner J25 are core working components designed to deliver controlled mechanical scrubbing per...
- These brushes provide direct surface agitation, enabling the removal of dirt, residues, and contaminants while supporting un...
- In professional cleaning environments where consistency , surface protection , and operational efficiency are required, corr...

### TECHNICAL DATA

|                       |                                        |                           |                              |
|-----------------------|----------------------------------------|---------------------------|------------------------------|
| Product Type          | Rotary Floor Cleaning Brushes          | Compatible Machine        | Industrial Floor Cleaner J25 |
| Brush Diameter        | 15 Inches                              | Function                  | Mechanical Surface Scrubbing |
| Mounting System       | J25 Standard Brush Drive               | Application Surface Types | Concrete, Epoxy, Tile, Vinyl |
| Operating Environment | Industrial And Commercial Indoor Areas |                           |                              |



## Floor scrubber squeegee blades SMITH J45 – Absorbent rubber strips

Art. no. **750040\_01**

- Absorbent Rubber Strips for J45 industrial floor scrubbers
- Compatible with J45 floor cleaner squeegee system
- Front rubber strip size 850 x 47 x 3.2 mm
- Rear rubber strip size 900 x 50 x 4.2 mm
- Manufactured from durable absorbent rubber compound
- Ensures efficient water recovery after cleaning
- Supports fast and uniform floor drying



Price & details

### TECHNICAL DATA

|                        |                    |                         |                        |
|------------------------|--------------------|-------------------------|------------------------|
| For machine            | J45 floor scrubber | Front strip (L × W × T) | 850 × 47 × 3.2 mm      |
| Rear strip (L × W × T) | 900 × 50 × 4.2 mm  | Squeegee width          | 800 mm                 |
| Suction motor          | 500 W              | Mounting                | steel plate and buckle |
| Box (L × W × H)        | 15 × 15 × 15 cm    |                         |                        |



## Floor Machine Brushes J45

Art. no. **750040\_02**

- Industrial Floor Cleaner J45 Brushes for mechanized floor cleaning
- Compatible with J45 industrial floor scrubber
- Brush diameter 20 inches for wide surface coverage
- Ensures uniform scrubbing pressure across cleaning width
- Supports effective dirt and residue removal
- Stable rotation for consistent cleaning performance
- Optimized for concrete epoxy tile vinyl floors



Price & details

### TECHNICAL DATA

|                      |                                               |                       |                              |
|----------------------|-----------------------------------------------|-----------------------|------------------------------|
| For machine          | J45                                           | Diameter              | 20 inch, about 508 mm        |
| Quantity per machine | 1                                             | Drive speed           | 180 rpm                      |
| Brush motor          | 550 W                                         | Machine working width | 510 mm                       |
| Fitting              | pushed onto the brush disc coupling, no tools | Floors                | concrete, epoxy, tile, vinyl |
| Box (L × W × H)      | 15 × 15 × 15 cm                               |                       |                              |



## Floor Scrubber Squeegee Blades J85 – Absorbent Rubber Strips

Art. no. **750060\_01**

- Absorbent Rubber Strips J85 designed for industrial floor scrubber systems
- Front rubber strip size 850 × 47 × 3.2 mm
- Rear rubber strip size 900 × 50 × 4.2 mm
- Compatible with Industrial Floor Cleaner J85 squeegee assembly
- Industrial-grade rubber for effective water recovery
- Supports consistent drying performance after cleaning cycles
- Resistant to detergents and common industrial cleaning chemicals



Price & details

### TECHNICAL DATA

|                         |                             |                        |                                  |
|-------------------------|-----------------------------|------------------------|----------------------------------|
| Product Type            | Absorbent Rubber Strips     | Compatible Machine     | Industrial Floor Cleaner J85     |
| Front Rubber Strip Size | 850 × 47 × 3.2 mm           | Rear Rubber Strip Size | 900 × 50 × 4.2 mm                |
| Material                | Industrial Absorbent Rubber | Installation Position  | Front and Rear Squeegee Assembly |
| Application             | Water Collection and Drying | Operating Environment  | Industrial and Commercial Floors |



## Floor Machine Brushes J85

Art. no. **750060\_02**

- Industrial Floor Cleaner J85 Brushes designed for professional scrubbing performance
- Brush diameter 19 inches for full working width coverage
- Compatible with Industrial Floor Cleaner J85 scrubbing deck
- Ensures uniform floor contact and consistent scrubbing results
- Supports efficient dirt and residue removal on hard floors
- Stable rotation reduces vibration during cleaning operation
- Designed for industrial and commercial cleaning environments



Price & details

### TECHNICAL DATA

|                       |                     |                       |                                  |
|-----------------------|---------------------|-----------------------|----------------------------------|
| Product Type          | Scrubbing Brushes   | Compatible Machine    | Industrial Floor Cleaner J85     |
| Brush Diameter        | 19 inches           | Application           | Mechanical Floor Scrubbing       |
| Installation Position | Main Scrubbing Deck | Operating Environment | Industrial and Commercial Floors |



## Floor Scrubber Squeegee Blades J115

Art. no. **750080\_01**

- Industrial Floor Cleaner J115 Absorbent Rubber Strips precise squeegee consumable
- Front rubber strip size 1055 x 57 x 4 mm
- Rear rubber strip size 1126 x 60 x 4.76 mm
- Designed for J115 ride on floor scrubber
- Ensures efficient water recovery in single cleaning pass
- Reduces streaking puddling and residual moisture
- Industrial grade rubber resistant to chemicals and abrasion



Price & details

### TECHNICAL DATA

|                        |                                   |                         |                                                         |
|------------------------|-----------------------------------|-------------------------|---------------------------------------------------------|
| For machine            | J115 floor scrubber               | Front strip (L x W x T) | 1055 x 57 x 4 mm                                        |
| Rear strip (L x W x T) | 1126 x 60 x 4.76 mm               | Squeegee width          | 1080 mm                                                 |
| Vacuum motor           | 550 W                             | Material                | industrial rubber, resistant to detergents and abrasion |
| Fitting                | clamped on the squeegee, no tools | Usable edges            | four per strip                                          |
| Box (L x W x H)        | 15 x 15 x 15 cm                   |                         |                                                         |



## Industrial Floor Cleaner J115 – Brushes

Art. no. **750080\_02**

- Industrial Floor Cleaner J115 Brushes dual scrubbing consumables
- Set includes two 15 inch brushes
- Designed for J115 ride on scrubber
- Ensures uniform pressure distribution across deck
- Supports effective dirt removal in single pass
- Maintains stable rotational speed during operation
- Reduces vibration and mechanical stress



Price & details

### TECHNICAL DATA

|                  |                            |                       |                                  |
|------------------|----------------------------|-----------------------|----------------------------------|
| Product Type     | Scrubbing Brushes          | Compatible Machine    | Industrial Floor Cleaner J115    |
| Brush Diameter   | 15 inches                  | Quantity              | 2 Brushes per Set                |
| Application      | Mechanical Floor Scrubbing | Installation Position | Underbody Brush Deck             |
| Replacement Type | Consumable Wear Part       | Operating Environment | Industrial and Commercial Floors |



## SMITH Electric Stacker CLJB – Battery (12/100 V/Ah)

Art. no. 770010\_01



Price & details

- SMITH Electric Stacker CLJB Battery 12V 100Ah deep cycle power
- Sealed industrial Battery for electric pallet stacker applications
- Nominal voltage 12V with rated capacity 100Ah
- Deep cycle design for repeated charge discharge operations
- Stable energy output for daily warehouse duty cycles
- ABS housing resistant to vibration and mechanical stress
- Operating temperature suitable for industrial environments

### TECHNICAL DATA

|                       |                            |                      |                         |
|-----------------------|----------------------------|----------------------|-------------------------|
| Nominal Voltage       | 12 V                       | Rated Capacity       | 100 Ah (20hr Rate)      |
| Battery Type          | Sealed Deep Cycle          | Discharge Voltage    | 1.80 V/cell (20hr Rate) |
| Operating Temperature | Discharge -15°C to 50°C    | Charging Temperature | 0°C to 40°C             |
| Battery Dimensions    | 260 × 168 × 210 mm         | Weight               | 26.0 kg                 |
| Terminal Type         | I3                         | Container Material   | ABS UL94-HB             |
| Cycle Life            | 400–600 Cycles at 100% DOD |                      |                         |



## SMITH Battery for Electric Stacker CLE – with S-Ride platform – (12V/120AH)

Art. no. 770030\_01



Price & details

- SMITH Electric Stacker CLE Battery 12V 120Ah traction configuration
- Lead acid traction Battery for ride on stacker use
- Stable voltage output during continuous industrial operation
- Sealed Battery design without electrolyte refilling requirement
- Compatible with standard 12V traction Battery chargers
- Supports full warehouse shift operation per charge
- High discharge current for lifting operations

### TECHNICAL DATA

|                           |                            |                        |            |
|---------------------------|----------------------------|------------------------|------------|
| Battery Type              | Lead-Acid Traction Battery | Nominal Voltage        | 12 V       |
| Nominal Capacity          | 120 Ah (C3)                | Battery Model          | 6-EVF-120B |
| Dimensions (L × W × H)    | 338 × 172 × 280 mm         | Total Height           | 281 mm     |
| Weight                    | 41.5 kg                    | Case Material          | ABS        |
| Maximum Discharge Current | 660 A                      | Maximum Charge Current | 120 A      |
| Terminal Type             | M8 Bolt Terminal           |                        |            |



## SMITH battery 48 V / 10 Ah for the XT2 electric pallet truck

Art. no. **770200\_01**

- SMITH battery 48 V / 10 Ah for the XT2 electric pallet truck is designed as a compact electric material handling solution fo...
- The unit is positioned for enterprises that require predictable lifting performance, stable energy supply, and reduced opera...
- The pallet truck architecture focuses on functional reliability, standardized components, and compatibility with common ware...



Price & details

### TECHNICAL DATA

|                           |                         |                           |                                     |
|---------------------------|-------------------------|---------------------------|-------------------------------------|
| Drive Type                | <b>Electric</b>         | Battery Type              | <b>Polymer Lithium Battery Pack</b> |
| Nominal Voltage           | <b>48 V</b>             | Nominal Capacity          | <b>10 Ah</b>                        |
| Charge Cut-off Voltage    | <b>54.6 V</b>           | Discharge Cut-off Voltage | <b>42.0 V</b>                       |
| Maximum Discharge Current | <b>10 A</b>             | Battery Weight            | <b>Approx. 5.0 kg</b>               |
| Operating Temperature     | <b>-10 °C to +50 °C</b> | Cycle Life                | <b>≥ 600 cycles</b>                 |



## SMITH 2A charger (EU) for the XT2 electric pallet truck

Art. no. **770200\_02**

- SMITH 2A charger (EU) for the XT2 electric pallet truck is designed as a dedicated charging solution for electric material h...
- The Charger is intended for professional industrial use, ensuring controlled energy replenishment, electrical safety, and lo...
- It is engineered to support 13-series lithium battery configurations commonly used in compact electric pallet trucks.



Price & details

### TECHNICAL DATA

|                        |                                        |                         |                                            |
|------------------------|----------------------------------------|-------------------------|--------------------------------------------|
| Input Voltage          | <b>100–240 Vac</b>                     | Operating Voltage Range | <b>90–264 Vac</b>                          |
| Input Frequency        | <b>50–60 Hz</b>                        | Rated Output Voltage    | <b>54.3 V</b>                              |
| Maximum Output Current | <b>2 A</b>                             | Charging Method         | <b>Constant Current / Constant Voltage</b> |
| Efficiency             | <b>&gt;85%</b>                         | Operating Temperature   | <b>-20 °C to +40 °C</b>                    |
| Protection Functions   | <b>OVP, OCP, SCP, Reverse Polarity</b> | Dimensions              | <b>159 × 73 × 38 mm</b>                    |
| Weight                 | <b>Approx. 0.43 kg</b>                 |                         |                                            |



## INDEX BY ARTICLE NUMBER

|           |                                                                |     |            |                                                              |    |
|-----------|----------------------------------------------------------------|-----|------------|--------------------------------------------------------------|----|
| 00003     | PET straps 12 x 0.6mm/406 – 2500m – strength 310kg – fl...     | 30  | 240010     | Shrink wrapping machine B4255                                | 65 |
| 110010    | NEO 9-16mm PET/PP battery strapping tool including batt...     | 5   | 240014     | Heat shrink machine F7060 – min product L:100mm, W: ...      | 66 |
| 110012    | Battery Powered Strapping Tool NEO2 9-16mm PET/PP in...        | 6   | 240020     | Shrink wrapper T5040                                         | 66 |
| 110020    | NEO Plus 16-19mm (5/8"-3/4") Battery Strapping Tool for P...   | 6   | 240023     | Automatic L bar sealer with shrink tunnel T4535 – Max. P...  | 67 |
| 110050    | TES Plus 16-19mm (5/8"-6/8") Battery Strapping Tool PET/P...   | 7   | 240050     | AUTOSHRINK automatic shrink wrapping machine, seal...        | 67 |
| 110055    | Battery-powered automatic strapping tool TES EXTREME ...       | 7   | 240055     | Automatic Side Sealer A450 – 15m/min – Highest packin...     | 68 |
| 110060    | Battery Operated Strapping Tool TES PRO 12-16mm (1/2"-5...     | 8   | 240060     | Thermal Heat Shrink Tunnel V4530 – 10m/min – Max pro...      | 68 |
| 110070    | Battery Powered PET Strapping Tool GT ONE 10-16mm (3/...       | 8   | 240065     | SHRINKCOMBO shrink wrapping machine – Automatic S...         | 69 |
| 110070_01 | Battery for battery strapping tool GT-ONE SP3 14,4V 4,0 ...    | 116 | 250010     | ECOBAND-S Paper & OPP banding machine 12mm                   | 48 |
| 110072    | Battery Strapping Tool SIAT VIPER 9-16mm (3/8"-5/8")           | 9   | 250021     | ECOBAND-B4620 Paper & OPP strapping machine 30m...           | 49 |
| 110080    | Battery Powered Strapping Tool PET GT SMART Plus 9-16...       | 9   | 250025     | ECOBAND-A banding machine on a stand for paper or O...       | 49 |
| 110090    | GT-XTREME 16-19mm Battery Strapping Tool for PET/PP s...       | 10  | 260013     | DOZE300T chamber vacuum sealer, 260 mm seal bar, 10 ...      | 70 |
| 110100    | Electric Strapping Tool Messersi MB620 12-16mm (1/2"-5/8...    | 10  | 260014     | DOZE400TB commercial vacuum sealer 400 mm – 20m³/h           | 71 |
| 110110    | MB820 Battery Hand Tool 16-19mm (5/8" to 3/4") Battery S...    | 11  | 260023     | DOZE400B industrial vacuum sealer 400 mm – 20m³/h            | 71 |
| 110120    | JET Battery Strapping Tool for 12-16mm (1/2"-5/8") PET/PP ...  | 11  | 260030     | DOZE600 double chamber vacuum sealer with double c...        | 72 |
| 110130    | Signode BXT3 9-19mm (3/8", 3/4") Battery Powered Strapp...     | 12  | 260100     | Foot Operated Heat Sealer ZONE300D 300mm                     | 72 |
| 110160    | ARGON 10-16mm (3/8"-5/8") Battery Strapping Tool for PE...     | 12  | 260120     | ZONE450F Impulse bag sealer – 450mm                          | 73 |
| 110170    | Strapping Tool Battery Powered ARGON PLUS 13-19mm f...         | 13  | 260122     | Foot pedal impulse sealer ZONE600F – 600mm                   | 73 |
| 111001    | Cordless strapping tool ITI 71 for 16-40mm textile/compos...   | 13  | 260200     | GT-100E Handheld thermal inkjet printer – One head           | 74 |
| 112001    | ELECTRA™ M SERIES battery powered Tensioner and Se...          | 14  | 260210     | ST-210S-H1 Inkjet thermal printer – One head                 | 74 |
| 112004    | AKU-STEEL DUO Battery-powered strapping tool and ten...        | 14  | 260211     | Dual Head Inkjet Printer ST-210S-H2                          | 75 |
| 120010    | Polyester strapping kit NEO 9-16mm PET/PP incl. Battery...     | 20  | 260300     | AS600F Vertical Band Sealer – 13mm Seal Width, 0-15m/...     | 75 |
| 120011    | Strapping tool kit NEO 9-16mm PET/PP incl. Battery & Ch...     | 21  | 260303     | FS150 Bag sealing machine up to 3kg – Vertical Type, 0-1...  | 76 |
| 120014    | PET Strapping Starter Kit NEO2 9-16mm PET/PP incl. Batt...     | 21  | 260305     | FI50PM Band Sealer with Inkjet Printer for bags up to 3k...  | 76 |
| 120017    | Cordless PP strapping kit NEO2 9-16mm incl. Battery & C...     | 22  | 260350     | Automatic Labeling Machine A175LB – 40-120pcs/min            | 77 |
| 120020    | Battery PET Strapping Kit GT-ONE 10-16mm (3/8"- 5/8") – ...    | 22  | 260354     | Tabletop auto labeling machine T160LB – 30-80pcs/min         | 77 |
| 120022    | PP Banding Kit   GT-ONE 10-16mm (3/8"- 5/8") – Battery &...    | 23  | 280050     | LINEBOX-03 Box packaging Line – 720 boxes/h                  | 78 |
| 120034    | Battery strapping set TES PRO 12-16mm incl. 2xBattery & ...    | 23  | 295001     | Flexible conveyor width 460mm, length 1200-4800mm, ...       | 79 |
| 120040    | Battery Strapping Set   TES Plus 16-19mm (5/8" to 6/8") – ...  | 24  | 295005     | Extend stainless-steel roller conveyor width 550mm, len...   | 79 |
| 120050    | Battery Operated PET Strapping Kit MB620 12-16mm – B...        | 24  | 295112     | Motor-drive Roller Conveyor RC2M-D                           | 80 |
| 120052    | Battery Strapping kit   MB620 12-16mm (1/2"- 5/8") – Batte...  | 25  | 295201     | Powered flex conveyor 4m and 6m – 15m/min                    | 80 |
| 120060    | Plastic Banding Kit ARGON 10-16mm PET/PP incl. Batter...       | 25  | 295301     | Truck unloader conveyor LOADER UL1790 – L790 + 1000c...      | 81 |
| 120061    | PP strapping kit with battery tool and cart ARGON 10-16...     | 26  | 330009     | Ramp for Pallet wrapping machine SMARTWRAP-X                 | 51 |
| 120120    | Pallet banding kit JET 12-16 mm PET/PP incl. Battery & C...    | 26  | 330054     | SMARTWRAP X2 Pallet Wrapping Machine   2000 kg, up ...       | 52 |
| 120121    | Plastic banding kit JET 12-16 mm PET/PP incl. Battery & C...   | 27  | 330054PS   | SMARTWRAP X2 PRE-STRETCH Pallet Wrapping Machin...           | 52 |
| 120400    | Pneumatic banding kit AIR19 13-19 mm PET/PP + PET str...       | 27  | 330054PSW  | Pallet Wrapping Machine SMARTWRAP X2 PRE-STRETC...           | 53 |
| 120450    | AIR DUO32 pneumatic steel strap tensioner and sealer           | 15  | 330054PSWP | Pre Stretch Pallet Wrapping Machine SMARTWRAP X2 ...         | 53 |
| 120500    | Poly banding kit PPST13 + PP strap 12mm – seals – strapp...    | 28  | 330054W    | SMARTWRAP X2 Pallet Wrapping Machine with Scale   2...       | 54 |
| 120510    | Strapping banding kit PPST16 + PP strap 15,5 mm – seals ...    | 28  | 330054WP   | SMARTWRAP X2 Stretch Wrapping Machine with Scale a...        | 54 |
| 120800    | Cord strapping kit – Manual strapping tool CORD 13-19 m...     | 29  | 330080     | Automatic Pallet Wrapping Machine SMARTWRAP X10 P...         | 55 |
| 123       | Pallet threading tool B190cm                                   | 16  | 330109     | Automatic Stretch Wrap Machine SMARTWRAP X20 200...          | 55 |
| 130010    | AIR19 Pneumatic Strapping Tool 13-19mm (1/2" to 3/4") Ba...    | 16  | 330300     | Automatic Pallet Stretch Wrapper EASY-IN                     | 56 |
| 130040    | AIR Metal 19-32mm (3/4" – 1 1/2") – Pneumatic steel strappi... | 17  | 330400     | Pallet Wrapper EASY-IN PRE-STRETCH                           | 56 |
| 140010    | Manual strapping tool PPST13/16 for PP strap 12/13mm a...      | 17  | 330500     | Rotating arm for pallet wrapping SMARTWRAP-RA1000 ...        | 57 |
| 140100    | BO-51 Manual sealless steel strapping tools 13-20mm            | 18  | 330520     | SMARTWRAP S3 In-line Fully Automatic Pallet Wrapping...      | 57 |
| 140110    | A3 sealless steel strapping tool 13-19mm                       | 18  | 330700     | Box Wrapping Machine P409                                    | 58 |
| 140112    | A4 sealless steel strapping tool 25-32mm – Buckle-free         | 19  | 330710     | Box wrapping machine SMARTWRAP B3 PRESTRETCH                 | 58 |
| 140200    | Manual strapping tool for textile & composite/corded stra...   | 19  | 330800     | ROBI-600B Robot Stretch Wrapper PRESTRETCH                   | 59 |
| 210012    | Automatic strapping machine – AUTOMA for PP strap 11-...       | 43  | 331000     | Stretch film dispenser HOLD3 – Stretching Rate: 35% – Fil... | 59 |
| 210030    | HIPO PRO XS Automatic strapping machine – PP strap 5...        | 44  | 440010     | Paper baler TONNA5, 5 tons, 50kN, bale 40kg                  | 87 |
| 210043    | HIPO PRO High speed Automatic Strapping Machine 5-1...         | 44  | 440020     | Recycling baler TONNA10, 10 tons, 100kN, bale 80kg           | 88 |
| 210048    | HIPO ULTRA – auto strapping machine – PP strap 5-6m...         | 45  | 440030     | Vertical baler TONNA20, 20 tons, 200kN, bale 150 kg          | 88 |
| 210048B   | Automatic strapping machine with conveyor belt – HIPO...       | 45  | 440040     | Vertical baler TONNA25, 25 tons, 250kN, bale 250 kg          | 89 |
| 210060    | HIPO Semi-automatic Strapping Machine 5-15mm (3/16" ...        | 46  | 440060     | Waste baler TONNA45, 45 tons, 450kN, bale 450 kg             | 89 |
| 210070    | HIPO BOX Semi-automatic Strapping Machine PP strap ...         | 46  | 440110     | Film and Paper baler machine HSM V-Press 60                  | 90 |
| 210080    | Automatic Horizontal Strapping Machine HAMMER for P...         | 47  | 440120     | Small cardboard baler HSM V-Press 503 eco 3T, 30kN, ba...    | 90 |
| 210090    | ARCUS automatic pallet strapping machine for PET/PP t...       | 47  | 440130     | Cardboard box baler HSM V-Press 504 4T, 40 kN, bale wei...   | 91 |
| 220010    | COMBO Pallet Semi-automatic Strapping Machine PET/...          | 48  | 440141     | Cardboard bale recycling HSM V-Press 605 eco (400V) wi...    | 91 |
| 230010    | FLEX TAPE Semi automatic Carton Sealer 48-72mm (Kra...         | 60  | 440150     | Waste baler HSM V-Press 610 eco 12 tons, 120 kN 100kg b...   | 92 |
| 230020    | Automatic Carton Sealer Machine AUTO-TAPE 48-72mm ...          | 61  | 440170     | Industrial cardboard baler HSM V-Press 818 plus 18,5 tons... | 92 |
| 230022    | AUTO&FOLD-5050 automatic box taper machine Kraft/B...          | 61  | 440250     | TONNA garbage baler 240L – 2 tons pressing force             | 93 |
| 230030    | TOP TAPE Automatic Box Taping Machine Carton Sealer ...        | 62  | 440260     | TONNA1100 bin press E1100L – 3 ton pressing force            | 93 |
| 230034    | RUBBER automatic box taper machine 48-60mm (Kraft ...          | 62  | 440300     | Box baler TONNA E60 3 tons, 30kN, bale 60kg                  | 94 |
| 230040    | FLEX BOX Semi automatic Case Erector                           | 63  | 440310     | Cardboard Baler TONNA E80 PLC 4 tons, bale 80kg              | 94 |
| 230050    | Automatic Case Erector Machine AUTOBOX – 16 cases/mi...        | 63  | 440330     | Film and Paper baler machine TONNA T-Portable                | 95 |
| 230052    | AUTOBOX10 automatic case erector – 10-15 cases/min             | 64  | 450010     | Cardboard perforator machine HSM ProfiPack C400              | 95 |



|           |                                                               |     |           |                                                                |     |
|-----------|---------------------------------------------------------------|-----|-----------|----------------------------------------------------------------|-----|
| 450020    | Cardboard shredder HSM ProfiPack P425                         | 96  | 740280    | Diesel Generator 20kW SDG20 – BAUDOUIN engine – W...           | 110 |
| 450030    | Cardboard shredder GREE XS 420mm                              | 96  | 740282    | Diesel Generator 32kW SDG32 – BAUDOUIN engine – Wa...          | 111 |
| 450040    | Cardboard shredder machine GREE ES 422mm                      | 97  | 740285    | Diesel Generator 52 kW SDG50 – BAUDOUIN engine – W...          | 111 |
| 550100    | PET strap – 12mm or 15,5mm, 19mm, 25mm or 32mm                | 31  | 740290    | Diesel Generator 108 kW SDG108 – BAUDOUIN engine – ...         | 112 |
| 550100_01 | PET strap 12-32 mm pallet – 60 units                          | 31  | 750020    | Floor scrubber J25 – 1600 m²/h efficiency                      | 112 |
| 550206    | Plastic PP polypropylene strap – 12mm or 15,5mm               | 32  | 750020_01 | Floor Scrubber Squeegee Blades J25 – Absorbent Rubbe...        | 117 |
| 550301    | Textile strap for waste bales 16mm – 340m – 4 units           | 32  | 750020_02 | Floor Machine Brushes J25                                      | 117 |
| 550310_02 | Woven Polyester Strap 16mm or 19mm – Ø76mm                    | 33  | 750040    | Commercial floor scrubber J45 – 2100 m²/h efficiency           | 113 |
| 550390_01 | Cord strap 13 – 32 mm – 54 units – pallet                     | 33  | 750040_01 | Floor scrubber squeegee blades SMITH J45 – Absorbent ...       | 118 |
| 550390_02 | Cord strapping WG 13mm, 16mm, 19mm, 25mm or 32m...            | 34  | 750040_02 | Floor Machine Brushes J45                                      | 118 |
| 550521_01 | Adhesive tape BOPP 48mm/66m brown/transparent – 7...          | 82  | 750060    | Industrial floor scrubber J85 – 3550 m²/h efficiency           | 113 |
| 550521_02 | Adhesive tape BOPP 48mm/66m brown/transparent – p...          | 83  | 750060_01 | Floor Scrubber Squeegee Blades J85 – Absorbent Rubb...         | 119 |
| 550601_02 | Stretch film 500 mm/23 my – 5 kg – 120 units – 1 pallet/60... | 83  | 750060_02 | Floor Machine Brushes J85                                      | 119 |
| 550603_01 | 40x Hand Stretch Film 500mm/23my – (3 kg) – carton/6 ...      | 84  | 750080    | Ride on floor scrubber SMITH J115 – 5600 m²/h efficiency       | 114 |
| 550608_01 | Stretch film – 500mm/23my – 16 kg – for pallet wrapping ...   | 84  | 750080_01 | Floor Scrubber Squeegee Blades J115                            | 120 |
| 550608_02 | Machine stretch film, 500mm/23my – Standard A – mach...       | 85  | 750080_02 | Industrial Floor Cleaner J115 – Brushes                        | 120 |
| 550609_02 | Machine PRESTRETCH stretch film 500mm/23my power ...          | 85  | 750100    | Ride-on sweeper SMITH JB1350 – 8000 m²/h efficiency            | 114 |
| 550655    | POF shrink film – Heat shrink wrap – 15my – Width 200-5...    | 86  | 770010    | SMITH Battery Operated Stacker 2.5m 250cm 1500 kg              | 98  |
| 550680_01 | 12mm OPP strapping band for automatic strapping mac...        | 34  | 770010_01 | SMITH Electric Stacker CLJB – Battery (12/100 V/Ah)            | 121 |
| 550682_01 | OPP banding tape 30 mm – 150 m – inner diameter of rol...     | 35  | 770020    | SMITH Pallet Stacker 3,5 m 350 cm 1500 kg                      | 99  |
| 550685_01 | 30mm Paper band for Automatic Banding Machine – 150...        | 35  | 770030    | Pallet Lift Stacker SMITH S-Ride with Stand 2.6m 260cm ...     | 99  |
| 550690_01 | Paper band 12 mm – 150 m – inner diameter of roll 40 m...     | 36  | 770030_01 | SMITH Battery for Electric Stacker CLE – with S-Ride plat...   | 121 |
| 550700    | Steel strap 16mm, 19mm, 25mm or 32mm – 25kg – Coate...        | 36  | 770040    | SMITH Electric Stacker Forklift Stand-on S-Ride 3.6m 36...     | 100 |
| 550700_01 | Steel strap 16mm, 19mm, 25mm or 32mm – 1000kg – Coa...        | 37  | 770050    | SMITH Electric pallet truck 1500 kg 200mm                      | 100 |
| 550700_02 | Steel strap for binding 16mm, 19mm, 25mm or 32mm – 2...       | 37  | 770060    | SMITH Powered Pallet Truck Walkie – Li-ion battery – 150...    | 101 |
| 660010    | Dispenser cart for PET/PP strap – 405/406mm                   | 38  | 770062    | SMITH pallet jack scale SLL3C 1530 – load capacity 1500 k...   | 101 |
| 660020    | Textile Strap Dispenser Cart Ø76mm                            | 38  | 770070    | SMITH Electric Forklift   3-Wheel Electric Lift Truck 1500...  | 102 |
| 660030    | Dispenser Cart for Steel strap HS5                            | 39  | 770080    | SMITH Electric forklift truck XE25A 2500 kg 300 cm             | 102 |
| 660050    | Dispenser Cart for Cord/PP band HC2 – Ø200mm                  | 39  | 770088    | Enclosed Cab Electric Forklift 3.5 Ton XE4535A 4500 m...       | 103 |
| 660300    | Seals for plastic PP strapping 13mm or 16mm                   | 40  | 770090    | Walkie Stacker Forklift SMITH, Semi-electric, 1500kg 350...    | 103 |
| 660320    | Wire buckles, clips, clamps for textile/composite strappin... | 40  | 770100    | SMITH Self-lifting electric stacker 500kg 1500mm               | 104 |
| 660390    | Steel strap clips 16x40mm – for manual strapping – 1000 ...   | 41  | 770110    | Electric Hand Stacker SMITH Heavy-duty 2000kg, 2 tons...       | 104 |
| 660395    | Clips for steel strapping for pneumatic strapping – 16-32 ... | 41  | 770200    | SMITH lithium-ion pallet jack 2000kg XT2                       | 105 |
| 740000    | 3kW Gasoline Generator NL3500                                 | 106 | 770200_01 | SMITH battery 48 V / 10 Ah for the XT2 electric pallet truck   | 122 |
| 740020    | 5kW Gasoline Generator NL6500                                 | 107 | 770200_02 | SMITH 2A charger (EU) for the XT2 electric pallet truck        | 122 |
| 740100    | Inverter generator 3500 watt 4500iE                           | 107 | 780010    | SMITH AS-X6 scissor lift, maximum platform height 5.8 ...      | 115 |
| 740150    | Silent Inverter Generator 9kW                                 | 108 | 780020    | SMITH AS-X1012 electric scissor lift, working height 12 m, ... | 115 |
| 740210    | 5kW Diesel Generator 6500SE                                   | 108 | –         | ASTRA High-speed Automatic Strapping Machine 9-12m...          | 50  |
| 740230    | Diesel Generator 7kW 9500SE                                   | 109 | –         | Kraft paper tape 50mm 50m – 72 units                           | 86  |
| 740250    | 8kW Diesel Generator 11000SE                                  | 109 | –         | Paper Strap 9-15mm                                             | 42  |
| 740270    | Diesel Generator 10kW SDG10                                   | 110 | –         | Diesel forklift FX3 3500kg, 300cm                              | 105 |

“We are extremely pleased to have been partnering with Robomatis, they are always willing to help and supply us with just the right machines for our job.

**Epcos Croatia d.o.o – Croatia**

Mrs. Alenka Hojka Prohaska

“The flexibility in supplying us with the right product for every task is crucial for us. A great partner.

**jptprotech.se – Sweden**

Mr. Rickard Nilsson

“A reliable partner is crucial in every business. With Robomatis, all the orders to date have been fulfilled as agreed, and the machines work perfectly. It's always a pleasure to collaborate with such a professional team.

**Brdnik – Slovenia**

Mr. Simon Logar

“Apart from highly capable machines and tools, we really appreciate the responsiveness of the team and fast delivery. It makes all the difference in a highly demanding production like ours.

**Relaxroll.de – Germany**

Mr. Matia Buc

“We have been looking for a partner for packing materials and packing machines that you can rely on, it is convenient and supplies ordered goods within the time you have agreed upon. We are very pleased with the delivery, quality and price for now.

**Regal d.o.o. – Slovenia**

Mr. Danilo Knap




# ROBOMATIS



**TONNA**



Highest Creditworthiness





[www.batterystrapping.com](http://www.batterystrapping.com)

# ROBOMATIS